

## Jammu &amp; Kashmir

## OFFICE OF THE EXECUTIVE ENGINEER PHE DIVISION SOPORE

No:- 11016-23  
 Dated:- 23-01-2024  
 Time of Compl.: 180 days

M/s Mohammad Abdullah Pujoo  
 S/o: Haji Ghulam Hassan Pujoo  
 R/o: Sultanpora Pattan Baramulla  
 Reg. No.: CE/AAY/Sgr./02(Two)/AAY (Civil & Sanitary)/2019-20

**Subject:** Construction/Testing/Commissioning of Filtration Plant's along with allied works in different Divisions/ Districts of Kashmir Province under Jal Javeen Mission.

**Ref:** 1. Chief Engineer Kmr Jal Shakti PHE Department Sgr's E- NIT No. 18 of 2023-24 , dated: 14-07-2023, issued under endorsement No: CE/ PHE/ JJM/12817-35 dated: 14-07-2023 & up-loaded on tender portal with tender Id from 2023 PHE 221667\_1-51.  
 2. Chief Engineer Kmr PHE Jal Shakti Department Sgr's Letter of Acceptance issued under No. CE/PHE/K/E&T/JJM/17557-64, dated: 22-08-2023.  
 3. Letter of intent issued vide this office No:-JS/PHE/DB/Spr./5813-18 Dated 30-08-2023.  
 4. Superintending Hyd. Circle Sopore's authorization issued order No: SE/Hyd./DB/11036-49 dated: 12-01-2024.

For and on behalf of Lt. Governor of Jammu and Kashmir Union Territory, contract for the work namely "Construction and successful Testing and Commissioning of 0.10 MGD Rapid Sand Filtration Plant Comprising of Filter House, Clarifluculator, Flash Mixer, With all Electromechanical components for W.S.Scheme Sarie Dangerpora under Jal Jeevan Mission." is hereby allotted to you in accordance with the terms and conditions as laid down in the bid document read with any amendment if any for an amount of **Rs. 9851490.00 (Rs. Ninety Eight Lacs Fifty One Thousand Four Hundred and Ninety only)** as per the following item rates along with your quoted overall tender appreciation of **4.70% (Eight percent)**

A Rates:					
S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
1	Earth work in bulk excavation by mechanical means (hydraulic excavator) over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth lead upto 50 meters and lift upto 1.5 m, as directed by Engineer-in-Charge. (All kinds of soil)	Cum	159.69	188.75	30141.48
2	Earth work in bulk excavation by manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth lead upto 50 meters and lift upto 1.5 m, as directed by Engineer-in-Charge. (All kinds of soil)	Cum	17.74	539.35	9568.06

Head Draftsman  


Technical Officer  


Exen  


## Construction of 0.10 MGD RSFP at Sarie Dangerpora

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
3	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m.	Cum	50.00	198.7	9935.00
4	Providing and laying hand packed stone soling 50 mm nominal size including filling, spreading, dressing, ramming, all leads lifts and all carriages complete.	Cum	88.95	1320	117421.92
5	Supply and filling of filter media from approved source - Gravel (Graded gravel - size ranging from 2.0mm to 40.00 mm) in filter beds. Including all carriages, complete job	Cum	3.00	7700	23100
7	Supply and filling of filter media from approved source - Sand (Coarse filter sand - in filter beds. Including all carriages, complete job	Cum	4.95	7968	39441.60
8	Supplying and filling in plinth with fine sand under floors including, watering, ramming, consolidating and dressing complete.	Cum	5.06	787.40	3981.48
9	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with:1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 40 mm nominal size)	Cum	3.00	6434.01	19303.00
10	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with:1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 40 mm nominal size)	Cum	17.70	5399.02	95563.00
11	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 mm nominal size)	Cum	15.46	4861.84	75182.03
12	Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	24.31	7800.76	189636.47
13	Reinforced cement concrete work in walls (any thickness) including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts upto floor five level including curing but excluding cost of centering shuttering, finishing and reinforcement.1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	20.65	9408.14	194278.09

Head Draftsman

Technical Officer

Exen



## Construction of 0.10 MGD RSFP at Sarie Dangerpora

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
14	Reinforced cement concrete work in beams, suspended floors, roofs having slope upto 15°, landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases upto five level including curing but excluding the cost of centring, shuttering, finishing and reinforcement with: 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	Cum	29.24	9849.35	287995.00
15	Providing and laying in position machine batched and machine mixed design mix M-25 grade cement concrete for reinforced cement concrete work, using cement content as per approved design mix, including pumping of concrete to site of laying but excluding the cost of centering, shuttering, finishing and reinforcement, including admixtures in recommended proportions as per IS: 9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability as per direction of Engineer-incharge. Note: - Cement in this item is @ 330 kg/ cum. Excess or less cement used as per design mix is content considered payable or recoverable separately.				
15.1	All works upto plinth level upto floor V Level.	Cum	14.78	7911.26	116928.42
15.2	All works above plinth level upto floor V level	Cum	52.04	9302.98	484127.07
16	Extra for providing richer mixes at all floor levels. Note:- Excess/ less cement over the specified cement content used is payable/ recoverable separately. Providing M-30 grade concrete instead of M-25 grade BMC/RMC. (Note:- Cement content considered in M-30 is @ 340 kg/cum)	Cum	66.82	111.87	7475.15
17	Centering and shuttering including strutting, propping etc. and removal of form for: Foundations, footings, bases of columns etc. for mass concrete.	sqm	26.03	262.3	6827.66
18	Centering and shuttering including strutting, propping etc. and removal of form for: Walls (any thickness) including attached pilasters, buttresses, plinth and string courses etc.	sqm	553.66	573.85	317717.79
19	Centering and shuttering including strutting, propping etc. and removal of form for: Suspended floors, roofs, landings, balconies and access platforms.	sqm	168.28	635.6	106958.76
20	Centering and shuttering including strutting, propping etc. and removal of form for: Lintel, beams, plinth beams, girders, bressumers and cantilevers.	sqm	111.09	502.85	55861.60
21	Centering and shuttering including strutting, propping etc. and removal of form for: Columns, pillars, piers, abutments, posts and struts.	sqm	154.28	680.15	104933.54
22	<b>Extra for shuttering in circular work (20% of respective centering and Shuttering items):</b>				0
22.1	Foundations, footings, bases of columns etc. for mass concrete.	sqm	5.88	52.46	308.46
22.2	Walls (any thickness) including attached pilasters, buttresses, plinth and string courses etc.	sqm	165.96	114.77	19047.22
22.3	Columns, pillars, piers, abutments, posts and struts.	sqm	15.00	127.12	1906.80
23	Centering and shuttering including strutting, propping etc. and removal of form for .Edges of slabs and breaks in floors and walls	RM	200	242.3	48460

Head Draftsman


Technical Officer

Exen

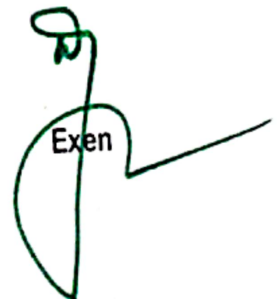


## Construction of 0.10 MGD RSFP at Sarie Dangerpora

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
24	Providing and mixing water proofing material in cement concrete work in doses by weight of cement as per manufacturer's specification. (1 kg of water proofing material in 50 kg of cement)	kgs	400.95	57.9	23215.00
25	Steel reinforcement for R.C.C. work ready to use "cut and bend" rebars of approved make from factory/workshop to construction site including placing in position and binding all complete upto and above plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	Kg	15110.03	87.18	1317292.41
26	Brick work with common burnt clay (non-modular) bricks of class designation 7.5 in foundation and plinth including curing in : Cement mortar 1:4 ( 1 cement : 4 coarse sand)	Cum	30.14	7476.38	225338.00
27	Extra for brick work with common burnt clay bricks/cement concrete bricks in superstructure above plinth level upto floor five level	Cum	30.14	1522.2	45879.10
28	Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia and length (hold fast lugs or with dash fasteners shall be paid for separately): First class kail wood	Cum	2.01	106894.15	214857.00
29	Providing and fixing panelled or panelled and glazed shutters for doors, windows and clerestory windows fixing with butt hinges of required size with necessary screws, excluding panelling which will be paid for separately, all complete as per direction of Engineer-in-charge. Second kail wood (30 mm thick shutter)	sqm	43.15	2489.75	107432.71
30	With float glass panes of 8 mm thickness (weight not less than 20.0 kg / sqm)	sqm	24.00	1807.14	43371.36
31	Providing and fixing fly proof wire gauge to windows and clerestory windows using wire gauge with average width of aperture 1.4 mm in both directions all complete. With Galvanized M.S. Wire gauge with wire of dia 0.63 mm, With 2nd class teak wood beading 62x19 mm	sqm	28.638	1274.05	36486.24
32	Providing and fixing 1mm thick M.S. sheet door with frame of 40x40x6mm angle iron and 3mm M.S. gusset plates at the junctions and corners, all necessary fittings complete, including applying a priming coat of approved steel primer. Using M.S. angles 40x40x6mm for diagonal braces.	sqm	6	4352.95	26117.70
33	Steel work welded in built up sections/framed work including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.	Kg	990.855	146.63	145289.06
34	Providing and fixing hand rail of approved size by welding etc. to steel ladder railing, balcony railing, staircase railing and similar works, including applying priming coat of approved steel primer. 40mm dia	Kg	323	172.9	55846.70

  
Head Draftsman

  
Technical Officer

  
Exen

**Construction of 0.10 MGD RSFP at Sarie Dangerpora**

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
35	Structural steel work in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete. Welded	Kg	5939.61	102.14	606671.71
36	Supplying and fixing rolling shutters of approved make, made of required size M.S. laths, interlocked together through their entire length and jointed together at the end by end locks, mounted on specially designed pipe shaft with brackets, side guides and arrangements for inside and outside locking with push and pull operation complete, including the cost of providing and fixing necessary 27.5 cm long wire springs manufactured from high tensile steel wire of adequate strength conforming to IS:4454 part-1 and M.S. top cover of required thickness for rolling shutters 80x1.25 mm M.S. laths with 1.25 mm thick top cover	sqm	10	3238.2	32382
37	Providing and fixing ball bearing for rolling shutters.	each	4	483.1	1932.40
38	Cement concrete flooring 1:2:4 (1cement: 2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat cement including cement slurry and curing complete, but excluding the cost of nosing of steps etc. complete. 50 mm thick with 20mm nominal size stone aggregate.	sqm	60	505	30300
39	Applying Priming Coat With ready mixed red oxide Zinc Chromate primer of approved brand and manufacture on steel galvanized iron/steel works	sqm	205.08	52.75	10817.97
40	Providing and laying Ceramic glazed floor tiles 300x300 mm (thickness to be specified by the manufacturers) of 1st quality conforming to IS: 15622 of approved make, laid on 20 mm thick bed of cement mortar 1: 4 ( 1 cement : 4 coarse sand) including skirting in vertical & pointing the joints with white cement and matching pigment etc., complete in colour such as White, Ivory, Grey, Fume, Red Brown (as directed by the Engineer incharge)	sqm	150.00	1210.66	181599.00
41	Flooring with marble stone of specified thickness as per sample of marble approved by Engineer-in-charge, over 20 mm (average) thick base of cement mortar 1:4 (1 cement:4 coarse sand) laid and jointed with grey cement slurry including skirting in vertical, rubbing, polishing and curing complete with: Makrana White Second quality (16mm)	sqm	180.00	6175.39	1111570.00
42	15mm Cement plaster finished with a floating coat of neat cement of mix 1 : 4 ( 1 cement : 4 fine sand)	sqm	801.78	278.6	223375.90
43	Finishing walls with water proofing cement paint of required shade on New work (two or more coats applied @ 3.84 kg/10sqm)	sqm	450.89	91.8	41391.70
44	providing and fixing panelled or panelled and glazed shutters for doors, windows and clerestory windows (area of opening for panel inserts excluding portion inside grooves or rebates to be measured. Panelling for panelled or panelled and glazed shutters 25mm to 40mm thick. first class kail wood.	sqm	8.2	2501.25	20510.25

  
Head Draftsman

  
Technical Officer

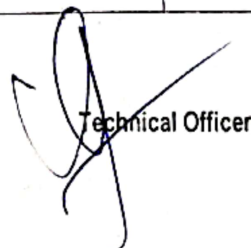
  
Exen



## Construction of 0.10 MGD RSFP at Sarie Dangerpora

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
45	Providing and fixing 4 mm thick glass pane (weighing not less than 10 kg/sqm)	sqm	12	1768.05	21216.60
46	Distemping with oil bound washable distemper of approved brand and manufacture to give an even shade on New work (two or more coats) over and including priming coat with water thinnable cement primer.	sqm	300	149.05	44715
47	Providing and fixing aluminum handles ISI marked anodized (anodic coating not less than grade AC 10 as per IS: 1868) transparent or dyed to required colour and shade with necessary screws etc. complete 100 mm	each	80	52.3	4184
48	Providing and fixing aluminum tower bolts ISI marked anodized (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade with necessary screws etc. complete : 150x10 mm and 100x10 mm as per site requirement.	each	100	80.35	8035
49	Providing corrugated G. S. sheet roofing including vertical/curved surface fixed with polymer coated J or L hooks, bolts and nuts 8mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (upto any pitch in horizontal/vertical or curved surface)excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 0.50 mm thick with zinc coating not less than 275 gram/m <sup>2</sup>	sqm	130.00	830.25	107932.00
50	Providing ridges or hips of width 60cm overall width plain G.S. sheets fixed with polymer coated J. or L hooks, bolts and nuts 8mm dia G.I. limpet and bitumen washers complete 0.50 mm thick with zinc coating not less than 275 gram/m <sup>2</sup>	m	50	626.70	31335.00
51	Providing & fixing of PVC under drainage laterals with specifications conforming to IS-4985 & IS-15801, 8mm thick fabricated out of approved make with nominal dia of 9mm perforations as per design of bed provided at 60 degrees along with PVC Tees and end caps grouted in concrete, the pressure rating of 10kg/sq cm 75 mm dia	m	60	1420	85200
52	<b>Providing, fitting, testing and commissioning of following items for Flash Mixer: Mixing device with reduction gear system 3-phase Electrically driven motor 1.0 HP, Foundation Base plate and Starter along with necessary wiring upto motor</b>				0
52.1	1.0 HP	Job	2	4800	9600
52.2	Foundation / Base plate	SET	1	4548	4548
52.3	Starter along with necessary wiring upto motor	No	1	1680	1680
53	<b>Providing and fixing of MS flanged joints (12mm thick) to double flanged GI/DI pipes including cutting of pipes, welding charges, cutting of flanges, rubber gasket, bolts, nuts including testing of joint and all sorts of carriages. Complete Job.</b>				0
53.1	100 mm dia. pipe	Joint	6	1520	9120

  
Head Draftsman

  
Technical Officer

  
Exen

**Construction of 0.10 MGD RSFP at Sarie Dangerpora**

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
53.2	150 mm dia. pipe	Joint	20	2150	43000
53.3	200 mm dia. pipe	Joint	6	3480	20880
54	Providing and fixing aluminum work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixed with dash fastener of required dia. and size including necessary filling up of gaps at junctions i.e. at top, bottom and sides with required EPDM rubber / neoprene gasket felt etc. Aluminum sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminum snap beading for glazing / panelling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-Charge (glazing, panelling and dash fasteners to be paid for separately)				
54.1	Anodized aluminum (Anodized transparent or dyed to required shade according to IS:1868, minimum anodic coating of grade AC 15)	Kg	32.52	459.31	14936.76
55	Electrical Items: Supplying and fixing of 25mm dia. medium class PVC conduit along with accessories in surface/recess including cutting the wall and making good the same in case of recessed conduit as required.	m	200	103.500	20700
56	Providing and carrying out wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable etc. as required. (excl. cost of conduit)	Point	60	824.550	49473
57	Providing and carrying out wiring for twin control light point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, 2-way modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable etc. as required. (excl cost of conduit)	Point	15	1,215.55	18233.25
58	Providing and carrying out wiring for heating points with 4.0 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, modular combined S&S 16Amp along with modular plate, suitable GI box and earthing the point with 2 sq.mm FRLS PVC insulated copper conductor single core cable etc. as required. (excl cost of conduit) Providing and carrying out circuit/ sub main wiring along with earth wire with the following sizes of FRLS PVC insulated copper conductor, single core cable in surface/ recessed medium class PVC conduit as required. (excl. cost of conduit)				0
58.1	2 x 4 sq. mm + 1 x 4 sq. mm earth wire	m	175	230.000	40250

  
Head Draftsman


  
Technical Officer

  
Exen

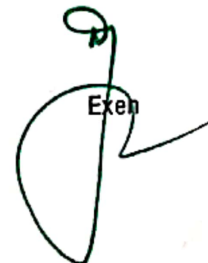


Page No: 8<sup>th</sup>  
Construction of 0.10 MGD RSFP at Sarie Dangerpora

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
59	Supplying and fixing suitable size GI box with modular plate and cover in front on surface or in recess, including providing and fixing 6 pin 5/6A & 15/16 A modular socket outlet and 15/16 A modular switch, connections etc. as required.	No.	2	569.25	1138.50
60	Supply of 1200 mm sweep Ceiling Fans complete in all respects. Confirming to relevant Indian Standards	No.	4	2,125.00	8500.00
61	Supply of 200 mm nominal sweep Exhaust Fans including shutter from outside complete. Confirming to relevant Indian Standards	No.	4	1,550.00	6200.00
62	Providing and laying of armoured cable 95mm, 3.5 core for main service line of reputed make in P.V.C pipes of required dia to accommodate the service line including bends etc., from main transformer to the main panel board including copper thimbles, earth work excavation and filling for laying of cable complete.	m	60	325.000	19500
63	<b>Providing and fitting at site 3-phase, Voltage stabilizer of following ratings, oil emersed, of standard make and quality including accessories as required. The job includes making of connections with main panel board and service line. To be paid in fitted and finished form after testing on full load capacity, complete job.</b>				0
63.1	30 KVA	Job	1	47000.00	47000
64	Providing and fitting of panel board with angle iron supports and A.C. sheets for fixing of MCCB, change over switch, bus bars etc. The job includes nuts bolts and embedding of supports in cement concrete blocks complete job.	Job	1	4,250.00	4250
65	<b>Providing and fitting of:</b>				0
65.1	100 Amp 4 pole change over of reputed make.	No	2	7,598.00	15196
65.2	100 Amp-Copper bus bar	No	2	4,550.00	9100
65.3	100 Amp MCCB	No	2	3,300.00	6600
65.4	63 Amp MCCB	No	2	2,700.00	5400
65.5	40 Amp MCCB	No	3	2,100.00	6300
65.6	16 Amp MCCB	No	1	1,250.00	1250
65.7	3-phase indicator points	No	3	445.000	1335
65.8	3-phase Voltmeter and Amperemeters	No	3	1190.00	3570
66	<b>Providing, fitting, testing and commissioning of following items for Alum Dosing Unit- Mixing device with reduction gear system.</b>				0
66.1	Mixing device with reduction gear system.	No.	1	2500	2500
66.2	3-phase electrically driven motors 1.0HP	No.	1	4800	4800

  
Head Draftsman

  
Technical Officer

  
Exen



**Construction of 0.10 MGD RSFP at Sarie Dangerpora**

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
66.3	Foundation / Base plate	Set	1	4548	4548
66.4	Starter along with necessary wiring upto motor	No	1	1680	1680
66.5	P.V.C outlet, overflow system with fittings upto point of application	Lot	1	530	530
66.6	150mm dia drain out let	Lot	1	1350	1350
66.7	50 mm dia Service water piping.	Lot	1	530	530
66.8	Constant dosing unit with time device	Set	1	1500	1500
66.9	Manually operated hoist	Set	1	10000	10000
67	<b>Providing, fitting, testing and commissioning of following items for Chlorine Dosing Unit:-</b>				0
67.1	Mixing device with reduction gear system.	No	1	2500	2500
67.2	3-phase electrically driven motors: 1.0 HP	No	1	2800	2800
67.3	Foundation / Base plate.	Set	1	4548	4548
67.4	P.V.C outlet, overflow system with fittings upto point of application.	Lot	1	530	530
67.5	Starter along with necessary wiring upto motor	No	1	1680	1680
67.6	150 mm dia Drain out let	Lot	1	1350	1350
67.7	50mm dia service water piping	Lot	1	530	530
67.8	Constant dosing unit with time device.	Set	1	1500	1500
68	<b>Providing fitting, testing and commissioning of air blower standard make ISI mark capable of providing compression @ 0.35 kgs/sqcm coupled with suitable 3 phase induction electric motor complete with auxiliary pipe system upto filter beds with pressure guage, Nozzles, foundation block, base plate, air check valve, non- return valve, Starter etc</b>				0
68.1	4.2 KLPM Air blower with 5.0 HP Motor.	No	1	87500	87500
69	<b>P/F testing and commissioning of MS Rotating Desludging Bridge comprising of following items:</b>				0
69.1	Structural steel work in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete for the Installation Testing and Commissioning of Half Bridge with Central Drive mechanism, scrapper and churners for required dia Clarifer. Welded	Kg	1604.8 2	102.14	163916.31
69.2	Finishing with Epoxy paint (two or more coats) at all locations prepared and applied as per manufacturer's specifications including appropriate priming coat, preparation of surface, etc complete on steel Work Quantity	Sqm	200	188.8	37760

  
Head Draftsman

  
Technical Officer

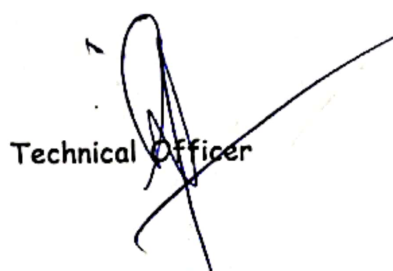
  
Exen

Page No: 10th  
Construction of 0.10 MGD RSFP at Sarie Dangerpora

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
69.3	Central axle turn table with double bearing and guide for incoming cable.	SET	1	4800	4800
69.4	Peripheral drive assembly with following motors, gear box, rollers, drive trolley (60:1 reduction gear box). Pumping unit with 5.0 HP Motor.	No.	1	24268	24268
69.5	Starter along with necessary wiring upto motor	No.	1	1680	1680
69.6	Flocculator drive assembly with crown wheel, pinion sets, reduction gear (40:1) with motors 1.0 HP complete job.	No.	1	7300	7300
69.7	Incoming cable, telescopic electric pole with rotary current collector	No	1	6500	6500
70	Providing and fixing D.I. sluice valves Class 1 (with cap) complete with rubber insertions, bolts, nuts, extent iron rod, joint connector, supporting pedestal with base plate, top plate and necessary anchoring bolts etc. (the tail pieces if required will be paid separately). Confirming to IS:14846 read with latest amendments.				
70.1	150 mm dia. Class 1	No	10.00	26720.0	267200.00
70.2	85mm Dia Class 1	No	2.0	14058.0	28116.00
70.3	200 mm dia. Class 1	No	2.0	42300.0	84600.00
70.4	100mm dia Class 1	No	2.0	17210.0	34420.00
71	Providing, installation of 1 cusec capacity pump with all electro mechanical components for disposal of silt/sludge from master chamber upto nearby disposal nallah upto 50 meters as directed by engineer in charge. The pump should be ISI mark especially Darling make, paid only after production of VAT Bill from the manufacturer including all sorts of carriage complete Job.	Job	1	160000.00	160000.00
72	Providing/ Fixing, installation, successful commissioning of double flanged MS pipes/specials to be fabricated from MS tube heavy quality nominal thickness 6mm, conforming to relevant Indian Standard IS-1239 and/or IS 1161 read with up to date amendments. The pipe material should be of standard quality and must withstand all the anticipated design pressure ratings. The work should be leak proof and should be painted with anti corrosive red oxide primer. Complete Job.	Kg	5028.396	147	739174.21
73	Carriage of materials by mechanical transport including loading, unloading, stacking of materials.				0
73.1	Cement & Steel for avg lead 10km	MT	103.35	249.35	25770.32
73.2	Stone Agg 20mm /sand for avg lead 25 km	Cum	241.60	402.29	97193.26
73.3	Stone soling for avg lead 10km	Cum	88.96	330.39	29391.49
73.4	Bricks for avg lead 55 km	No.	14314	2	28628
	<b>TOTAL</b>				<b>9409255.41</b>
	<b>Above 4.70% on account of tender appreciation</b>				<b>442235.00</b>
	<b>GRAND TOTAL</b>				<b>9851490.00</b>

Rates and quantities checked:

  
Head Draughtsman


  
Technical Officer

  
Executive Engineer  
Jal Shakti PHE Division  
Sopore




**B Terms and conditions:**

01. Total value of the work is **Rs. 9851490.00 (Rs. Ninety Eight Lacs Fifty One Thousand Four Hundred and Ninety only)** worked out on the basis of above quoted rates which includes all taxes, levies etc.
02. The work shall have to be completed by you successfully within a period of **180 days** only as per the approved proposals failing which penalty under rules shall be imposed upon you.
03. An agreement shall have to be drawn by you with the department within a period of 07 days from the date of issuance of allotment, failure to execute such a formal deed shall not however prevent the contract from being enforced upon you. However payment shall not be made unless the agreement is drawn.
04. Performance security equivalent to 5% of the value of the contract **Rs. 492574.00** valid in accordance with bid conditions, shall have to be furnished by you in shape of CDR/BG/FDR within a week from the date of issuance of this allotment order or at the time of signing of agreement whichever is earlier.
05. All other terms and conditions shall remain same as laid down in E-NIT/ Standard bidding document/PWD Form No 25 and GFR-2017.

  
**Assistant Accounts  
Officer**

  
**Technical officer**

  
**Executive Engineer  
Jal Shakti PHE Division  
Sopore**

**Copy to the:**

01. Mission Director Jal Javeen Mission Civil Secretariat Srinagar for favour of information.
02. Chief Engineer Kashmir Jal Shakti PHE Department Srinagar for favour of information.
03. District Development Commissioner Bandipora (Chairman DJJM) for favour of information.
04. Direction Planning Jal Shakti Civil Secretariat Srinagar for favour of information.
05. Superintending Engineer Hydraulic Circle Baramulla/Bandipora (Member Secretary JJM) for favour of information.
06. Assistant Executive Engineer PHE Sub Division Sumbal for information and necessary action.
07. M/S WAPCOAS Ltd Corporate office 76-C intuitional area sector 18 Gurgon for information.
08. File Concerned.