

11/02

Sh. Abdul Aziz Mir,

Ali Mohammad Mir,

R/o: Arampora Gbl.

Class:- DEE

Regd.No:- DK-SD/2601/1988-89.

Advertised cost :- 7.20 Laacs

Allotted Cost :- Rs.5,76,000/-

Time of completion:- 07 Days

Head of Acct. :- Jal Jeevan Mission (JJM)

Sub:- Fixation of contract for, Retro fitting of pipe network, extension/ Imptts. to sub-main and distribution system to Udder Yarimuqam, Astan Mohalla Dagpora, Gasi Mohalla Gadoora, Barsoo, Wandhama, Yungoora, New Habitation in Harran Sheerpathri, Fatehpore Dugpora etc. for WSS Udder Yarimuqam.

Ref:- Your tender in response to this office Short term e-NIT No:- 21/PHED/RWSD/Civil of 2020-21 (S. No.03). Issued under No:-3864 - 78, dated:- 20.07.2020. And this office letter of Intent No. 4306 - 09, dated:- 29.07.2020.

Allotment order No. RWSD/ 85 of 2020-21,

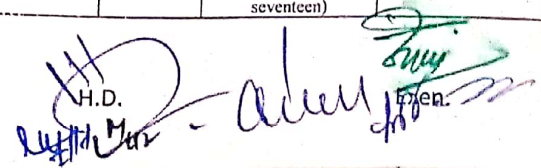
Dated:- 11-11-20

For and on behalf of the Lieutenant Governor of J&K U.T. the above noted work is hereby allotted to you, on your quoted rates, terms & conditions as laid down here under :-

A). RATES

S. No.	PARTICULARS	QTY.	Unit	RATE (Rs.)	AMOUNT (Rs.)
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (Not exceeding 1.5 mtr in width) and for shafts, wells, cesspits and the like not exceeding 1 Osqm on plan, depth upto 1.5mtr. including disposal of excavated earth upto 1 mtr from cutting edge, disposed earth is to be levelled and neatly dressed in:				
1.1	All kinds of Soil	951.29	Cum	290.00 (Two hundred ninety)	275874.10
1.2	Ordinary rock	15.48	Cum	550.00 (Five hundred fifty)	8514.00
2	Laying & fitting of GI pipes complete exclud. cost of pipes & earthwork:				
2.2	65 mm dia G.I. pipes	200.00	RM	37.72 (Thirty seven point seventy two)	7544.00
2.3	50 mm dia G.I. pipes	500.00	RM	22.20 (Twenty two point twenty)	11100.00
2.4	40 mm dia G.I. pipes	2000.00	RM	21.28 (Twenty one point twenty eight)	42560.00
2.5	25 mm dia G.I. pipes	2260.00	RM	19.00 (Nineteen)	42940.00
2.6	20 mm dia G.I. pipes	3800.00	RM	14.00 (Fourteen)	53200.00
3	Filling available excavated earth exclud. rock in trenches, plinth, sides of foundation etc in layers not exceeding 20 cm in depth consolidating each deposited layer by ramming and watering lead up to 50m and lift up to 1.5m.	871.39	Cum	103.00 (One hundred three)	89753.17
4	Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing Tee, including cutting and threading the pipe etc. complete				
4.1	25 to 40 mm nominal bore	30.00	Each	450.00 (Four hundred fifty)	13500.00
4.2	50 to 80 mm nominal bore	5.00	Each	1200.00 (One thousand two hundred)	6000.00
5	Carriage of pipes by Mechanical transport incld. loading, unloading and stacking from Divisional store upto dumping site of work, complete.				
5.1	Pipes (below 100 mm dia) for an avg. lead of 18 Kms	3.93	M.T.	163.19 (One hundred sixty three point nineteen)	641.34
5.2	Pipes (below 100 mm dia) for an avg. lead of 10 Kms	13.23	M.T.	122.17 (One hundred twenty two point seventeen)	1616.31

(K.T.O)

H.D. 

5.3	Pipes (below 100 mm dia) for an avg. lead of 06 Kms	2.57	M.T.	96.73 (Ninety six point seventy three)	248.60
	Carriage of pipes by manual labour incld. loading, unloading and stacking from dumping site to actual site of work, complete for an avg. lead of 300 Mtrs.				
6.1	Pipes	3.93	M.T.	95.72 (Ninety five point seventy two)	376.18
7	Provision for pipe specials	1.00	Job	22132.33 (Twenty two thousand one hundred thirty two point thirty three)	22132.33
G. Total :-					5,76,000/-
(Rupees; Five lacs & Seventy six thousand) only					

Rates & Qty. Checked
As per Comparative Statement

H.D.
[Signature]

[Signature]
T.O.

[Signature]
Exen.

B). Terms and Conditions:-

1. This letter of allotment and tender of the contractor will constitute a legal contract and the conditions as laid down in the detailed NIT/PWD form No:-25 & 33 (Double leaf) and hold good even before the drawal of agreement between the contractor and the Department.
2. The contractor is directed to attend the Divisional Office along-with his registration card for drawal of an agreement within a period of (07) days from the date of issuance of this letter of allotment and non-drawal of agreement with the Department does not exclude you from contractual obligations.
3. The total amount of the work on your above quoted rates works out to be **Rs.5,76,000/-** (Rupees; Five lacs & Seventy six thousand) only.
4. The work is to be completed within a period of 07 days to be reckoned after 3 days from the date of issue of this allotment. In case of any delay caused in the execution of work, penalty upto 10% shall be imposed upon the contractor or the department shall be at liberty to terminate the contract in part or in full (as the case may be) and the contract shall be completed through same other available sources at the risk and cost of the defaultiy agency after serving not more than two notices which should be strictly noted.
5. CDR No:- 2994826 dated:-24.07.2020 for Rs.14500/- is retained in the divisional office as security against the said work and will be released after successful testing, commissioning and handing over the complete contract to the department.
6. 10% of the amount of the bill shall be retained as "Normal Deposit" in all payments and suitable amount as may be deemed fit shall be held back for successful water test / commissioning of work till defective liability period.
7. All other terms and conditions will be the same as laid down in the detailed Master NIT of the year / PWD form No:-25 double agreement form.

[Signature]
Executive Engineer,

R. S. Division Ganderbal/ Sgr. *[Signature]*

No:- RWS/Allot/20/ 7720-24
Dated:- 11-11-20

Copy to the:-

1. Superintending Engineer Hydraulic Circle Srinagar for favour of information.
2. Asstt. Ex. Engineer RWS Sub-Division Ganderbal for information and n/action. He is directed to ensure the work is executed strictly within the provision of the estimate. The progress of work should be strictly monitored and incase of slow progress proper time bound notice should be issued to the contractor and incase the contractor fails to accelerate the progress of work, the case should be recommended for termination and action under rules shall be initiated against the defaulting agency accordingly.
3. Head Draftsman Divisional Office for information.
4. A.A.O. Divisional Office for information.

