

**OFFICE OF THE
EXECUTIVE ENGINEER SPECIAL SUB DIVISION GUREZ**

Allotment Order No. 10 EE/SSDG/2021-22

Dated 20/09/2021

5299622

M/s. ALAMDAR CONSTRUCTION
Prop: ETHISHAM ELAHI BHAT
R/o:- BANDIPORA
Regd. No:- 138/SE/Hyd/AAY/Hand/2004-05
GSTIN No:-01AUYPB7548L2Z4

Adv Cost of Work: -Rs.53.29 Lacs
Allotted Cost:- Rs.53,27,761.00
(Incl. Cost of Pipes)
Time of Completion: - 06 Months
Major Head: - JJM

SUBJECT:- Providing/laying and fitting of GI pipes including Construction of protection works, Intake Chamber near head site, 0.04 lac gallon SR, Sluice Chamber, supporting pillars for RWM at spots, Chain Link fencing around structures, Cattle troughs, for Retrofitting of WSS Banjran for 100% coverage of FHTCs.

Reference:- (i). Your tender in response to e-NIT No:- 24-EE/SSDG of 2021-22 issued under No. EE/SSDG/875-82 dated:-21/06/2021.
(ii). Authorization made by Superintending Engineer Hydraulic Circle Bla/Bpr H.Q Sopore endorsement vide No.4418 dt: 31/07/2021.
(ii). This office letter No. EE/SSDG/1949 dt: 07/08/2021 & No. EE/SSDG/1963-65 dt: 07/08/2021.

For and on behalf of Lt. Governor Union Territory of Jammu and Kashmir contract for the above mentioned work is fixed with you at an allotted cost of **Rs.53,27,761.00 (Rupees Fifty Three Lac Twenty Seven Thousand Seven Hundred Sixty One only)** (Incl. Cost of pipes) as worked out at the rates quoted/ offered/ negotiated and accepted by you against the items of the advertised rate list/ quantity schedule subject to fulfillment of the terms and condition stipulated hereunder:-

S. No	Particulars	Quantity	Unit	Allotted Rate	Amount (In Rupees)
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (Not exceeding 1.5 mtr in width) and for shafts, wells, cesspits and the like not exceeding 10sqm on plan, depth upto 1.5mtr. including disposal of excavated earth upto 1 mtr from cutting edge, disposed earth is to be leveled and neatly dressed in: All kinds of soil	938.91	Cum	400.00	375564.00
1.1	Ordinary rock	394.96	Cum	520.00	205379.20
2	Providing/laying and fitting of GI pipes in trenches as per IS: 1239 of 2004 and amendments thereof including P/fixing of pipe fittings Including all carriages Mechanical transport and Head lode 100mm dia pipe (Light grade)	560.00	RM	1325.00	742000.00
2.1	80mm dia pipe (Light grade)	600.00	RM	900.00	540000.00
2.2	65mm dia pipe (Light grade)	1000.00	RM	735.00	735000.00
2.3	50mm dia pipe (Light grade)	1000.00	RM	560.00	560000.00
2.4	40mm dia pipe (Light grade)	400.00	RM	450.00	180000.00
2.5	25mm dia pipe (Light grade)	450.00	RM	290.00	130500.00
2.6	20mm dia pipe (Light grade)	450.00	RM	210.00	94500.00
2.7	15mm dia pipe (Light grade)	400.00	RM	168.00	67200.00
3	Making connection of GI distribution branch with GI main of following sizes by providing & fixing of Tee including cutting & threading the pipe etc. Complete: 15mm dia nominal bore FHTC,s to household including cost of water meter and bibcock. Including all carriages Mechanical transport and Head lode	33.00	No	1700.00	56100.00

Head Draftsman

contd. On 2nd

Executive Engineer

SUBJECT:- Providing/laying and fitting of GI pipes including Construction of protection works, Intake Chamber near head site, 0.04 lac gallon SR, Sluice Chamber, supporting pillars for RWM at spots, Chain Link fencing around structures, Cattle troughs, for Retrofitting of WSS Banjran for 100% coverage of FHTCs

p-2nd

4	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundation etc. Layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering lead upto 50m and lift upto 1.5m.	1062.57	Cum	188.00	199763.16
5	Providing/fixing of regulating devices including all carriages complete: 65mm dia Sluice valve Including all carriages Mechanical transport and Head lode	2.00	No	10000.00	20000.00
-5.1	50mm dia Sluice valve	2.00	No	8000.00	16000.00
6	Pr/fixing of MS control valve chamber size 0.60x0.60x0.60 fabricated out of 5mm thick MS plate including hire charges of DG set, generator, welder & all carriages complete job. (2No) Including all carriages Mechanical transport and Head lode	174.00	Kgs	130.00	22620.00
7	Providing and laying of stone soling (hand packed) in excavated trenches including carriage by mechanical transport at site of work Including all carriages Mechanical transport and Head lode	10.89	Cum	1500.00	16335.00
8	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centering and shuttering. All work upto plinth level with: 1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 mm nominal size) Including all carriages Mechanical transport and Head lode	8.83	Cum	5300.00	46799.00
9	Providing/laying in position specified grade of reinforced cement concrete including curing but excluding cost of centering, shuttering, finishing & reinforcement. All works upto plinth level 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size): Including all carriages Mechanical transport and Head lode Base/Raft	6.79	Cum	8500.00	57715.00
9.1	Walls	17.69	Cum	9800.00	173362.00
9.2	Ring beam	0.95	Cum	9800.00	9310.00
9.3	Dome	1.43	Cum	10000.00	14300.00
9.4	Slab	1.02	Cum	9850.00	10047.00
10	Providing/laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing & reinforcement. All works upto plinth level 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size) Including all carriages Mechanical transport and Head lode	30.56	Cum	7000.00	213920.00
11	Mild Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding wire. Including all carriages Mechanical transport and Head lode	3029.00	Kgs	100.00	302900.00
12	Providing and fixing of MS main hole cover of 0.75 x 0.75 size fixed with 50x60 MM ISA Including all carriages Mechanical transport and Head lode	4.00	No	3000.00	12000.00

Head Draftsman

contd. On 3rd

Executive Engineer

p-3rd

SUBJECT:- Providing/laying and fitting of GI pipes including Construction of protection works, Intake Chamber near head site, 0.04 lac gallon SR, Sluice Chamber, supporting pillars for RWM at spots, Chain Link fencing around structures, Cattle troughs, for Retrofitting of WSS Banjaran for 100% coverage of FHTCs

13	Centering and shuttering including strutting, propping etc. and removal of form work in: Including all carriages Mechanical transport and Head lode Raft/Bases	144.52	Sqm	290.00	41911.00
13.1	Walls	130.79	Sqm	550.00	71934.00
13.2	Slab	3.89	Sqm	550.00	2139.00
13.3	Ring beam	5.40	Sqm	553.00	2986.00
13.4	Domes	9.42	Sqm	1700.00	16014.00
14	Providing and mixing of water proofing material in cement concrete work in doses by weight of cement as per manufacturer's specifications. Including all carriages Mechanical transport and Head lode	128.39	Kgs	100.00	12839.00
15	12 mm thick cement plaster in 1:4 mix (1 cement :4 coarse sand) . Including all carriages Mechanical transport and Head lode	65.45	Sqm	285.00	18653.00
16	Structural steel work welded in built up sections framed work including cutting hoisting fixing in position and applying a priming cost of steel primer Including all carriages Mechanical transport and Head lode.	655.00	kgs	135.00	88425.00
17	Providing and fixing G.I. chain link fabric fencing of required width in mesh size 50x50 mm including strengthening with 2 mm dia wire or nuts, bolts and washers as required complete (G.I. wire of dia 4 mm) Including all carriages Mechanical transport and Head lode	41.00	Sqm	900.00	36900.00
18	Providing and fixing of nut bolts and chip including one end fix in Anchor Block Including all carriages Mechanical transport and Head lode	56.00	Kgs	100.00	5600.00
19	Dumping stone excluding cost of stone in horizontal on level complete. Including all carriages Mechanical transport and Head lode	61.00	Cum	875.00	53375.00
20	Hand packing stone in wire crates excluding cost of wire and stone Including all carriages Mechanical transport and Head load complete.	50.00	Cum	900.00	45000.00
21	Supply of stones complete. Including all carriages Mechanical transport and Head lode	40.18	Cum	700.00	28126.00
22	Supply of crate mesh complete. Including all carriages Mechanical transport and Head lode	2587.00	Sft	35.00	90545.00
23	Providing/laying of stone soling (GSB) for road restoration complete job.	6.00	Cum	2000.00	12000.00
Rs.53,27,761.00					
(Rupees Fifty Three Lac Twenty Seven Thousand Seven Hundred Sixty One only)					
(Ind. Cost of pipes)					

Head Draftsman

contd. On 4th

Executive Engineer

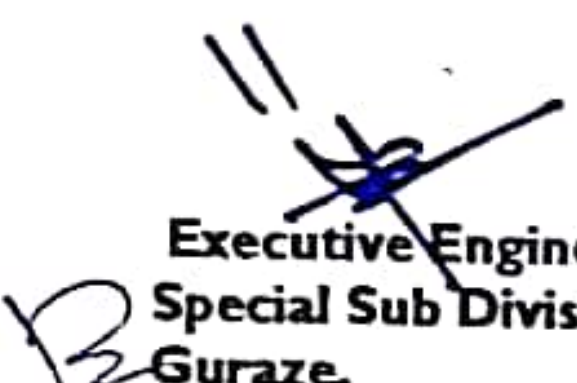
p-4

SUBJECT:- Providing/laying and fixing of GI pipes including Construction of protection works, Intake Chamber near head site, 0.04 lac gallon SR, Sluice Chamber, supporting pillars for RWM at spots, Chain Link fencing around structures, Cattle troughs, for Retrofitting of WSS Banjaran for 100% coverage of FHTCs

TERMS AND CONDITIONS:-

01. This letter of allotment will constitute a legal contract between the government and the contractor and the conditions as laid down in the master e-NIT for 2021-22 and PWD Form No. 25 (Double) will also hold good even before the drawl of an agreement between the Government and the contractor.
02. The contractor has to strictly follow the quality control measures as per relevant IS codes. The sampling of concrete is to be done by the contractor in presence of Jr. Engineer / Site Engineer and to be got tested from the reputed laboratory approved by the J&K Govt. The contractor has to get Hydraulic / structural design of various structures from the reputed consultant duly vetted from the design directorate before the execution of the work is to be started.
03. That the date of start of the work shall be reckoned within Two days from the date of issue of letter of intent and in case of delay on the part of the contractor in execution of the work within stipulated time of completion a penalty upto 10% of contract value shall be imposed upon him.
04. The total amount of work should not exceed 53,27,761.00 in any case.
05. The contractor has deposited an amount of Rs.160000.00 bearing No.3058151 dated 07/08/2021 in shape of earnest money (EM) through J&K Bank Branch Dawar Gurez, which has been retained in the divisional office and shall be released after the successful completion / commissioning of work and after observing DLP period is over.
06. The GI Pipe class LA as per IS 1239 part 1st is to be checked / tested by CEIL/RIET and subsequently by third party fixed by the Chief Engineer.
07. The allotment order No. and name of the executing agency must be mentioned on the pipe bill/inspection note and original copies must be submitted to this Office.
08. The Society of fit certificate must be inspected by CEIL / RIET .
09. The pipe must be dumped and properly stacked dia wise at a proper site as per the consent of Engineer incharge.
10. The payment of the work shall be made as and when the funds are made available by the competent authority under the proper scheme / account head.
11. The Contractor shall attend the divisional office within 03 days after the issue of this allotment order for drawl of the agreement with the department.
12. Nothing shall be paid to the contractor on account of dewatering/ diversion even if involved at site of work.
13. The mileage for carriage of materials by mechanical transport / by manual labour as advertised/ allotted shall be final and nothing shall be allowed beyond allotted.
14. If the Contractor does not start the work within 15 days of issue this allotment order/ letter of intent already issued , the allotment shall be cancelled at the risk & cost of contractor without serving any notice. The Astt. Executive Engineer concerned shall intimate this office regarding the same.


Head Draftsman


Executive Engineer
Special Sub Division
Guraze.

No-ESSDG/ 2302-11

Date: 20/08/2021

Copy to the-

01. Chief Engineer Kashmir Jal Shakti PHE Department Srinagar for favour of information
02. District Development commissioner (chairman JJM Bandipora) for favour of information
03. Superintending Engineer Hydraulic Circle Sla/ Spr H.Q Sopore for favour of information.
04. Technical Officer to Mission Director JJM for favour of information
05. Assistant Executive Engineer (USD) PHE Sub-Division Gurez for information & necessary action.
- 06-08. JAO/Head Assistant/ Head Draftsman Divisional Office for information.
09. Concerned File.