

Jammu & Kashmir

OFFICE OF THE EXECUTIVE ENGINEER PHE DIVISION SOPORE

M/s: Farooq Ahmad Ganai
 S/O: Mohammad Subhan Ganai.
 R/O: Hathishah sopore
 Reg No:190/AYY/CE/CID/PDC/2010-11

No:- 10109-16
 Dated:- 29-12-2023
 Time of Compl.: 30 days

Subject: - Supplying, Fabrication, Erection and Commissioning of Structural Steel Staging including Roofing With RCC foundation etc excluding SMC-GFRP Tanks, for mounting of SMC-GFRP Panel Tanks of different capacities depending on safe bearing capacity, staging height and storage Capacity of various water supply schemes in different Divisions/ Districts of Kashmir province under Jal Jeevan Mission (JJM) Programme.

Ref:

1. Your on-line tender received in response to the E-NIT No: 23 of 2023-24 dated: 26-08-2023 issued under endorsement No: CE/PHE/Kmr/18346-57 dated: 26-08-2023 and up-loaded on tender portal with tender ID from 2023_PHE_227781_1-8.
2. Chief Engineer Kashmir Jal Shakti PHE Department Srinagar's LOA issued under No.CE/PHE/K/E&T/JJM/21570-83 dated: 20-09-2023.
3. This office letter of intent issued under No:JS/PHE/DB/SPR./7526-28 dated: 20-10-2023
4. Superintending Hyd. Circle Sopore's authorization issued vide No: SE/Hyd./DB/10623-34 dated: 29-12-2023.

For and on behalf of Lt. Governor of Jammu and Kashmir Union Territory, contract for the work namely "Supplying, Fabrication, Erection and Commissioning of Structural Steel Staging including Roofing with RCC foundation etc for mounting of SMC-GFRP Tank of 0.25 Lac Gallons/113.65 KL capacity (Excluding SMC-GFRP Panel Tank), depending on safe bearing capacity, Staging height for water supply scheme Nathipora under Jal Jeevan Mission (JJM)" is hereby allotted to you in accordance with the terms and conditions as laid down in the bid document read with any amendment if any for an amount of **Rs.4851529.00 (Rs. Forty Eight Lacs Fifty One Thousand five Hundred and twenty one only)** as per the following item rates along with your quoted overall tender depreciation of **(-5.51)%**.

A Rates:

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
1	Earth work in bulk excavation by mechanical means (hydraulic excavator) over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth lead upto 50 meters and lift upto 1.5 m, as directed by Engineer-in-Charge. (All kinds of soil)	cum	717.75	187.3	134434.57
2	Extra for every additional lift of 1.5 m or part thereof in excavation/banking excavated or stacked material All kinds of soil :	cum	478.5	89.75	42945.37
3	Pumping out water caused by springs, tidal or river seepage, broken water mains or drains and the like	KL	239.25	167.8	40146.15

Head Draftsman

Technical Officer

Exen



Supplying, Fabrication, Erection and Commissioning of Structural Steel Staging including Roofing with RCC foundation of OHT at WSS Nathipora.

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
4	Close timbering in trenches including strutting, shoring and packing cavities (wherever required) complete. (Measurements to be taken of the face area timbered) Depth exceeding 1.5 m but not exceeding 3 m	SQM	99.9	255.2	25494.48
5	Providing and laying hand packed stone soling 50 mm nominal size including filling, spreading, dressing, ramming, all leads lifts and all carriages complete.	cum	8.748	1320	11547.36
6	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 mm nominal size)	CUM	4.374	5202.2	22754.42
7	Providing and laying in position specified grade of reinforced cement concrete including curing but excluding the cost of centering, shuttering, finishing and reinforcement. All works upto plinth level 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	CUM	11.13	7788.4	86684.89
8	Reinforced cement concrete work in beams, suspended floors, roofs having slope upto 15°, landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases upto five level including curing but excluding the cost of centring, shuttering, finishing and reinforcement with:1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	CUM	12.621	9821.85	123961.56
9	Centering and shuttering including strutting, propping etc. and removal of form for:				
9.1	Foundations, footings, bases of columns etc. for mass concrete.	sqm	13.36	286.35	3825.63
9.2	Lintel, beams, plinth beams, girders, bressumers and cantilevers.	sqm	17.22	577.55	9945.41
9.3	Columns, pillars, piers, abutments, posts and struts.	sqm	90.225	742.55	66996.57
10	Steel reinforcement for R.C.C. work ready to use "cut and bend" rebars of approved make from factory/workshop to construction site including placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	kg	2642.68	123.2	325578.17
11	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m.	cum	645.97	218.4	141079.84



Head Draftsman




Technical Officer




Exen

Supplying, Fabrication, Erection and Commissioning of Structural Steel Staging including Roofing with RCC foundation of OHT at WSS Nathipora

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
12	Structural steel work in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete. Reveted and bolted	kg	23260.37	142.9	3323906.87
13	Steel work welded in built up sections/framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works	kg	2582.02	181.6	468894.83
14	Providing and fixing D.I. sluice valves (with cap) complete with bolts, nuts, rubber insertions etc. (the tail pieces if required will be paid separately). Confirming to IS:14846 read with latest amendments with pedestal. 100mm dia. Class 1	EAC H	3	14594	43782.00
15	Providing and fixing hand rail of approved size by welding etc. to steel ladder railing, balcony railing, staircase railing and similar works, including applying priming coat of approved steel primer. M.S. tube 40mm Nominal bore	kg	105.72	161.05	17026.20
16	Providing and fixing of MS flanged joints (12mm thick) to double flanged GI/DI pipes including cutting of pipes, welding charges, cutting of flanges, rubber gasket, bolts, nuts including testing of joint and all sorts of carriages. Complete Job. 100 mm	JOI NT	16	1520	24320.00
17	Supply installation, testing and commissioning of Advanced Maintenance Free environment friendly Earthing system consisting of 1 no. of 3mtr length, 17.2 mm dia UL certified earth electrode made of high tensile low carbon steel circular rods. molecularly bonded copper on outer surface (minimum copper bonding thickness-250 microns) with GI terminals to connect incoming strips, (Environment friendly backfill compound duly certified as per ANSI/NSF standard 60/Toxic content certificate as safe for use near potable ground water resources strictly as per specification enclosed. Make- SHREE ELECTRODES/OBO BETTERMANN/ERICO (2 Nos UPS and 4 Nos Main L.T Panel/2 Nos Fire Fighting Panel) including Earth pit chamber (300mm x 300mm) with CI cover	NO	1	15800	15800.00
18	Providing and Fixing 25 mm x 5 mm Copper Strip in 40 mm dia. G.I Pipe FRL Earth Electrode including with Brassnut, bolt, spring, washer, excavation and refilling etc. as required.	RM	30	1224	36720.00



Head Draftsman



Technical Officer



Exen

Supplying, Fabrication, Erection and Commissioning of Structural Steel Staging including Roofing with RCC foundation of OHT at WSS Nathipora.

S. No	Particulars of Items	Unit	Quantity	Allotted Rate	Amount in Rs.
19	Supply, installation, testing and commissioning of lightening conductor made of 25 mm dia 300 mm long copper tube having single prong at top with base plate.	EAC H	1	1500	1500.00
20	Providing and Mixing of Repidite of approved brand.	Litre	160	78	12480.00
21	Providing and fixing of tail pieces of specified dia of 100mm	NO	6	2500	15000.00
22	Applying priming coat				
22.1	With ready mixed red oxide Zinc Chromate primer of approved brand and manufacture on steel galvanized iron/steel works(first coat)	sqm	412.5	53.6	22110.00
22.2	With ready mixed red oxide Zinc Chromate primer of approved brand and manufacture on steel works(second coat)	sqm	412.5	28.85	11900.62
23	Finishing with Epoxy paint (two or more coats) at all locations prepared and applied as per manufacturer's specifications including appropriate priming coat, preparation of surface, etc complete On steel work	Sqm	412.5	197.8	81592.50
24	Carriage of material from source to site by mechanical transport. Cement and steel for average lead of 15km	MT	32.54	306.18	9963.09
25	Carriage of material from source to site by mechanical transport. Sand for average lead of 20km	CUM	11.305	409.94	4634.37
26	Carriage of material from source to site by mechanical transport. Stone agg.40mm for average lead of 20km	CUM	3.936	445.64	1754.03
27	Carriage of material from source to site by mechanical transport. Stone agg.20mm for average lead of 20km	CUM	18.68	409.94	7657.67
	Total				5134436.00
	Below - 5.51% on all items				282907.00
	Grand Total				4851529.00

Rates and quantities checked:


Head Draughtsman


Technical Officer


Executive Engineer
Jal Shakti PHE Division
Sopore

B Terms and conditions:


01. Total value of the work is **Rs.4851529.00** (Rs. Forty Eight Lacs Fifty One Thousand Five Hundred and Twenty One only) worked out on the basis of above quoted rates which includes all taxes, levies etc and as per the drawing approved vide Chief Engineer Kashmir Jal Shakti PHE Department Srinagar's vide No: **CE/PHE/E&T/JJM/25668-76** dated: **31-10-2023**.

Supplying, Fabrication, Erection and Commissioning of Structural Steel Staging including Roofing with RCC foundation of OHT at WSS Nathipora.

02. The work shall have to be completed by you successfully within a period of **30 days** only failing which penalty under rules shall be imposed upon you.
03. An agreement shall have to be drawn by you with the department within a period of 07 days from the date of issuance of allotment failure to execute such a formal deed shall not however prevent the contract from being enforced upon you. However payment shall not be made unless the agreement is drawn.
04. Performance security equivalent to **3%** of the value of the contract **Rs.145545.00** valid in accordance with bid conditions shall have to be furnished by you in shape of CDR/BG/FDR within a week from the date of issuance of this allotment order or at the time of signing of agreement whichever is earlier.
05. All other terms and conditions shall remain same as laid down in E-NIT/ Standard bidding document/PWD Form No 25 and GFR-2017.


**Assistant Accounts
Officer**


Technical officer

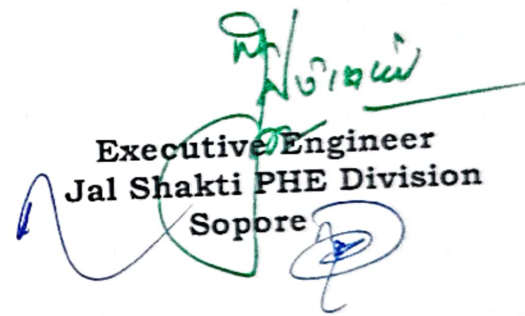
**Executive Engineer
Jal Shakti PHE Division
Sopore**

Copy to the:

01. Mission Director Jal Javeen Mission Civil Secretariat Srinagar for favour of information.
02. Chief Engineer Kashmir Jal Shakti PHE Department Srinagar for favour of information.
03. District Development Commissioner Baramulla (Chairman DJJM) for favour of information.
04. Direction Planning Jal Shakti Civil Secretariat Srinagar for favour of information.
05. Superintending Engineer Hydraulic Circle Baramulla/Bandipora (Member Secretary JJM) for favour of information.
06. Assistant Executive Engineer PHE Sub Division sopore for information and necessary action.
07. M/S WAPCOAS Ltd Corporate office 76-C intuitional area sector 18 Gurgon for information.
08. File Concerned.