

OFFICE OF EXECUTIVE ENGINEER PHE JSD DIVISION HANDWARA

M/S: Firdouse Ahmad Malik
S/O: Gh Nabi Malik
R/o : Mandir Bagh Srinagar
Regd No: 41/AAV/2019 Dtd 20-12-2019
GST No : 01AOKPM320SK2Z7
Cell No.9541753517



No: - PHE/Hand/ 2784-06 Date: 3, 11, 2023

Adv. Cost : - Rs 93.47 Lacs

Allotted Cost:-Rs.8731106.28/-

(Eighty Seven Lakh Thirty One Thousand One Hundred Six and Twenty Eight Paise Only)

Time of Completion 180 days

Sub : Commissioning and Testing of Laying and fitting of Pipes for Water Supply Scheme Kulangam Chogal under JIM.

Ref:- Your tender in response to this office E-NIT No.25 of 2023-24 at S.No.05 issued under this

Office No PHE/Hand/CC/2501-2511 Dated 23-10-2023

2. District Development Commissioner Kupwara's authorization No. DDCK/Plg/JIM/6622-27 Dated. 31-10-2023.

3. Accord No.CE/PHE/DB/JIM/246 of 08/2022 dated 31-08-2023

4. Technical Sanction Order No.CE/PHE/DB/236 of 08/2022 dated 31-08-2022

For and on behalf of Governor of Jammu & Kashmir UT State, contract for the above subjected work, is hereby fixed with you on the negotiated / following rates, terms and conditions which are reproduced as under.

S.No.	Description of Work Items	Qty	Unit	Alloted Rate in Rs	Amount in Rs
1.00	Earth work in excavation by mechanical means (hydraulic excavator) in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed, within a lead of 50 metres: 2.9.1 All kinds of soil :	7052.04	Cum	252.05	1777466.68
2.00	Ordinary rock :	44.35	Cum	470.00	20844.50
3.00	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides andramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed:	1729.75	Cum	436.00	754171.00
4.00	Ordinary rock :	44.35	Cum	841.60	37324.96
5.00	Laying in position centrifugally cast (spun) iron S&S or flanged pipes (excluding cost of pipe)	8212.41	Qtl	245.55	2016557.28
6.00	Providing push-on-joints to Centrifugally (Spun) Cast Iron Pipes or Ductile Iron Pipes including testing of joints and including the cost of rubber gasket.				0.00
7.00	200mm	2131.00	each	213.00	453903.00
8.00	150mm	1344.26	each	144.70	194514.42
9.00	125mm	541.00	each	117.20	63405.20
10.00	100mm	492.00	each	89.70	44132.40
11.00	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m.	6588.90	Cum	198.70	1309214.43
12.00	Laying and fitting of G.I. pipes (all classes) complete excluding cost of pipes, fittings and Earth work.				0.00
13.00	15 mm dia. nominal bore	6000.00	m	20.25	121500.00
14.00	20 mm dia. nominal bore	5000.00	m	20.25	101250.00
15.00	25 mm dia. nominal bore	6000.00	m	30.65	183900.00
16.00	40 mm dia. nominal bore	3500.00	m	40.80	142800.00
17.00	50 mm dia. nominal bore	3000.00	m	40.80	122400.00
18.00	65 mm dia. nominal bore	2200.00	m	73.05	160710.00

Checked By
Head Draftsman

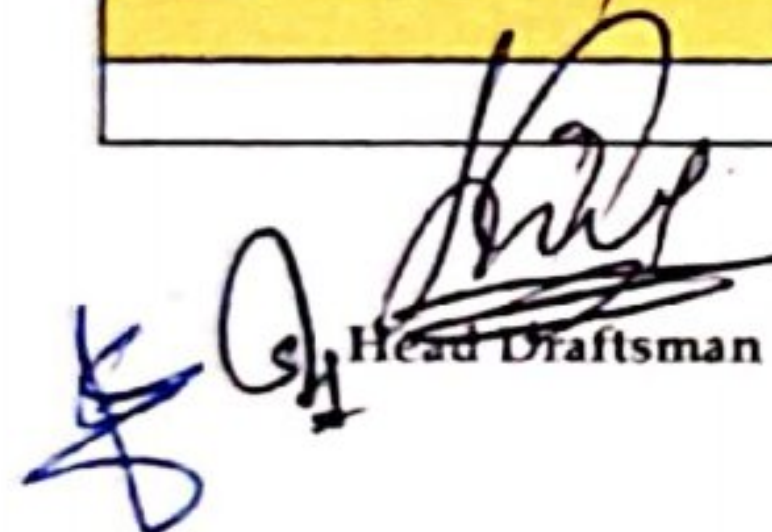
T.O

Kulangam L/F Page No. 1



Scanned with OKEN Scanner

S.No.	Description of Work Items	Qty	Unit	Alloted Rate in Rs	Amount in Rs
19.00	80 mm dia. nominal bore	900.00	m	73.05	
20.00	P/F of MS flanges to GI pipes, incl. c/o nuts, bolts and rubber insertion. The job incl. cutting of threads, laying of pipes and all sorts of carriages (Complete Job).				65745.00 0.00
21.00	100mm dia GI	26.00	Joint	1520.00	39520.00
22.00	80mm dia GI	51.00	Joint	1100.00	56100.00
23.00	Carriage of Pipes from Divisional Store Handwara up to dumping site on road by M T D.I pipes				0.00
24.00	200mm 15km	13000.00	M	17.60	228800.00
25.00	150mm 6km	8200.00	M	10.86	89052.00
26.00	125mm 6km	3300.00	M	8.70	28710.00
27.00	100mm 6km	3000.00	M	6.51	19530.00
28.00	Carriage of Pipes from Divisional Store Handwara up to dumping site on road by M T GI pipes 10km	71.14	MT	217.09	15443.78
29.00	Carriage by manual labour from divisional store to actual site of work for an avg lead 50 mtr G.I pipes	71.14	MT	133.26	9480.12
30.00	Carriage by manual labour from divisional store to actual site of work				0.00
31.00	200mm avg lead 500mtr	13000.00	M	17.67	229710.00
32.00	150mm avg lead 50Mtr	8200.00	M	5.07	41574.00
33.00	125mm avg lead 50Mtr	3300.00	M	4.40	14520.00
34.00	100mm avg lead 50Mtr	3000.00	M	3.60	10800.00
35.00	Provision for pipe speicals as per site requiremnet	1.00	L.S	994000.00	994000.00
Total Amount					9347078.77
Deppreciation @ -6.59% on All items					615972.49
Total Allotted Cost					8731106.28


Head Draftsman


Technical Officer


Executive Engineer
PHE Jal Shakti Division Handwara

Copy to the:-

1. Distt. Superintending Engineer Hydraulic circle Kupwara H/Q Handwara for information.
2. Assistant Executive Engineer PHE Sub-Division Handwara for information
3. M.File

Checked By
Head Draftsman

T.O

Xen

Kulangam L/F Page No. 2



Scanned with OKEN Scanner