

Office of the Executive Engineer (JSD) P.H.E Division Awantipora

E-Mail ID: phedivisionawantipora@gmail.com

M/S MAS Construction
R/O: Mominabad Anantnag
Regd.No.466/AAY/CE/KCC/PDC/2001-2002
PAN No. AAPFM4542G
GST No. 01AAPFM4542G1ZG
Contact No. 9622501011

No.PHE/AWP/ 2539-44
Dated:- 29-10-2024

Subject:- Supply and fixing installation including succesful testing and commissioning alongwith trial run for a period of three 03 months GRP Hot Compressed Moulding SMC Sheet Moulding Compound tank for 0.40 Lac Gallons OHT on Turnkey Basis EPC Mode for WSS Leihpora "B"

Reference:- (1). Your tender in response to E-NIT No. 07 of 2024-25 issued under endorsement No. CE/PHEK/JJM/9342-62 dated:- 09.07.2024, Tender Id No. 2024_PHE_252608_1-18.
(2). Administrative Approval accorded by Superintending Engineer HydI Circle Pulwama H.Q Shopian's order No. SE/Hyd/Spn/DB/129 of 01/2023-24 dated:- 01.01.2024 and endorsement No. SE/Hyd/Spn/DB/6187-88 dated:- 01.01.2024.
(4). Technical Sanction Order No.CE/PHE/DB/989 of 01/2024 dated:- 05.01.2024.
(5). Letter of Acceptance vide Chief Engineer Kmr, Jal Shakti (PHE) Deptt. Srinagar's No.CE/PHE/K/JJM/11248-64 dt: 23.07.2024
(6). DJJM Meeting held on 11.10.2024 vide No. SE/Hyd/Spn/DB/2570-83 dated:- 11.10.2024
For on behalf of lieutenant Governor of Union Territory of Jammu & Kashmir, contract for above mentioned work is hereby fixed with you at the following quoted rates, terms conditions .

Advertised Cost:-Rs 24.334 lacs

Alloted Cost:- Rs 21.633 lacs

(Rupees Twenty One lacs Sixty Three Thousand & Three Hundred) only

S.No.	Particulars of Items	Unit	Qty	Estt. Rate	Amount	
					In figures	In Words
1.00	Supply and fixing/installation including succesful testing and commissioning alongwith trial run for a period of three (03) months GRP Hot Compressed Moulding SMC (Sheet Moulding Compound) tanks with certificate as per ISI Specifications and in accordance with (IS: 14399 -1996 Part I & II). In addition to the storage capacity, the tank should have a free board of minimum 150mm. The tank shall be assembled/constructed using GRP/SMC panel of 1 m x 1 m, 1 m x 2 m or 1m x 0.5m panel as per site requirement. The Dimensions of the tank shall be chosen as per site requirement/design/drawing of the steel staging/platform. The roof of the tank should have panel of size 1m x 1m or as per site requirement, one manhole should be provided on the roof of the tank with double lip construction and proper locking arrangement. The panel should withstand Hydro Static Pressure of at least 4 times the working load and should be provided with HUG nut bolts/washers; Rubber foam gasket cover washer, cleats, including air vents, necessary support system of appropriate size for the roof top panels. The tank shall be constructed as per manufacturer's instructions and met all ISI standards. All M.S. Parts inside/outside should be painted with anti-corrosive paint to avoid rust. The tank should have ladders inside and outside, provision of inlet / outlet / overflow / drain etc. complete job. The rates include all Freight, lead, lift to any distance as a loading, unloading, all taxes (GST), charges, all L&M, T&P as a complete job. Nothing extra will be paid whatsoever the case may be.					
1.10	Storage Capcity 181.60 KL (40000 Gallon)	1	Complete Job	2433440.00	2433440.00	Rupees twenty four lacs thirty three thousand four hundred and forty Only
	Total:-				2433440.00	
			Less(-)	11.10%	270111.84	
	G.Total:-				2163328.16	
	Say:-				21.633lacs	

! Rates and quantity checked

Head Draftsman

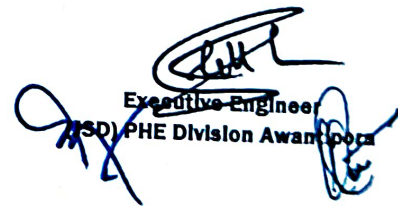
Xen

Subject:- Supply and fixing installation including succesful testing and commissioning alongwith trial run for a period of three 03 months GRP Hot Compressed Moulding SMC Sheet Moulding Compound tank for 0.40 Lac Gallons OHT on Turnkey Basis EPC Mode for WSS Lethpora "B" under (JJM)

Terms Conditions:-

- 1 The cost of work in no case exceed beyond Rs 21.633 lacs (Rupees Twenty One lacs Sixty Three Thousand and Three hundred only)
- 2 Earnest Money @ 2% plugged to Chief Engineer Kmr, Jal Shakti (PHE) Deptt. Srinagar vide FDR with Cust ID : 291410971 Dated:-03.07.2024 (HDFC Bank Qazigund) for an amount of Rs 48,668/- and Additional Security 5% Bank Guarantee vide No. 04361FBG2410002 dated:- 15.10.2024 for an amount of Rs 1,08,166/- are being retained as security deposit shall be released only after successful completion of the work .
- 3 Time of completion is essence of the contract.
- 4 The work shall have to be started by you at site immediately and ensure its successful completion within a period of (30 days) as mentioned in e-NIT from the date of issuance of LOI/Allotment from this office strictly in accordance with the approved proposals falling which the work shall have to be got executed through any other means at your risk and cost, besides CDR deposited by you as security against this contract shall be recommended for forfeiting.
- 5 The Security Deposit of the subjected work shall be released after the DLP Period is over i.e (18 Months).
- 6 The contractors are directed to get the 3rd party inspection of pipe material (HDPE) done preferably from M/S Tata Consultancy or M/S Crown Agents India apart from third party inspection agencies already notified in their respective eNITs. (ADVISORY NO: CE/JSD/PS/35727-60 Dated: 20-01-2024)
- 7 An agreement shall have to be drawn up by you with the department within a period of 07 days from the date of issuance of allotment failure to execute such a formal deed shall not however prevent the contract from being enforced upon you.
- 8 The allotted works shall be subject to check by the third party monitoring agency appointed by the department.
- 9 Payment shall be released as per actual / measured work done not less than 20% of the allotted cost on a monthly basis
- 10 The firm shall be bound for satisfactory performance of works for 18 months after the successful commissioning of the works . If during warranty period any malfunctioning / defects arise, you shall have to rectify same within a period of 10 days of receipt of intimation . In case of any failure on your part, the department may get the defects removed / repaired by any other means and cost thereof shall be recovered from you and shall be recommended for further punitive action as governed under the relevant clause of the contract including black listing.
- 11 Pre & post Geo-tagged photographic evidence be taken during the execution of the work and shall have to be produced at the time of submission of the bill.
- 12 The quantity allotted shall have to be executed on ground strictly as per the estimates that have been framed in the DPR for the item of " OHT on Turnkey Basis EPC Mode ".
- 13 All other terms and conditions shall be applicable as laid down in standard bid document and PWD from No. 25/33.
- 14 Any rules / terms and conditions if not stipulated in the bidding documents , shall be strictly dealt in accordance with the relevant rules / guidelines stipulated in General Financial Rules (GFR-2017) and manual for procurement of works 2019 G.O.I.


Head Draftsman


Executive Engineer
(SD) PHE Division Awantipora

Copy to the:-

- 1) Chief Engineer PHE Kashmir Jal Shakti Department, Kashmir Srinagar for information.
- 2) Superintending Engineer Hydraulic Circle Pulwama H.Q Shopian for information.
- 3) Assistant Executive Engineer Sub Division Pampore for information necessary action. He will ensure the completion of work within the stipulated period strictly in accordance with approved proposals within allotted amount shall in no case exceed the allotted amount.
- 4) Assistant Accounts Officer PHE Division Awantipora for information
- 5) H/D Divisional Drawing Branch for information
- 6) Office File