

Office of the Executive Engineer Spl Sub Div Tangdar

Email Address: xensstdr@gmail.com

Mr. Bagh Hussain Shah
S/o. Kh. Maskeen Shah
R/o : Chamkote Kurnah
Reg No:CE(RandB)/K/03/A class /Civil/2008-09
GSTIN:01BCXPS1075D1ZK
Mob No:8899857303

No: 2631-41
Dated: 4-8-2023

Subject: const of crate protection, RCC Intake channel, Gang hut at Shamespora For WSS Shamespora Gabra Gundghujran JJM

Ref: 1. efile No CEPHEK-ADM/12/2023-06-CEPHEK[7129511]
 2. Technically vetting conveyed by Development Commissioner (Works) PW(R&B) Department on e file CEPHEK-ADM/12/2023-06-CEPHEK[7129511]
 3. Administrative Approval Accorded by Govt vide order No : 51-JK(JSD) of 2023 dated:10.03.2023 issued under endorsement No:JSD-PS/8/2022-Plg-JSD DATED:10.03.2023..
 4. Technical Sanction accorded vide Chief Engineer Jal Sahkti (PHE) Department Kashmir order No TS order No CE/PHE/DB/898 of 03.2023 dtd: 11.03.2023. Endt. No: CE/PHE/DB/46104-11 dtd:11.03.2023.
 5. Revised District Action plan DAP approved by the Concerned Chairman DJJM circulated vide No DDCK/Plg/JJM/4465-85 dtd:14.07.2022.
 6. Govt order No 19-JK(JSD) of 2022 dated:04.02.2022.
 7. Amendment in Operation Guidelines for the implementation of Jal Jeevan Mission issued by JJM DDWS&S Ministry of Jal Shakti Govt vide F.No. W-11016/10/2022-JJM-iv-DDWS dated 21st June 2022.
 8. This office 3rd Fresh E-NIT No. 42 of 2023-24, Dated:24.06.2023, issued under endt. No:1208-18 Dated:24.06.2023.
 9. Your tender received in response to this office E-NIT No. 42 of 2023-24
 10. District Development Commissioner Kupwara's Authorization No:DDCK/PLG/JJM/3292-3314 Dated:26.07.2023.

Adv. Cost: 113.42Lacs
Allotted Cost: 122.49 lacs

For and on behalf of Lt. Governor of Union Territory of Jammu & Kashmir, the above noted work is hereby allotted to you on following negotiated rates which are 8% above on advertised rates

| S.No | Particulars of Items | Unit | Qty | Estimated Rate | Allotted Rate 8% | Amount |
|------|---|------|--------|----------------|------------------|--------|
| 1 | Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed in:-All kinds of Soil | Cum | 656.27 | 436.00 | 470.88 | 309024 |
| 2 | Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed in:-Ordinary Rock | Cum | 651.18 | 841.60 | 908.93 | 591876 |
| 3 | Earth work in excavation by mechanical means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed in all kinds of Soil | Cum | 177.18 | 188.75 | 203.85 | 36118 |

6/1

| | | | | | | |
|----|---|-----|----------|----------|-----------|---------|
| 1 | Ordinary Rock | | | | | |
| 3 | Hand packing stones in wire crates excluding cost of stones and crates | Cum | 118.12 | 378.35 | 408.62 | 48266 |
| 6 | Supply of Second class quarry stones including all carriage up to site of work complete job | Cum | 1128.38 | 337.45 | 364.45 | 411234 |
| 7 | Supply of wire crates including all carriages upto actual site of work Gabion crate | Cum | 846.28 | 2000.00 | 2160.00 | 1827965 |
| 8 | Providing and laying dry stone soling hand packed tightly including cost of 50-200mm nallah boulders | Sqm | 11275.00 | 200.00 | 216.00 | 2435400 |
| 9 | Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:4:8 mix (1 Cement: 4 Course Sand : 8 graded crushed stone agg 40mm nominal size) | Cum | 44.27 | 678.04 | 732.28 | 32418 |
| 10 | Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:3:6 mix (1 Cement: 3 Course Sand : 6 graded crushed stone agg 20mm nominal size) | Cum | 25.76 | 4861.84 | 5250.79 | 135260 |
| 11 | Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:2:4 mix (1 Cement: 2 Course Sand : 4 graded crushed stone agg 20mm nominal size) | Cum | 27.14 | 5399.02 | 5830.94 | 158252 |
| 12 | Providing and laying in position Reinforced cement concrete of specified grade including curing but excluding the cost of centring and shuttering. All work upto plinth level with: 1:1.5:3 mix (1 Cement: 3 Course Sand : 3 graded crushed stone agg 20mm nominal size) | Cum | 8.15 | 6465.20 | 6982.42 | 56907 |
| 13 | Reinforced cement concrete work in walls (any thickness) including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts upto floor five level including curing but excluding cost of centering shuttering, finishing and reinforcement. 1:1.5:3 mix. | Cum | 45.00 | 7801.00 | 8425.08 | 379129 |
| 14 | Brick work with common burnt clay (non-modular) bricks of class designation 7.5 in foundation and plinth including curing in : | Cum | 67.50 | 9408.13 | 10160.78 | 685853 |
| 15 | Extra for brick work with common burnt clay bricks/cement concrete bricks in superstructure above plinth level upto floor five level | Cum | 20.30 | 7420.50 | 8014.14 | 162687 |
| 16 | Reinforced cement concrete work in suspended floors, roofs having slope upto 15°, beams etc upto floor five level including curing but excluding the cost of centering, shuttering finishing and reinforcement with: 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size) | Cum | 13.62 | 1588.38 | 1715.45 | 34824 |
| 17 | Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia and length (hold fast lugs or with dash fasteners shall be paid for separately): First class deodar wood | Cum | 0.72 | 9849.35 | 10637.30 | 144880 |
| 18 | Providing and fixing panelled or panelling and glazed shutters for doors, windows and clerestory windows fixing with butt hinges of required size with necessary screws, excluding panelling which will be paid for separately, all complete as per direction of Engineer-in-charge. (Note: -Butt hinges and necessary screws shall be paid separately) First class kail wood. 30mm thick | Sqm | 0.20 | 162071.5 | 175037.22 | 126027 |
| 19 | Providing and fixing panelling for paned and glazed shutters pre laminated particle board with decorative lamination on both sides Grade I, Type II IS:14587 | Sqm | 3.84 | 3340.92 | 3608.19 | 23092 |
| | | | | | | 13855 |

Providing and fixing Glazed shutters for windows and
clearstory windows 35mm thick 1st class kail wood

| | | | | | | |
|----|---|------|----------|---------|---------|---------|
| 21 | Providing and fixing Fixtures of doors windows a) Hold fasts | Sqm | 10.20 | 4098.65 | 4426.54 | 45151 |
| 22 | b) 125mm Handle Aluminium | No | 52.00 | 163.05 | 176.09 | 9157 |
| 23 | c) Slide Door Bolts | No | 8.00 | 72.98 | 78.82 | 631 |
| 24 | d) Tower Bolts 150mm | No | 4.00 | 321 | 346.68 | 1387 |
| 25 | e) Tower Bolts 100mm | No | 8.00 | 88.38 | 95.45 | 764 |
| 26 | d) Hasp and staples 90mm | No | 44.00 | 63.08 | 68.13 | 2998 |
| 27 | Providing and fixing wire gauze shutters using galvanized M.S. wire gauze of average width for aperture 1.4 mm in both directions with wire of dia. 0.63 mm for doors, windows and clerestory windows with ISI marked M.S. pressed butt hinges bright finished of required size with necessary screws as per direction of Engineer-in-charge : First class kail wood. 30mm thick. | Sqm | 12.00 | 4099.62 | 4427.59 | 53131 |
| 28 | Providing and fixing M.S. grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc including priming coat with approved steel primer all complete. Fixed to openings / wooden frames with rawl plugs screws etc | kg | 153.00 | 215.88 | 233.15 | 35672 |
| 29 | Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level | Kg | 19075.00 | 87.18 | 94.15 | 1795995 |
| 30 | Cement concrete flooring 1:2:4 (1cement: 2 coarse sand: 4 graded stone aggregate) finished with a floating coat of neat cement including cement slurry and curing complete, but excluding the cost of nosing of steps etc. complete 50mm thick | Sqm | 36.20 | 505.00 | 545.40 | 19743 |
| 31 | 15mm Cement plaster on the rough side of single or half brick wall of mix:1 : 4 (1 cement : 4 fine sand) | Sqm | 110.00 | 300.45 | 324.49 | 35693 |
| 32 | 12 mm thick Cement plaster 1 : 3 (1 cement : 3 coarse sand) finished with a floating coat of neat cement | Sqm | 538.05 | 378.12 | 408.37 | 219723 |
| 33 | Applying Priming Coat With ready mixed pink or grey primer of approved brand and manufacture on wood work (hard and soft wood) | Sqm | 40.44 | 71.40 | 77.11 | 3118 |
| 34 | Providing and applying white cement based putty of specified thickness of approved brand and manufacture over the plastered wall surface to prapere the wall surface even and smooth complete 1mm thick. | SqM. | 160.55 | 155.40 | 167.83 | 26945 |
| 35 | Painting with synthetic enamel paint of approved brand and manufacture to give an even shade. Two or more coats on new work | SqM | 40.44 | 146.34 | 158.05 | 6391 |
| 36 | Painting with aluminium paint of approved brand and manufacture to give an even shade. Two or more coats on new work | Sq.M | 10.20 | 143.28 | 154.74 | 1578 |
| 37 | Finishing walls with with water proofing cement paint of required shade on new work | Sq.M | 70.80 | 110.16 | 118.97 | 8423 |
| 38 | P/F chromium plated brass curtain rod having wall thickness of 1.25mm with two chromium plated brass brackets | RM | 13.20 | 486.25 | 525.15 | 6932 |
| 39 | P/F bolts including nuts and washers in RCC slab | Kg | 30.00 | 125.05 | 135.05 | 4052 |
| 40 | Supply and filling of Nallah Muck including levelling, watering dressing and compacting in plinth including all carriages | Cum | 21.50 | 800.00 | 864.00 | 18576 |
| 41 | Making plinth protection 50mm thick of cement concrete 1:3:6 over 75mm bed of dry brick blast 40mm nominal size including finishing the top smooth and curing complete | Sq.M | 20.25 | 594.78 | 642.36 | 13008 |
| 42 | Structural Steel Work in built up sections, trusses and framed work including cutting, hoisting fixing in position and applying priming coat. Welded | Kg | 150.00 | 102.13 | 110.30 | 16545 |

| | | | | | | |
|----|---|-----|--------|---------|---------|--------|
| 44 | Providing coloured tile profile corrugated GS sheet roofing fixed with polymer GRL hooks bolts and nuts all carriages Complet | Sqm | 150.00 | 1600.00 | 1728.00 | 259200 |
| 45 | Providing ridges or hips of overall width 600mm with colour profile shhets fixed with polymer GRL hookjs incld. All carriages | RM | 150.00 | 1000.00 | 1080.00 | 162000 |
| 46 | Providing and fixing 1mm thick PGI sheet for soft boarding incld. Necessary angle iron braces fixede with truss and screw, nuts, bolts, washers etc incld. All carriages | Sqm | 150.00 | 800.00 | 864.00 | 129600 |
| 47 | Providing and fixing 1st quality ceramic glazed floor tiles conforming to IS : 15622 (thickness to be specified by the manufacturer) of approved make in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge in skirting, risers of steps and dados over 12 mm thick bed of cement Mortar 1:3 (1 cement: 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm including pointing in white cement mixed with pigment of matching shade complet | Sqm | 3.78 | 1262.7 | 1363.72 | 5155 |
| 48 | Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS : 15622 of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer- in-Charge, in skirting, risers of steps and dados over 12 mm thick bed of cement mortar 1:3 complete. | Sqm | 13.38 | 1393.26 | 1504.72 | 20133 |
| 49 | Suspended Floors | Sqm | 526.08 | 262.30 | 283.28 | 149030 |
| 50 | Plinth beram | Sqm | 50.55 | 731.00 | 789.48 | 39908 |
| 51 | Edges of slabs and breaks in floors upto 200mm thick. | RM | 30.00 | 553.00 | 597.24 | 17917 |
| 52 | Providing and fixing Polyethylene- Aluminum- Polyethylene (PE-ALPE) Composite Pressure Pipes conforming to IS: 15450, U.V. stabilized with carbon black having thermal stability for hot and cold water supply, capable to withstand temperature upto 80°C, Including all special fittings of composite material (engineering plastic blend and brass inserts wherever required) e.g. Elbows, tees, reducers, couplers and connectors etc. This includes testing of joints complete as per direction of the Engineer-in-charge: Internal work-exposed on wall with clamps at 1.00 meter spacing 1620 (20mm OD) pipe | RM | 18.00 | 321.25 | 346.95 | 6245 |
| 53 | 2025 (25mm OD) pipe | RM | 18.00 | 385.50 | 416.34 | 7494 |
| 54 | Providing and fixing PPR Unions PPR Union 20mm | NO | 5.00 | 259.70 | 280.48 | 1402 |
| 55 | PPR Union 25mm | NO | 5.00 | 309.20 | 333.94 | 1670 |
| 56 | Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot and cold water supply, including all CPVC plain and brass threaded fittings. This includes jointing of pipes and fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer-in-charge. External work including trenching, refilling etc. 100mm nominal outer dia pipe | RM | 20.00 | 268.00 | 289.44 | 5789 |
| 57 | Providing and fixing water closet Squatting Pan (Indian Type WC Pan) with 100mm sand cast iron P or S Trap, 10 ltr capacity Low Level White PVC Flushing Cistern including flush pipe of approved make with manually controlled device (Hanadle lever) confirming to IS: 7231 with all fittings and fixtures complete including cutting and making good the walls and floors wherever required. White vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests | NO | 2.00 | 5534.85 | 5977.64 | 11955 |

| | | | | | | |
|----|---|-----|---------|---------|---------|-------|
| 59 | Providing and fixing Stainless Steel A ISI 304 (18/8) kitchen sink as per I.S. 13983 with C.I. brackets and stainless steel plug 40 mm, including painting of fittings and brackets, cutting and making good the walls wherever required : Kitchen sink without drain board 610x510mm bowl depth 200mm | NO | 2.00 | 4575.20 | 4941.22 | 9882 |
| 60 | Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C waste fittings complete: Semi rigid pipe 32 mm dia | NO | 2.00 | 131.15 | 141.64 | 283 |
| 61 | Providing and fixing 15 mm nominal bore C.P. brass bib cock of approved quality conforming to IS : 8931 | NO | 6.00 | 83.25 | 89.91 | 539 |
| 62 | Providing and fixing 15mm nominal bore CP Brass close hole Basin Mixer of approved quality and make weighing not less than 1.97 Kg | NO | 6.00 | 84.25 | 90.99 | 546 |
| 63 | Providing and fixing 15 mm nominal bore C.P. brass angle valve for basin mixer and geyser points of approved make conforming to IS : 8931 | NO | 4.00 | 657.30 | 709.88 | 2840 |
| 64 | Providing and fixing brass stop cock of approved quality, 15 mm nominal bore | NO | 6.00 | 2207.60 | 2384.21 | 14305 |
| 65 | Providing and fixing 15 mm nominal bore C.P. brass angle valve for basin mixer and geyser points of approved make conforming to IS : 8931 | NO | 4.00 | 657.30 | 709.88 | 2840 |
| 66 | Providing and fixing C.P. Brass extension nipple (size 15mmx50mm) of approved make and quality as per direction of Engineer-in-charge | NO | 30.00 | 69.85 | 75.44 | 2263 |
| 67 | Providing and fixing 15 mm nominal bore C.P. brass long nose bib cock of approved quality conforming to IS standards and weighing not less than 810 gms. | NO | 6.00 | 624.65 | 674.62 | 4048 |
| 68 | Providing and fixing ball valve of appreved quality complete. 15mm nominal bor | NO | 2.00 | 438.85 | 473.96 | 948 |
| 69 | Providing and fixing PTMT towel rail complete with brackets fixed to wooden cleats with CP brass screws with concealed fitting arrangement of approved quality and colour: 450 mm long towel rail with total length of 495 mm, 78 mm wide and effective height of 88 mm, weighing not less than 170 gms | NO | 1.00 | 686.15 | 741.04 | 741 |
| 70 | Providing and fixing PTMT shelf 440 mm long, 124 mm width and 36 mm height of approved quality and colour, weighing not less than 300 gms. | NO | 1.00 | 790.50 | 853.74 | 854 |
| 71 | Providing and fixing G.I. pipes complete with G.I. fittings and clamps, including cutting and making good the walls etc.: 15mm Dia nominal bore | RM | 20.00 | 431.10 | 465.59 | 9312 |
| 72 | 20mm dia nominal bore | RM | 15.00 | 476.60 | 514.73 | 7721 |
| 73 | Providing and fixing G.I. pipes complete with G.I. fittings and clamps, excluding trenching and redfilling (External Work) :15mm Dia nominal bore | RM | 36.00 | 163.55 | 176.63 | 6359 |
| 74 | Providing and placing on terrace (at all floor levels) polyethylene water storage tank ISI : 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank | Ltr | 1000.00 | 11.25 | 12.15 | 12150 |

E Xer

| | | | | | | |
|----|--|-----|-------|---------|---------|-------|
| 76 | Constructing masonry Chamber 30x30x50 cm inside, in brick work in cement mortar 1:4 (1cement :4 coarse sand), with C.I. surface box 100x100x75 mm (inside) with hinged cover fixed in cement concrete slab 1:1.5:3 mix (1 cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size) including necessary excavation, foundation concrete 1:5:10 (1 cement :5 fine sand : 10 graded stone aggregate 40 mm nominal size) and inside plastering with cement mortar 1:3 (1 cement : 3 coarse sand) 12 mm thick, finished with a floating coat of neat cement complete as per standard design. With common burnt clay (non modular) bricks of class designation 7.5 | No | 4.00 | 1735.00 | 1873.80 | 7495 |
| 77 | Providing and fixing PVC Soil waste and vent pipe of reputed make incld earth eork and refilling. 100mm dia 75mm dia | RM | 4.00 | 300.00 | 324.00 | 1296 |
| 78 | Providing and fixing C.I manhole Cover 0.30 x 0.30m size | NO | 21.00 | 250.00 | 270.00 | 5670 |
| 79 | Providing and fixing PVC Door Fittings complete. 100mm floor trap | NO | 4.00 | 1500.00 | 1620.00 | 6480 |
| 80 | 100mm door junction | NO | 2.00 | 500.00 | 540.00 | 1080 |
| 81 | 100mm Collar | NO | 2.00 | 350.00 | 378.00 | 756 |
| 82 | 100mm bends | NO | 8.00 | 175.00 | 189.00 | 1512 |
| 83 | 80mm Door Junction | NO | 10.00 | 250.00 | 270.00 | 2700 |
| 84 | 80mm floor trap | NO | 4.00 | 300.00 | 324.00 | 1296 |
| 85 | 80mm bend | NO | 4.00 | 250.00 | 270.00 | 1080 |
| 86 | 80mm Collar | NO | 12.00 | 200.00 | 216.00 | 2592 |
| 87 | Floor Grating | NO | 8.00 | 150.00 | 162.00 | 1296 |
| 88 | Floor Grating | NO | 6.00 | 250.00 | 270.00 | 1620 |
| 89 | P/F of Indian type WC of approved brand and make along with cistern including the cost of P Trap and other accessories required while fixing at the site of work, complete job | No | 1.00 | 8000.00 | 8640.00 | 8640 |
| 90 | Providing and fixing M.S expanded metal mesh of 20mm x 20mm size and 1.6mm thick for gable opening duly fixed on angle frame by electrowelding including applying of approved brand priming coat etc complete job. | Sqm | 7.98 | 150.00 | 162.00 | 1293 |
| 91 | Providing lighting points: Using wire of 1.5 sqmm, copper conductor, Multi stranded , to be laid in conduites including PVC Conduit pipe of reputed make including chasing of walls and making good the same Testing / Commissioning for all points upto 6 Amp) including P/F 5 A Switches, Indicators, MCB's and all connected items etc complete | No | 18.00 | 1200.00 | 1296.00 | 23328 |
| 92 | Providing Heating Points: Upto 16 Amp using 4.00 Sqmm multistranded copper wire, but 2.5 sqmm cable for earth in green colour to be connected for all the required points/ sources including providing 16 Amp Switches, indicators PVC Conduit pipe of reputed make including chasing of walls and making good the same and all connected items etc complete | No | 8.00 | 2000.00 | 2160.00 | 17280 |
| 93 | Providing and fixing 1200mm sweep ceiling fan complete with all accessories, including dimmer of ISI mark complete. | No | 2.00 | 2000.00 | 2160.00 | 4320 |
| 94 | Providing and fixing of exhaust fan in 1.5 sqmm stranded wire to be laid in conduit incld providing and fixing of Exhaust fan, Conduit Pipes, Suitable switches complete. | No | 4.00 | 2000.00 | 2160.00 | 8640 |
| 95 | Providing and fixing MCB distribution box 10way main double door system complete | No | 2.00 | 5000.00 | 5400.00 | 10800 |
| 96 | Providing and fixing 16Amp MCB of approved make complete | No | 10.00 | 700.00 | 756.00 | 7560 |
| | Supply and fixing of LED Bulbs of Superior/ approved quality 12W (220-240V) with frequency 50 Hz . | No | 14.00 | 500.00 | 540.00 | 7560 |

| | | | | | | |
|-----|--|-----|---------|----------|----------|----------------|
| 98 | Supply and fixing of Hot Water Gysers 50 Ltr Capacity including all accessories testing and commissioning complete of Superior/ approved make. | No | 2.00 | 18000.00 | 19440.00 | 38880 |
| 98 | Carriage of materials from Source upto Road Site of work by Mechanical Transport. a) Stones b) Wire crates avg 15Km | Cum | 856.80 | 401.83 | 433.98 | 371831 |
| 100 | Carriage of stones by manual labour avg 300m a) Stones b) Wire crates avg 80Km | MT | 10.45 | 2663.23 | 2876.29 | 30057 |
| 101 | Carriage of materials from Source upto Road Site of work by Mechanical Transport. Cement and Steel 5 Km's a) Stones b) Wire crates avg 80Km | Cum | 846.28 | 515.75 | 557.01 | 471386 |
| 102 | Carriage of materials from Source upto Road Site of work by Mechanical Transport. Cement and Steel 5 Km's a) Stones b) Wire crates avg 80Km | MT | 10.45 | 228.58 | 246.87 | 2580 |
| 103 | Sand and 20mm aggregate 15 Km | MT | 67.52 | 183.35 | 198.02 | 13370 |
| 104 | 40mm nominal size Aggregate 15 Km's | Cum | 165.04 | 341.57 | 368.90 | 60883 |
| 105 | Sand and 20mm aggregate 15 Km | Cum | 16.95 | 371.28 | 400.98 | 6797 |
| 106 | Bricks from Budgam 225Km | Cum | 240.31 | 341.57 | 368.90 | 88649 |
| 107 | Carriage of materials from road site upto actual site of work by manual means (Head Load) avg 500 mtrs including loading unloading and stacking complete. Cement | No | 4874.00 | 11.14 | 12.03 | 58640 |
| 108 | Steel | MT | 50.65 | 355.69 | 384.15 | 19457 |
| 109 | Sand and 20mm Crushed agg | MT | 16.87 | 605.95 | 654.43 | 11040 |
| 110 | 40mm crushed aggregate | Cum | 165.04 | 246.84 | 266.59 | 43998 |
| 111 | Carriage of materials from road site upto actual site of work by manual means (Head Load) avg 300 mtrs including loading unloading and stacking complete. Cement | Cum | 16.95 | 246.84 | 266.59 | 4519 |
| 112 | Stones / Soling | MT | 21.91 | 265.71 | 286.97 | 6287 |
| 113 | Sand and 20mm Crushed agg | Cum | 10.52 | 515.75 | 557.01 | 5860 |
| 114 | Bricks | No | 4875.00 | 1.61 | 1.74 | 8477 |
| | | | | | | Total 12248992 |

Rupees one crore twenty two lacs forty eight thousand nine hundred and ninety two only

TERMS & CONDITIONS:

- 1 The contractor shall draw agreement with the Executive Engineer Spt Sub Div. Tangdar within a period of 07 days from the date of issue of allotment order and failing to execute such an agreement in time shall not however prevent this contract being enforced against the contractor and the conditions laid down in the SBD shall hold good even before drawal of formal agreement.
- 2 The work shall have to be executed strictly in accordance with the approved proposals and specifications of the sanctioned estimates
- 3 The date of start of work shall be reckoned from the date of issuance of allotment order subject to the working weather conditions
- 4 It shall be mandatory for the executing agency / contractor to ensure safe and adequate supply of electricity required for all the workmen skilled / unskilled deployed at site of work.
- 5 Suitable arrangement for supply of potable water at site of work for all the workmen skilled/unskilled be made by
- 6 Arrangement for sufficient sanitation facility at site be ensured by the executing agency / contractor for all the workmen to be mobilized at site besides, separate toilet facilities be provided for female workers at the site of work
- 7 Performance security equivalent to 03% of the value of the contract i.e. Rs. 340260 valid in accordance with bid condition shall have to be furnished by you in shape of CDR/FDR/Bank Guarantee within one week of the date of issuance of allotment order or at the time of signing of agreement whichever is earlier.
- 8 Insurance cover as admissible under rules shall be provided to all workers / skilled / unskilled deployed at site and the necessary premiums shall be borne by the executing agency / contractor itself.
- 9 Payment are subject to the recommendations of the third party verification agency (M/S WAPCOS Ltd) or any other agency engaging by the Govt for the purpose.

TIME OF COMPLETION

The work shall be completed within a period of (90 working Days) after the date of issue of allotment. In the event of the contractor failing / declining /neglecting /causing delay in the execution of the work, penalty to the extent of 10% of the allotted amount shall be imposed on the contractor and the work shall be got executed departmentally or through any other agency at the risk and extra cost of the contractor, besides action under rules for black listing of the contractor shall be taken up by the department.

EARNEST MONEY :

The BG /FDR /CDR bearing No: 641990 for Rs. 340260/ dtd: 18.07.2023 from JKB Tangdar pleged to Executive Engineer Spl Sub Division Tangdar shall be retained in this office till successful completion of the above mentioned work after the expiry of the Defective Liability Period (D.L.P)

ADVANCE PAYMENT :

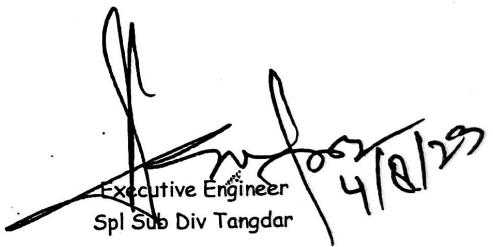
No mobilization advance or advance payment shall be made to the allottee (Contractor)

GENERAL :

All other terms and conditions as laid down in the E-NIT No.42 of 2023-24, dt 24.06.2023, issued under endstt. No. 1208-18 Dt. 24.06.2023, from this office shall be binding on the contractor.


Head Drafts man


T.O.


Executive Engineer
Spl Sub Div Tangdar
4/8/23

Copy to the:-

1. Chief Engineer Kmr PHE Department Srinagar for information.
2. District Development Commissioner Kupwara (Chairman DJJM Kupwara) for favour of information.
3. District Superintending Engineer Hydraulic Circle Kupwara HQ- Kupwara (Secretary DJJM Kupwara) for favour of information
4. Technical officer to Chief Engineer JSD (PHE) Kashmir for favour of information to Chief Engineer.
5. Team Leader WAPCOS Kupwara for information & necessary action.
6. AEE PHE Sub-Division Tangdar for information. He is directed to get the work executed as per approved drawings /Specifications within allotted cost.
7. HD/AAO / Divisional office for information & record.
8. File Concern.