

**OFFICE OF THE EXECUTIVE ENGINEER SPECIAL PHE JAL SHAKTI DIVISION
KULGAM**

Mr **Mohd Maqbool Dar**
S/o **Ab Ahad Dar**
R/o **Lirow Kulgam**
Regd No **KMR/PHED/PCR/1992-93-DEE-47 of 11/1992**
PAN No. **AJJPD6622Q**

No:- PHE/Wks/ **7497-99**
Dated::: **14-03-2024**

01AJJPD6622Q127

Allocation order No **130** of 2023-24

Dated.....**03/**.. 2024

Name of work: :Laying and fitting of (balance and additionally required) pipes for WSS Mirhama Modergam incl. installation of FHTC's as provided in DAP under JJM

Ref:- 1.This office e-NIT No.58 of 2023-24 issued under No.: PHEK/6723-28 Date: 16/02/2024.

Accord of Administrative No and date	CE/PHE/DB/JJM/236 of 08/2022 dated 01/08/2022
Technical sanction No and date:	CE/PHE/DB/82 of 08/2022
Advertised amount of work	RS12.88lacs
Alloted /restricted amount of work	Rs1030102.00
Rupees Ten lac thirty thousand one hundred two only	


For and on behalf of Lt.Governor of UT of J&K, the contract for the above work is hereby fixed with you on the following rates quoted/accepted by you on the terms and conditons given as under:

Sl.No	Bidder Name	Quoted /negotiated Percentage	Alloted Amount in Figures and Words	
			Rate	Amount
1	Mohd Maqbool Dar	Minus 20.00%	Rs1030102.00	Rupees Ten lac thirty thousand one hundred two only

DESCRIPTION OF ITEMS AS PER BOQ

S.No	Description of items	Quantity	Unit	Estimates rate	Total
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed:All kinds of soil	1365	cum	436	595140.00
2	Laying and fitting of G.I. pipes (all classes) complete excluding cost of pipes, fittings and Earth work: 65 mm and 80 mm dia. G.I. pipes	1000	mtr	73.05	73050.00
3	40 mm and 50 mm dia. G.I. pipes	3000	mtr	40.8	122400.00
4	25 mm and 32 mm dia. G.I. pipes	1500	mtr	30.65	45975.00
5	15 mm and 20 mm dia. G.I. pipes	7380	mtr	20.25	149445.00

6	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m	1228.5	cum	198.7	244102.95
7	Providing and fixing G.I. Union in existing G.I. pipe line, cutting and threading the pipe and making long screws including excavation, refilling the earth or cutting of wall and making good the same complete wherever required.: 65mm	4	Nos	886.25	3545.00
8	50mm	4	Nos	648.1	2592.40
9	40mm	4	Nos	492.3	1969.20
10	25mm	15	Nos	355.85	5337.75
11	20mm	15	Nos	315.7	4735.50
12	Providing and fixing G.I Bends/Elbows in existing G.I. pipe line, cutting and threading the pipe including excavation, refilling the earth or cutting of wall and making good the same complete wherever required.:65 mm	4	Nos	260	1040.00
13	50mm	4	Nos	160	640.00
14	40mm	15	Nos	92	1380.00
15	25mm	15	Nos	44	660.00
16	20mm	20	Nos	32	640.00
17	Providing and fixing G.I Reducer Sockets in existing G.I. pipe line, cutting and threading the pipe including excavation, refilling the earth or cutting of wall and making good the same complete wherever required.: 65mm x 50mm	2	Nos	120	240.00
18	65mm x 40mm	2	Nos	104	208.00
19	50mm x 40mm	2	Nos	88	176.00
20	40mm x 25mm	15	Nos	80	1200.00
21	40mm x 20mm	15	Nos	78	1170.00
22	25mm x 20mm	15	Nos	75	1125.00
23	20mm x15mm	20	Nos	72	1440.00
24	Providing and fixing G.I Nipples of different lengths in existing G.I. pipe line, cutting and threading the pipe including excavation, refilling the earth or cutting of wall and making good the same complete wherever required.: 65mm	2	Nos	224	448.00
25	50mm	2	Nos	200	400.00
26	40mm	6	Nos	152	912.00
27	25mm	15	Nos	96	1440.00
28	20mm	15	Nos	72	1080.00
29	Providing and fixing G.I Tees in existing G.I. pipe line, cutting and threading the pipe including excavation, refilling the earth or cutting of wall and making good the same complete wherever required.: 65mm x 50mm x 65mm	2	Nos	244	488.00
30	65mm x 40mm x 65mm	2	Nos	240	480.00
31	65mm x 25mm x 65mm	2	Nos	237.6	475.20
32	50mm x 50mm x 50mm	4	Nos	210	840.00
33	50mm x 40mm x 50mm	4	Nos	168	672.00
34	50mm x 25mm x 50mm	8	Nos	140	1120.00
35	50mm x 20mm x 50mm	15	Nos	136	2040.00
36	40mm x 40mm x 40mm	15	Nos	129	1935.00
37	40mm x 25mm x 40mm	15	Nos	120	1800.00

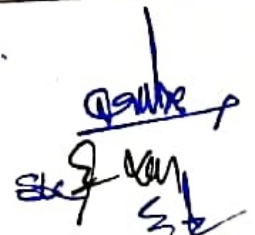

38	40mm x 20mm x 40mm	15	Nos	104	1560.00
39	25mm x 25mm x 25mm	15	Nos	100	1500.00
40	25mm x 20mm x 25mm	25	Nos	96	2400.00
41	Carriage of pipes from Source to Dumping Site by Mechanical Transport for an avg lead of 5 kms. Below 100 mm dia GI pipes	29.19	MT	183.36	5352.28
42	Carriage of pipes from Dumping Site to actual site of work for an avg lead of 50 mtrs. Below 100 mm dia GI pipes	29.19	MT	153.25	4473.37
Total:::					1287627.65
Deduction of -20.00% to Advt cost					257525.53
Total allotted cost after deduction					1030102.12

Terms and conditions:::

1	The allotted cost of the work is Rs1030102 (Rupees Ten lac thirty thousand one hundred two only). However the allotted cost should in no case exceed beyond DAP/DPR.
2	The date of start shall be reckoned from the date as mentioned in the LOI/allotment.
3	The work shall have to be completed within a period of (15) days from the date of issuance of this allotment order. failing which penalty upto 10% of the total value shall be imposed upon you.
4	Earnest money deposited by you Vide FDR No254764 Dated 22/02/2024 For Rs38650.00 and additional FDR for Rs64400.00 vide No 254902 dated 11/03/2024 shall be released only after the successful completion of work and after the expiry of defect clause.
5	The date of start of work shall be reckoned within one week from the date of issuance of this Contract allotment
6	The work shall have to be completed within a period of ninety (90) days from the date of issuance of allotment mentioned above
7	After testing and commissioning of work the bidder will have to make a trial run of the work for a period of 03 months during which the bidder will have to operate and maintain the executed work to the full satisfaction of the Department. the DLP. In case any defect remains unattended by the firm at the completion of DLP, the department may extend the DLP for such time as deemed fit for getting the defect rectified subject to maximum ceiling of 06 months
8	The defects Liability period shall be for a period of 12 Months which shall commence after the successful completion of Trai run The bidder shall be responsible to make good & remedy at his own expense any defect in works which is noticed during the DLP in case any defect remains unattended by the firm at the completion of DLP, the department may extend the DLP for such time The bidder shall be responsible for the time and proper setting out of all the works and for the correctness of the positions levels dimensions and alignment of all parts of the works and for the provision of all necessary instruments, appliances and labour in as deemed for getting the defect rectified subject to a maximum ceiling of 6 Months
9	The rates are including the Charges for Submission of progress Geo-tagged photographs, vidiographic record through the professional person before during & after construction and progress reports in both hard and soft copies Taking Cross-Sections I. Sections by Auto Level/ETS before and after execution Preparation of work abatraet of executed work. preparation of bills besides the rates quoted/alloted are inclusive of taxes and the tees viz GST/income tax/Cess etc shall be deducted at source from running account bills.
10	All the Cement RCC Steel plumbing and other works shall be strictly as per relevant IS Codes CPHEEO norms/requirements/specifications and normal PWD precautions
11	You shall be solely responsible for carrying out the mandatory tests required or as decided by Engineer-in-charge for the quality control at your own costs. The cost of conducting all tests shall be done by the contractor and shall be deemed to have been included in the term rates for various items of work and percentage rate tendered Nothing extra shall be payable on this account
12	You have to furnish the confirmatory survey, structural & functional design including geo-technical analysis, soil investigation and quality control tests done at your level duly vetted by DIGC as per terms & conditions of the NIT The vetting charges for the design if any are to be done by you


Handwritten signature and initials

13	The allotted works shall be subject to check by the third party monitoring agency (TPIOM) appointed by the Department. The agency shall check the quality of works executed by the agencies, quality of materials used for construction and quality of machinery nated in each scheme The TPIOM's role shall be that of an assistant to the Employer's Representative for the purpose of monitoring and evaluation of the performance of the Contract during the Contract Period
14	The provisional/lumpsum shall be executed as per the site conditions and specifications of CPWD/manual. Besides any item of work not included in the BOQ but required for the completion of the work, shall be executed by the contractor, as directed by the Department Such extra item shall be paid at J&K SSR 2020 rates with allotted appreciation /Deprisation of the contractor in case such item does not figure in J&K SSR 2020, the same shall be paid as per the current market rate analysis, to be approved by the competent authority
15	No price escalation will be paid for completion of the work within stipulated time or extended data of completion due to any reason whatsoever
16	No extra claim towards any type of tax, freight etc shall be entertained whatsoever.
17	No mobilisation advance shall be paid
18	Retention money/Security deposit shall be 10% of the contract value. The Security Deposit is to be recovered at the rate of 10% of bi amount from Running Account Bills and shall be released after completion of the defect liability period
19	In the event of allottee falling, declining, neglecting or delaying the supplies/works or in the event of any damage securing or being caused by the allottee or in the event of any default or failure by the allottee in complying with any of the terms and conditions of the contract, the Department shall with or without prejudice to any other remedies available to it under any law for the timebeing enforce in the UT
20	All risks of loss or damage to physical property and of personal injury and death which arise during and in consequence of the performance of the Contract are the responsibility of the Bidder.
21	Any failure or commission to carry out the provision of the contract shall not give any claim by the department or bidder one against the other if such failure of commission occurs by the ACT OF GOD which shall include all natural calamities such as fires floods earthquake, hurricane, strikes, roits, embargoes or from any political or other reasons beyond the control of the paries including war, or a state of insurgency
22	The bidder shall in connection with the work provide and maintain at his own cost all lights, guards, fencing and watching, when and where necessary or required by the Department for the protection of the work or safety and convenience of the Public etc
23	From the commencement of the work to the completion thereof the same shall be under the bidders charge The bidder shall be hel responsible for and make good any loss or injuries by fire or other causes/theft and shall hold the Government harmless for any eliams for injures to persons or damage a property happening from any neglect, default, want of proper care and misconduct on the part of the bidder, or any of his employees during the execution of work. The bidder shall be responsible for the compensation if any, to labour under the existing labour laws of the country
24	In the event of the death or insanity or insolvency or imprisonment of the bidder or where the bidder being a partnership or firm becomes dissolved or being corporation goes into liquidation, voluntary or otherwise, the contract may, in the option of the Engineerin charge be terminated by notice in writing posted at the site of the works
25	The damage caused to the work during execution or prior to actual completion of wondhanding over of the project before defect liability period due to any natural calamity human interference, the same shall be got restored and made good by you at your own cost
26	No damage is caused to existing structures like roads, bridges, buildings or other public utilites as a result of construction of this work .Where ever any damage oecures to any public/private infrastructure or public utility, the same shall be rectified/made good by you at your own cost
27	Adequate precautions be taken for environment and social protection besides, all safety practices in vogue be strictly adhered to during execution of work

[Handwritten signature and initials]

28	No objection certificate from the concerned regulatory authority may also be sought whenever required
29	All other terms & conditions will remain same as laid down in the original NH SBD GIR-2017/ Procurement Manual 2019/Operational guidelines for JIM

11.11

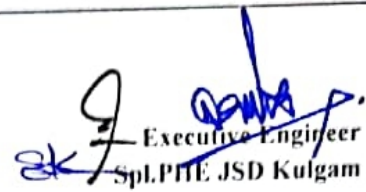

Executive Engineer
Spl.PHE JSD Kulgam

Copy to the
Superintending Engineer Hydraulic Circle Aantnag for favour of info
Asstt.Ex.Engineer PHE Sub-Division Kulgam for information
AAO Divisional office for information D.H. Arora