

OFFICE OF THE EXECUTIVE ENGINEER (JSD) PHE DIVISION

BARAMULLA

Email: kmrphebla@gmail.com (FAX) 01952234575 (Tel) 01952234244

Allotment Order No. **13 of 2024**

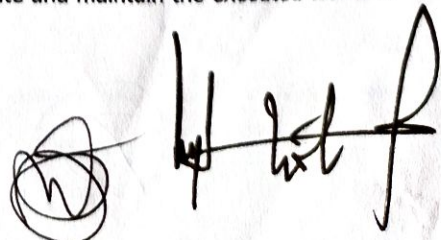
Dated: **16-08-2024**

Name of the agency/ contractor	Muzafar Ahmad Mir
Address	Logripora Bomai Sopore
Registration No.	SE R AND B SB-B-519
Contact/ Email	Muzaffarmir2020@gmail.com 6005908353
Name of work	Balance work for laying and fitting of pipes for WSS Ladoora under JJM.
References	This office ENIT 07 of 2023 dated: 30-07-2024.
Accord of administrative approval No. & date	93/SE/HYD/DB/JJM of 2022-23 dated: 24-09-2022.
Advertised Cost	Rs. 11.44 lacs
Allotted Cost	Rs. 8,00,542/- (Rupees Eight Lac Five Hundred Forty Two only)
Time of completion	120 days

For and on behalf of Lt. Governor of Jammu and Kashmir Union Territory, the above noted work is hereby allotted to you on quoted rates given in the Annexure "A" t this allotment, on the terms and conditions given here under :

Conditions:


01. Time of completion is essence of the contract.
02. The work shall have to be started by you at site immediately & ensure its successful completion within a period of **120** days from the date of issuance of allotment from this office strictly in accordance with the approved proposals failing which the work shall have to be got executed through any other means at your risk and cost, besides CDR deposited by you as security against this contract shall be forfeited.
03. An agreement shall have to be drawn up by you with the department within a period of 07 days from the date of issuance of allotment failure to execute such a formal deed shall not however prevent the contract from being enforced upon you.
04. The allotted works shall be subject to Check by the third party monitoring agency appointed by the Department.
05. Payment shall be released as per actual / measured work done not less than 20% of the allotted cost on a monthly basis.
06. Performance security equivalent to 03% of the value of the contract shall have to be deposited by you in shape of CDR/FDR/Bank Guarantee within one week of issuance of allotment order & Valid for a period of 03 months beyond the expiry of warranty period of the contract.
07. The firm shall be bound for satisfactory performance of works for 18 months after the successful commissioning of the works. If during warranty period any malfunctioning / defects arise, you shall have to rectify the same within a period of 10 days of receipt of intimation. In case of any failure on your part, the department may get the defects removed / repaired by any other means and cost thereof shall be recovered from you and shall be recommended for further punitive action as governed under the relevant clause of the contract including black listing.
08. After testing and commissioning of works you shall have to make a trial run of the works for a period of 03 months during which you have to operate and maintain the executed works to



- 13
09. The defective liability period shall be for a period of 12 months and shall commence after the successful completion of trial run.
 10. Pre & post Geo-tagged photographic evidence be taken during the execution of the work and shall have to be produced at the time of submission of the bill.
 11. Date of start of the work within 07 days from the date of issue of this letter. However date of start for laying and fitting of pipes will start within 02 days of issuance of pipe material by the department.
 12. All other terms and conditions shall be applicable as laid down in Standard bid Document & PWD form No. 25/33.
 13. Any rules/ terms and conditions if no stipulated in the bidding document, shall be strictly dealt in accordance with the relevant rules/ guidelines stipulated in General Financial Rules (GFR-2017 and manual for procurement of works 2019 G.O.I).

(Encl: Annexure "A")

No. 3017-28
Dt. 16-08-2024


Executive Engineer
Jal Shakti Department
PHE Division Baramulla

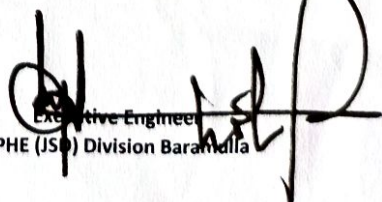
Copy to the :-

- 1/- Mission Director, Mission Directorate Jal Jeevan Mission J&K Civil Secretariat Srinagar/ Jammu for information.
- 2/- Chief Engineer Kashmir PHE Department Srinagar for favour of information.
- 3/- District Development Commissioner Baramulla (Chairperson DJJM) for favour information.
- 4/- Distt. Superintending Engineer Hydraulic Circle Bla/Bpr HQ Sopore (Member Secretary DJJM) for information.
- 5/- Additional District Development Commissioner Baramulla (Member DJJM) for information.
- 6/- Assistant Commissioner Development Baramulla (Member DJJM) for information.
- 7/- Divisional Forest Officer Baramulla (Member DJJM) for information.
- 8/- Chief Planning Officer Baramulla (Member DJJM) for information.
- 9/- Chief Medical Officer Baramulla (Member DJJM) for information.
- 10/- District Social Welfare Officer Baramulla/ District Tribal Welfare Officer Baramulla (Member DJJM) for information.
- 11/- District Information Officer Baramulla (Member DJJM) for information.
- 12/- Asstt. Ex. Engineer PHE Sub Division Watergam for information.
- 13/- File Concerned.

Name of Work: Balnce work for laying and fitting of pipes for WSS Ladoora under JJM

S.#	Item Description	Qty	Unit	Rate	Amount
1	Earth work in excavation by manual means in trenches for foundations, drains, pipes, cables etc. (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and ramming of bottoms lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed				
1.1	All Kinds of soil.	470.340	cum	436.000	205068.240
1.2	Ordinary Rock	313.560	cum	967.850	303479.046
2	Laying and fitting of G.I. pipes (all classes) complete excluding cost of pipes, fittings and Earth work.				0.000
2.1	20 mm G.I Pipes	1000.000	Mtr	20.250	20250.000
2.2	25 mm G.I Pipes	1275.000	Mtr	30.650	39078.750
2.3	40 mm G.I Pipes	2150.000	Mtr	40.800	87720.000
2.4	50 mm G.I Pipes	700.000	Mtr	40.800	28560.000
3	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead upto 50 m and lift upto 1.5 m.	705.510	cum	198.700	140184.837
4	Making connection of G.I. distribution branch with G.I. main of following sizes by providing and fixing Tee, including cutting and threading the pipe etc. complete				0.000
4.1	25 to 40 mm nominal bore	20.000	No	666.250	13325.000
4.2	50 to 80 mm nominal bore	4.000	No	1268.750	5075.000
5	Providing and fixing gun metal gate valve with C.I. wheel of approved quality (screwed end)				0.000
5.1	20 mm nominal bore	1.000	No	463.650	463.650
5.2	25 mm nominal bore	2.000	No	543.850	1087.700
5.3	40 mm nominal bore	2.000	No	704.700	1409.400
5.4	50 mm nominal bore	3.000	No	942.750	2828.250
6	Providing and fixing of MS flanged joints (12mm thick) to double flanged GI/DI pipes including cutting of pipes, welding charges, cutting of flanges, rubber gasket, bolts, nuts including testing of joint and all sorts of carriages. Complete Job.				0.000
6.1	100 mm dia. pipe	120.000	Pair	1520.000	182400.000
7	Welding, including transportation of plant at site etc. complete By electric plant	314.000	cm	6.200	1946.800
8	Providing and fixing D.I. sluice valves (with cap) complete with bolts, nuts, rubber insertions etc. (the tail pieces if required will be paid separately). Confirming to IS:14846 read with latest amendments.				0.000
8.1	100 mm dia. Class 1	2.000	No	13164.000	26328.000
8.2	150 mm dia. Class 1	4.000	No	20243.000	80972.000
9	Carriage of material by Mechanical Transport. Including loading unloading & Stacking upto site of work for an average length of 10 km Pipes below 100mm dia	13.837	M.T	249.654	3454.462
Total in Figures					1143631.135
Amount Quoted By : (- 30.000%)					343089.341
Total Allotted Cost in Figures					800541.795


I/C Head Draftsman


Executive Engineer
PHE (JSO) Division Baranidalla