



Government of Jammu and Kashmir (UT)  
OFFICE OF THE EXECUTIVE ENGINEER  
JAL SHAKTI (PHE) MECHANICAL DIVISION SOUTH AWANTIPORA.  
E-MAIL ID: [xenphemechsouthawp@gmail.com](mailto:xenphemechsouthawp@gmail.com) Fax/phone. 01933-295537



Allotment Order No: 26 of 06/2023

M/S Kanon Envirotec Engineers  
Prop: Atul Singh  
R/o: RZ -101/13-E, Street No. 04, Mohan  
Nagar, Pankha Road New Delhi-110046  
GST No: 07BHVPS632H1ZV  
Cell No: 9717044494  
Email: [kanonatul@gmail.com](mailto:kanonatul@gmail.com)

AA Accorded vide Order No.	CE/PHE/DB/242 of 08/2022 Dated: 31/08/2022
Tech. Sanction Accorded vide Order No.	(T.S by C.E) CE/PHE/DB/110 of 08/2022 Dated: 25/08/2022 (T.S by S.E) 36-PHE-MCS of 2022 Dated: 29-11-2022
Adv. Cost:	Rs. 87,01,000/-
Allotted Cost:	Rs. 87,00,905/-

Subject:- Supply/Installation/Testing & Commissioning of electro-mechanical equipments at Water Supply Scheme Halwani New & Halwani Cherward of Jal Shakti (PHE) Mechanical Division South Awantipora under JJM.

Reference:- 1. This office e-NIT No.: 74 of 2022-23 of 01/12/2022 issued under endorsement No.: JSD/PHE/MDSA/3977-90 Dated: 01/12/2022 read with Corrigendum No.: JSD/MDSA/4290 Dated: 20-12-2022.  
2. Superintending Engineer PHE Mechanical Circle (South) Srinagar's Office Letter No.: PHE/MCS/TS/129-31 Dated: 13/04/2023.  
3. Acceptance of rates/extension of validity of your tender confirmed by you.  
\*\*\*\*\*

Dear Sir,

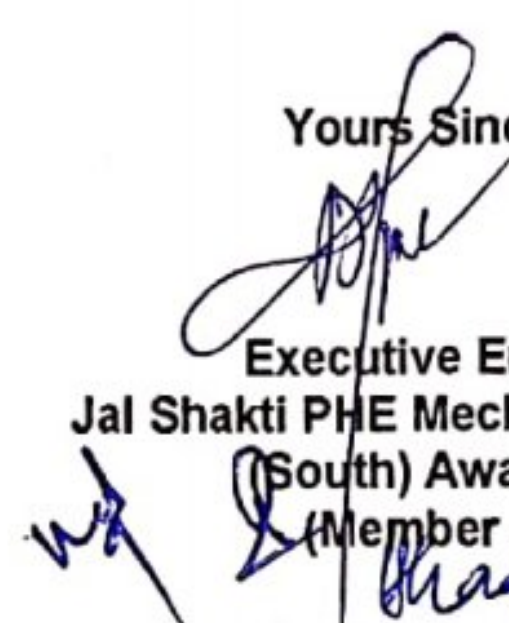
For and on behalf of Lt. Governor of J&K U.T contract for execution of aforementioned job is hereby fixed with you on item rate basis. This is in response to your online bid and subsequent acceptance of rates, specifications, terms and conditions as contained in Annexure "A & B" of this allotment order.

Encl. 17 luc

No.: MDSA/ 1113-20

Dated: 05 /06/2023

Yours Sincerely

  
Executive Engineer  
Jal Shakti PHE Mechanical Division  
(South) Awantipora  
(Member JJM)

Copy to the:

1. Chief Engineer Jal Shakti (PHE) Department Srinagar for information.
2. District Development Commissioner (Chairman DJJM) Anantnag for information.
3. Superintending Engineer Jal Shakti (PHE) Mechanical Circle (South) Srinagar for information. This is with reference to his No. under reference at Sl. (02) above.
4. Superintending Engineer Jal Shakti (PHE) Hydraulic Circle Anantnag/Kulgam for information.
5. Executive Engineer Jal Shakti (PHE) Division Bijbehara for information & n/a in light of civil components.
6. Provisional Head, TPIA JJM Kashmir, (WAPCOS Limited) Corporate Office 76-C Institutional area Sector-18 Gurugram-122015 (Haryana) for information.
7. Assistant Executive Engineer Jal Shakti (PHE) Mech. Sub Division Bijbehara for information & necessary action. He will ensure execution of work strictly in accordance with the rates, specifications, terms / conditions & within the stipulated time, besides, the cost of work should not exceed beyond allotted cost. In case of any delay in completion of work, the reasons shall be justified.
8. File concerned.

**ANNEXURE "A" to this office Allotment Order No: 26 of 06/2023**

**Name of work: Supply/Installation/Testing & Commissioning of electro-mechanical equipments at Water Supply Scheme Halwani New & Halwani Cherward of Jal Shakti (PHE) Mechanical Division South Awantipora under JJM.**

**General Terms and Conditions: -**

1. **TIME OF COMPLETION:** The scheme shall have to be completed/tested/commissioned within a period of 120 days from the date of issue of this allotment order.
2. **AGREEMENT:** A formal agreement deed shall be executed by the firm with the department within a period of 07 days from the date of issue of this allotment order after deposition of performance security @ 03% of allotted cost. However, non drawl of agreement will not prevent the contract from being enforced upon you.
3. **PENALTY:** In the event the contractor failing or delaying the work or a part thereof, & or non-complying with any of the terms and conditions of the contract, the NIT & the Agreement, the Department, without prejudice to the remedies available under the law in force in J&K UT, may terminate the contract after seven days' notice, and or recover the amount of loss caused by failure/delay or default of the contractor. The amount of such recoveries shall be determined by the Superintending Engineer PHE Mechanical Circle South Srinagar and or impose a penalty as the Government /Department may determine and or forfeit the performance security and or resort to any or all the remedial actions available under the law in force in the UT of J&K at the time of the dispute.
4. **ARBITRATION:** In case of any dispute arising at any stage between the contractor and the Department, the same shall be referred to the Superintending Engineer PHE Mechanical Circle South Srinagar /Govt. of J&K who may give a decision or nominate any other person of Government for arbitration. The decision to such arbitration shall be final and binding on both the parties.
5. **PERFORMANCE SECURITY DEPOSIT:** Soon after issuance of allotment order, the firm has to deposit performance security in the shape of CDR/FDR/BG valid for 18 months pledged to Executive Engineer PHE Mechanical Division (South) Awantipora within 07 days which shall be released after expiry of defect liability period/report of concerned AEE (After fulfillment of all contractual obligations). Failing to produce performance security, the firm is liable to be debarred for participation in future tendering in this Division and same shall be recommended to higher offices and other Govt. offices of UT of J&K.
6. **JURISDICTION OF COURT:** All disputes pertaining to this contract shall be subject to the jurisdiction of the Courts of J&K UT only.
7. **TERMINATION OF CONTRACT:** The department reserves the right to terminate the contract at any stage in case performance of the firm is found un-satisfactory in terms of any or all clauses of the NIT/Contract/Agreement in vogue.
8. **ADVANCE PAYMENT:** The Department shall in no case entertain any condition or request of making advance payment of any kind to the contractor during the execution of the work.
9. **TAXES, DUTIES LEVIES etc.:-** The rates offered by the Department shall be firm and final. Payment of Income Tax/GST, Octroi, Toll tax, Entry tax, Cess service tax duties and other levies etc. of the central or the UT Government and incidental charges of any shall be the responsibility of the contractor/firm.
10. **FORCE MAJEURE CLAUSE:** Any failure or omission to carrying out the provision of the contract shall not give rise to any claim by the department or the contract one against the other if such failure or omission arises from the Act of God which shall include all natural calamities such as fire, floods, earthquakes, hurricane strikes, riots, embargoes from any political or other reasons beyond the control of parties including the war whether declared or not civil war or a state of insurrection.
11. **ENGAGEMENT OF LABOURS:** The contractor shall not engage any workman below the age of 18 years. Firm/Contractor shall also comply with the provisions of labour laws and rules framed thereof and as prevalent in the UT of J&K. The contractor shall be responsible for any accident to the human life which may occur during the execution of work, compensation as shall be provided under law or any law will be payable by the contractor.
12. **INSURANCE:** The contractor shall insure all work-man at his own cost till the completion of work and take over by the department.
13. **DEFECT LIABILITY PERIOD:-** The defect Liability period shall be for a period of 12 Months which shall commence after the successful completion of Trial run, during the defects Liability period (DLP) the firm shall have to operate & maintain the scheme as it is required for its successful running & as per Standard Engineering Practices, to the full satisfaction of the department. The bidder shall be responsible to make good & remedy at

(Contd. On page...2<sup>nd</sup> ...)

Executive Engineer

22. **CONSIGNEE/PAYING AUTHORITY:** The consignee/paying authority in respect of electromechanical component and associated civil works shall be the concerned Executive Engineer, Jal Shakti (PHE) Mechanical Division Awantipora. Besides, the supervision of the various components of the civil work shall be carried out by the concerned Division under the overall coordination of the concerned Superintending Engineer Hydraulic Circle.
23. **TERMS OF PAYMENT:** All payments to the contractor for fulfilling the contract will be made as per the unit rates of Price Schedule (BOQ). All payments will be made in Indian Currency and will be subject to deduction of Income tax, GST, Cess at source, on the rates as are in vogue at the time of release of payment:-
- 65% of the contract value shall be paid on receipt of the material at site (as per the BOQ) in full & verification thereof by the concerned Assistant Executive Engineer.
  - 15% of the contract value shall be released on installation of ordered equipment/material in full at site.
  - 10% of the Contract Value shall be released after successful testing and commissioning of the entire equipment on full load, commissioning and trial run.
  - 10% of the Contract Value shall be released after commissioning of the scheme and satisfactory performance of the equipment for the period as enunciated in warranty clause. However the balance amount can be released against furnishing of Bank Guarantee for an equivalent value valid for three months beyond the expiry of the warranty period of the contract.

**CIVIL COMPONENT:**

Payment shall be released as per work done, as per actual measured work done not less than 30% of the allotted cost on monthly basis (for a completion period of three months)

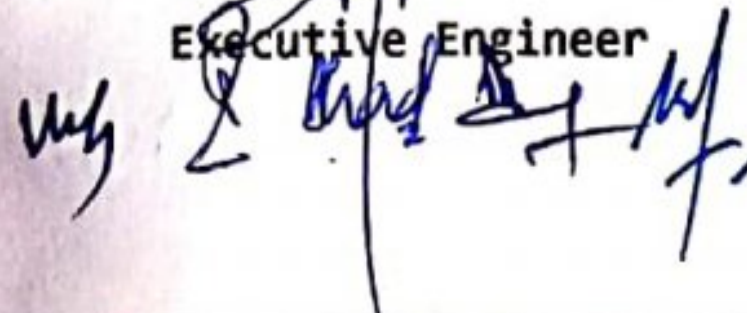
24. **WARRANTY:-** The Firm/contractor shall be bound for satisfactory performance of equipment/work **12 months** after the successful completion of trial run. If during warranty period, any malfunctioning/defect arises, the firm shall have to rectify the same within a period of ten days of receipt of intimation. In case of any failure on the part of the firm to remove the defect, the Department may get the defects rectified by any other agency and cost thereof shall be recovered from the firm and shall be recommended for further punitive action as governed under the relevant clause of contract including blacklisting.
25. **TRIAL RUN:-** After completion of work, the firm/contractor will have to make a trial run of the scheme for a period of **03 months** during which the manpower required for operation shall be provided by the Department.
26. **EQUIPMENT MAKE:** The supplied material/equipments should confirm as per specification of the contract as well as make confirmed by the Firm/contractor.
27. The work done claim should be supported with Geo tagged photographs before, during and after execution of the job.
28. **SITE OFFICE:** - The Firm/Contractor has to maintain at his own cost a suitable site office at the site of work to which the Department sends communications/instructions.
29. **TRAINING OF DEPARTMENTAL STAFF:** - The bidder shall arrange at his own cost and risk to depute at least one competent Engineer of the equipment manufacturer to train up to twelve departmental representatives in the operation & maintenance of the equipment at site. This training shall be for duration of at least 04 consecutive months and shall commence from the date of successful commissioning of the equipment or as may be mutually agreed upon. To groups of Departmental Engineers shall also be deputed to bidders/manufacturers works for short duration to obtain training free cost in the operation & maintenance of the equipment.
30. **DRAWING & QUALITY ASSURANCE PLAN:** - The Firm/Contractor shall be necessarily furnish within two weeks of the date of placement of this order which shall be approved by the Department within two weeks from the receipt by the consignee:-
- Sectional drawing of pumps.
  - General Arrangement Drawings (GAD)/ layout of the equipment fully dimensioned for pumps, motors, starters, shunt capacitors, panels, delivery manifold, cables etc.
  - Detailed circuit diagrams of LT Panels, Starters, Shunt Capacitors etc.

Quality assurance plan (QAP) of each piece of equipment to Third Party Inspection Agency (TPA) and Department for their approval.

No manufacturing/fabrication activity shall be started by the Firm without approval of the drawings of each ordered equipment by the competent authority. Additional time consumed due to observations/summary rejection of QAP/GAD shall not be considered in the delivery period of the contract and the bidder shall be wholly and solely held responsible for the delay thus caused.

(Contd. On page...4<sup>th</sup> -)

Executive Engineer

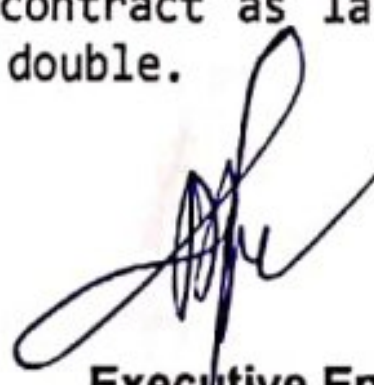


**31. INSPECTION & TESTING:-** Before dispatch from the works of the OEM, the electro-mechanical equipment shall be inspected by a third party inspection agency i.e. M/S CEIL/Rites etc. New Delhi. However, the Firm (Bidder) shall make payment to the Inspection Agency (in case of 3<sup>rd</sup> Party Inspection) which shall subsequently be reimbursed by the Department. The successful tenderer shall intimate the Department and the Inspecting Agency/Authority in advance regarding the readiness of the equipment for dispatch and shall furnish test certificates. It shall be responsibility of the suppliers to tie up with the third party nominated for inspection and get necessary inspection of the material done within the delivery period. Any delay on the part of the third party shall not be entertained as an excuse for timely supply of material. The product/ material at site shall be inspected by Assistant Executive Engineer concerned or any other official(s) of the department designated by the concerned Executive Engineer. Any modifications to the works as specified in the specifications considered to be necessary for smooth and trouble-free operation of the equipment by the Department or the third-party inspection agency, the firm shall have to execute the same without any extra cost, to the best satisfaction of the department. The firm shall as such keep the department informed about arrival of material at site. It shall be obligatory on the part of the firm to rectify the defects pointed out by the AEE, if any, and also to incorporate any modification within the scope of work which may be deemed necessary for better performance/finish and workmanship. The supplier upon demand by the department or its representative shall rectify or replace defective unsuitable equipment. The Department reserves the right to nominate his representative for inspection of the goods at the works of the supplier/ manufacturers. As such the department at all reasonable times shall have access to the works and to the site and to all workshops and places where work is being executed and where material / manufactured articles and machinery are being obtained. In case of Sub-Station and power/feeder lines, the firm shall have to obtain a clearance certificate from the concerned inspection Division of the Power Development Department. The list of electromechanical equipment in which third party inspection from CEIL/RITES is to be carried on:-

- 1) DG Set > 100 KVA.
- 2) Pumping Unit > 100 HP (Horizontal and Vertical)
- 3) Valves > 300 mm
- 4) Pipe > 200mm dia
- 5) HT Transformers > 300 KVA
- 6) Voltage Stabilizers > 500 KVA
- 7) Iron Removal Plant

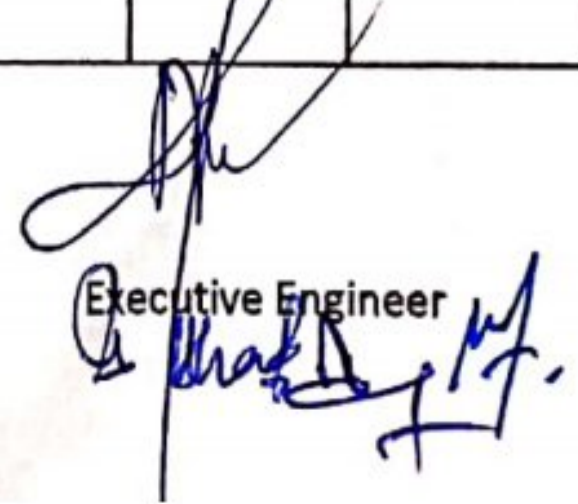
For items other than those manufacturers test certificate shall have to be provided. The HT transformers shall have to be got inspected from the corresponding wing of Power Development department and the necessary certificate shall be submitted along with the manufacturers test certificate.

32. The work is executed strictly in close supervision of AEE/JE/Supervisory staff concerned. However, the civil work if involved should be executed under close supervision of civil counterpart.
33. **WATCH & WARD OF WORKS:** The Firm shall in connection with the work provide and maintain at his own cost all lights, guards, fencing and watching, when and where necessary or required by the Department for the protection of the work or safety and convenience of the Public etc.
34. All other terms and conditions shall be the part of this contract as laid down in e-NIT/SBD/GFR-2017/e-procurement manual 2019 and PWD form "25" double.

  
Executive Engineer  
Jal Shakti PHE Mechanical Division  
(South) Awantipora  
(Member) JJM

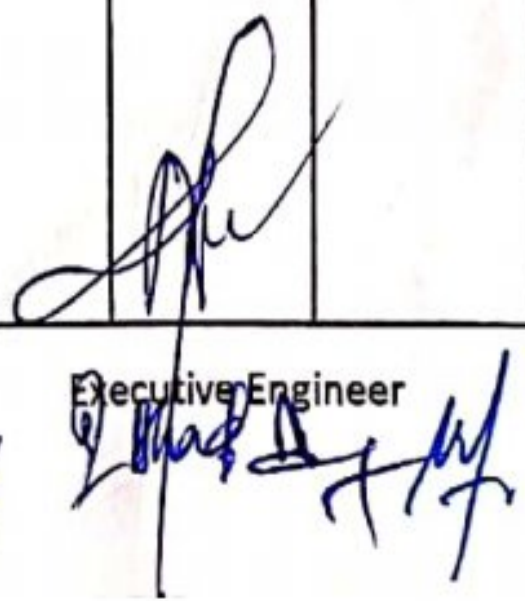
Annexure 'B' to this Office Allotment Order No. 20 of 06/2023 for WSS Halwani New & Halwani Cherward

	Description of Work / Item(s) with technical specifications	Nbs. of Qty	Units	Allotted/ Accepted Rate	Amount
00	<b>(Part A: Electro-Mech.) WSS Halwani New</b>				
2.00	Supply, Installation, Testing & Commissioning of Open Well Vertical Submersible Pumping Unit as per IS 14220 for with following specifications. <b>PUMP</b> Discharge Range = 3000-5000 GPH      Head Range = 100-130 mtrs Efficiency = Not less than 50%      Speed = 2900 Rpm Type of pump = Openwell Vertical Submersible Pump Type of fluid to be handled = Clear Water <b>MOTOR</b> Motor Rating = 15.00 HP      Method of starting = Star - Delta Speed = 3000 (Sync)      Frequency = 50 ± 3 % Hz Working Voltage = 380-415 ± 15% V, 03 phase Efficiency = Not less than 80%      Class of insulation = F <b>MATERIAL OF CONSTRUCTION</b> • Pump Casing - Cast Iron      • Impeller - SS • Pump Shaft - Stainless Steel 410      • Motor Body - Cast Iron/SS • Sealing - Dual mech seal □ The bowl plate shall be provided with name plate giving complete specifications. The motor shall be made of corrosion resisting materials to resist corrosion under normal conditions and the motor shall have a name plate giving complete specifications. Dual Mechanical Seals (01 No) and Bearings (02 No) for each pumping unit must be provided as spare parts for preventive maintenance by the firm. Note: Test certificate having the Serial No. of the Pumping Unit along with the performance curve in duplicate from the Manufacturer must be produced on delivery of the item and pumping unit is to be approved from the concerned Sub Divisional office before procuring (Make: KSB/Xylem/Kirloskar/Wilo)	2.00	Job	100555.00	201110.00
3.00	Fabrication, providing, fitting and lowering of B Class medium column pipe conforming to IS: 1239 of length 10 Rft into the 200/ 250/300 mm casing dia. Production well up to the desired depth. The job includes Providing and welding of flanges conforming to IS: 6392, Table-17 and PN 16 to these pipes and welding of flanges in two layers to make the flanged joint strong and leak proof. The pipe of 10 ft length is to be weld on both sides with flanges using welding rod of reputed make. The job includes all types of skilled labours, arrangement of power supply/ diesel Generator set etc required for the job including P/F of suitable size nuts bolts and R.I Gasket in the flanged joints of column pipes. The job further includes cutting of 2 no. rectangular cable slots in each flange. Size : DN 80 Class: B (Medium) (Make: Jindal Hisar/Surya Prakash/Tata)	3.00	Job	4948.00	14844.00
4.00	Providing/supplying and fitting of G.I flanged Rising Main at site. The Pipe shall be hot dip Galvanized, class B conforming to IS 1239. The job includes providing and fitting of M.S Flanges conforming to BIS 6392/1997 Table 17 (Rating PN16). The flanges shall be double welded both from inside and outside of the pipe using standard electrode of reputed make. Flanges (as per IS 6392/1997 Table:17) Thickness shall conform to IS 6392 Part 1st Table-17. The flange welding shall be carried out in double layers using reputed make electrodes to form strong welding joint. Welding Electrode DC Arc Welding using welding electrode having diameter not less than 4mm. Nuts and Bolts Nuts and Bolts (conforming to IS:1363 Part 1st) Rubber Insertion Gaskets Rubber Insertion Gaskets (conforming to IS: 638/79) to be used between flanged joints. The main technical specifications of the pipe are given here under: Size : DN 80 Class: B (Medium) (Make: Jindal Hisar/Surya Prakash/Tata)	1300.00	Mtr	1214.00	1578200.00
5.00	Earth work in excavation by manual means in trenches for foundation, drains, pipes, cables (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and reaming of bottom lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed. (All kinds of soil 01 meter from cutting edge)	351.00	cum	436.00	153036.00
6.00	Filling available excavated earth in trenches, plinth, sides of foundation etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by reaming and watering, lead upto 50 m and lift upto 1.5m.	316.00	cum	198.70	62789.20
7.00	Providing and laying hand packed stone soling 50 mm nominal size including filling, spreading, dressing, ramming, complete.	3.00	cum	616.00	1848.00
8.00	Centering and shuttering including strutting , propping etc. and removal of form work for Foundation, footings, bases for columns	5.00	Sqm	262.30	1311.50
9.00	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centring and shuttering . all work upto plinth level with 1 : 2 : 4 mix (1 cement , 2 coarse sand , 4 graded stone aggregate 20 mm nominal size)	13.30	cum	6434.00	85572.20
10.00	Fabrication, providing and fitting of washout Tee with arm length 1.2 feet each (Approx). The Tee shall be fabricated out of G.I C-class pipe with M.S Flanges conforming to BIS 6392/1997 Table 17 (Rating PN16) fastened with weld joints on three ends. The size of the Tee is given Below: Size : DN 80 Class: C Heavy	1.00	Job	4403.84	4403.84

  
 Executive Engineer

Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
11.00	<p>Providing and fitting of Ductile Iron double flanged, non-rising spindle soft seated glandless gate/shut-off valves as per IS 14842 for regulating the water supply outside the pumping units.</p> <p>The body and bonnet of the valve shall be of ductile iron, wedge with fully vulcanized EPDM rubber (Approved for drinking water) and NBR seal. The Gate/Shut-off valve shall be compatible for buried applications and shall be safe to install in both horizontal and vertical positions.</p> <p>It shall have electrostatic epoxy coating (approved for drinking water) both inside and outside of the valve. The valve shall be supplied along with hand wheel.</p> <p>Cost on account of Nuts, bolts, gaskets, etc. required for the job is included in the scope of work.</p> <p>The job includes providing and fitting of 02 nos. M.S. flanges (Table flanges) perfectly adaptable to the inbuilt flanges of the valve which shall be fitted with rising main of the pumping unit at appropriate spots as per site requirement. The job includes the cost on account of P/F of nuts, bolts and gasket required for the job.</p> <p>Size: DN 80 PN 1.6/16 (Make: VAG/Kirloskar/Sachdeva/Sigma Flow)</p>	2.00	No	15045.00	30090.00
12.00	<p>Providing and fitting of Ductile Iron double flanged, Slanted seat swing check valve (NRV) as per IS 5312.</p> <p>The body shall be of ductile cast iron with fully encapsulated vulcanized EPDM rubber (Approved for drinking water). The valve shall be compatible for buried applications and shall be safe to install in both horizontal and vertical positions.</p> <p>It shall have electrostatic epoxy coating (approved for drinking water) both inside and outside of the valve.</p> <p>Cost on account of Nuts, bolts, gaskets, etc. required for the job is included in the scope of work.</p> <p>The job includes providing and fitting of 02 nos. M.S. flanges (Table flanges) perfectly adaptable to the inbuilt flanges of the valve which shall be fitted with Rising main of the pumping unit at appropriate spots as per site requirement. The job includes the cost on account of P/F of nuts, bolts and gasket required for the job.</p> <p>Size: 80 mm PN 1.6/16 (Make: VAG/Kirloskar/Sachdeva/Sigma Flow)</p>	4.00	Job	16980.00	67920.00
13.00	<p>Providing, fitting, testing and commissioning of ARV (Air Release valve) as per IS 14845 to be fitted to G.I rising Main. The ARV Shall have the following specifications: -</p> <ol style="list-style-type: none"> <li>Valve type - single chamber, single/double orifice.</li> <li>End connection - flanged ends to IS 1538</li> <li>Working temperature (- 45°C to 15°C)</li> <li>Test pressure - body / seat 2.5 x PN</li> <li>Sealing ring - EPDM</li> <li>Construction - ductile iron with stainless steel floats</li> <li>Coating - epoxy with corrosion resistance</li> </ol> <p>Besides the above works, The job also cost on account of P/F R.I gasket, GI Pipe, nuts and bolts required for installation of ARV and arrangement of gas cutter/ welding set at site.</p> <p>Size: 50mm PN: 1.6/16 (Make: VAG/Kirloskar/Sachdeva/Sigma Flow)</p>	2.00	Job	19394.00	38788.00
14.00	<p>Fabrication, Providing and fitting of 90-120 degree bend/elbow to be fabricated out of G.I pipe, 1 m length and flanged on both ends to make it leak proof. The flanges shall be M.S Flanges conforming to BIS 6392/1997 Table 17 (Rating PN16) and welded on both sides. The job includes nuts, bolts, gaskets etc as per site requirement.</p> <p>Size: DN 80</p>	10.00	No	2715.00	27150.00
15.00	<p>Fabrication, providing and fitting of split type MS clamps 10 mm thick, 2 ft long and 3 inch wide for lowering and holding of pumping unit fitted. The job includes the cost of required size of nuts and bolts.</p> <p>Size: 80 mm</p>	2.00	Job	1801.00	3602.00
16.00	<p>Fabrication of gantry mechanism/CGI Shed by way of providing Structural steel in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of steel primer and 02 coats of paint of approved shade all complete welded.</p> <p>The drawings and Dimensions for Gantry/CGI Shed will be provided by Site In Charge at the time of execution of job.</p>	1550.00	Kg	102.00	158100.00
17.00	<p>Fabrication of gravel Hooper for proper feeding of gravels to the bore well and platform to bear the load of pumping unit, column pipes etc by way of providing and fitting of Steel work welded in built up sections/framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. The job involves following steel details:</p> <ol style="list-style-type: none"> <li>In stringers, treads, landings etc of stair cases including use of chequered plate wherever required, all complete</li> </ol>	226.00	Kg	115.00	25990.00
18.00	<p>Providing and fitting of M.S 4 inch hinges -6 no and M.S handle heavy -2no., Anchor bolts with nuts (M16) of 0.3 m long = 04 No. Metallic strip (350mmx50mmx3mm) = 02 No.</p>	1.00	Job	2500.00	2500.00
19.00	<p>Providing, installation and testing of manual type triple spur gear chain pulley block along with monorail geared travelling trolley having following features Gears:- The hoist shall have precision machine case Hardened alloy steel gear mounted on bearings and housed in a dust proof gear box. The lubrication of gears should be of high viscosity and temperature for longer life of gears.</p> <p>Load Chain:- The load chain be made of high tensile alloy steel having wear resistance and greatest mobility. The chain should be accurately collaborated, tested and have adequate in built factor of safety for safer operation.</p> <p>Load chain wheel:- the load chain well should be double ball bearing supported and Specially designed, perfectly machined wheel providing correct grip of load chain to makes the hoist most safe and reliable against any failure. The main specifications of C.P Block are given below :</p> <p>Make = Pull Lift/Globe Capacity = 2 Ton No. Of load chain falls = 2 or above Min. Height of lift = 6 M</p>	1.00	Job	44473.00	44473.00

Executive Engineer  



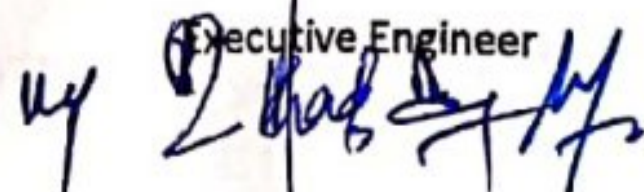
Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

No.	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
20.00	Supply, installation, commissioning and creation of 25 KVA 3 Phase Level 2 pole mounted, outdoor type Electric Sub Station as per the technical specifications given here under - Specifications conforming to IS 1180 (Part 1) 2014 with latest amendments. Type HT/LT Transformer Type of cooling ONAN Operating conditions. Input =11000 volts Output =433 volts AC supply in 3- phase. Terminals Input=3 No. HT bush rods with insulators, washer, nuts etc. Output=4 No. LT bush rods switch insulators, washers, nuts etc. Core: The core shall be of high permeability to reduce core losses and the strips shall be of suitable size and gauge. Transformer Coils: Suitable number of HT and LT coils in each leg of the core. The transformer coils shall be fabricated out of superior quality aluminum wire/strips properly wound. The HT transformer is completely filled with suitable grade transformer oil up to required level. The job includes carriage, and all leads and lifts involved. The HT transformer shall be of reputed make from an ISO certified company as per relevant standards and a test certificate shall be provided before installation. The transformer shall also be provided with breather fill with silica gel crystals, conservator with oil level indicator, explosion vet and adequate radiator fins/ Tubes. The impedance of transformer shall be as per IS 1180 (Part 1) 2014 with latest amendments. NOTE: The scope of the work shall include obtaining of necessary inspection/clearance certificate from the concerned department for all the required equipment. The testing and commissioning shall be completed only after obtaining above certificate. (Make: KIN India/Aditya Power & Controls/JK/Alba)	1.00	Job	67674.00	67674.00
21.00	Providing and fitting G I Channel /Angle/ Flat of sizes including clamps.	357.00	Kg	123.00	43911.00
22.00	Supply, Installation, Testing and commissioning of Polymeric Gang operated Air break switch, outdoor type, triple pole, suitable for vertical installation, single break provided with locking arrangement at both ON and OFF position consisting of HT post double insulator, copper or copper alloy high pressure heavy contact assembly, rod with bearings, operating handle and 2 length of 32mm dia. GI pipe conforming to IS 1818 1961, 06 No. of insulators, rated voltage 11KV 200A complete as per IS specs.	2.00	Job	11388.00	22776.00
23.00	Supply, Installation, Testing and commissioning of 11KV polymer fuses Set Horn Gap 3-phase 200 A suitable for vertical installation.	1.00	Job	4838.00	4838.00
24.00	Supply, Installation, Testing and commissioning of Gapless Surge arrestor station class, 10KA, 9KV, LA With polymer housing, Station Type.	1.00	Set	7528.00	7528.00
25.00	Supply and fitting of 11 KV polymeric composite pin insulator 12 KV, 5KN, Lighting impulse 75KV Positive, and 80 KV Negative, creepage distance 320mm	36.00	Job	337.00	12132.00
26.00	Supply, installation, erection of 9 mtrs long H.T pole of specifications ST- 410 (sp-33). The job further includes drilling of holes for installation of various accessories, wherever required the job further includes G.I wire earthing of pole as per REC standard.	12.00	No	20083.00	240996.00
27.00	P/F of Galvanized nuts, bolts of various sizes as per site requirement.	48.00	Kg	138.00	6624.00
28.00	P/F Danger Plate with clamps.	12.00	No	148.00	1776.00
29.00	Providing and fixing G.I Barbed wire for anti climbing/ anti climbing devices with clamps.	48.00	Kg	132.00	6336.00
30.00	Providing and Fitting of PG clamps	8.00	No	409.00	3272.00
31.00	Providing and fitting of Galvanized stay set with 50 X 8 mm Stay Clamp, Guy insulator (2no.), Anchor plate (200X200X6mm), nuts and bolts, 2 NO- turn buckle, 1.8 m long, 16 mm diameter solid G.I stay rod & 7/3.15 mm dia. G.I stranded wire complete.	10.00	Set	4779.00	47790.00
32.00	Painting of poles with Red oxide	12.00	Lit	297.00	3564.00
33.00	Painting of poles with Aluminum paint	12.00	Lit	495.00	5940.00
34.00	Providing and fitting of ACSR as per IS 398 (part-2) 1996 for 50 sq.mm ACSR (Galvanised steel reinforced) for fitment of various accessories	60.00	Mtr	55.00	3300.00
35.00	Supply, Installation and Testing of 35 Sq mm XLPE Aluminum H.T cable (ABC type) of 11 KV grade with following specs. Size (cross sectional area in sq mm) = 3x35 with reinforced wire Phases: Red, Yellow, Blue (Make: Havells/KEI/Finolex)	360.00	Mtr	794.00	285840.00
36.00	Providing and fitting of Anchoring clamps comprising clamp body, plastic wedge, steel bill bracket, straps and buckles or nuts and bolts required for holding of 3 - Core, 35 Sq. mm H.T AB Cable.	12.00	Job	457.00	5484.00
37.00	P/F of 11 KV cable termination kit for connecting 35 Sq mm XLPE cable (ABC type) with the existing HT line near tapping point and HT transformer.	4.00	Job	8732.00	34928.00
38.00	Providing and fitting of LT Distribution box for H.T transformer with MCCB For incomer and SFU for outgoing circuits. Capacity of transformer: 25 KVA	1.00	Job	28118.00	28118.00
39.00	Providing and fitting of PRODIGY LT Metre of following specification complete with all fixtures required for fitment at site Type: E3L100, 3 Phase, 4 wire Measurements offered: KWh, KVARh, KVAh, KVA Voltage : 3x240V(415v), 50HZ Ib : 40A Imax: 200A Battery: Lithium	1.00	Job	28000.00	28000.00

Executive Engineer

Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

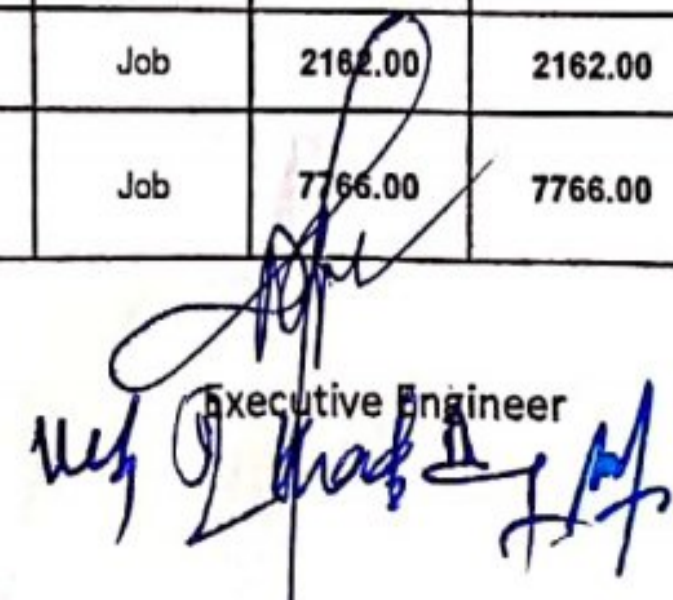
	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
40 00	<p>Fabrication, Providing and fitting of MUG-20 Modular motor control panel of appropriate size fabricated out of 14 SWG sheet having required openings/vents and protection Class IP-55 &amp; fitted with accessories as under</p> <p>a) Bus bar Chamber The bus bar chamber shall be fitted at the top of the panel horizontally throughout the length. There shall be 3 Nos. of phase bus bar and 1 No neutral bus bar and 1 No earthing bus bar. The bus bars shall be air insulated and made-up of high conductivity COPPER with current density of suitable rating for 100/200 Ampere. All panel compartments shall be provided with suitable cable alley and vertical bus bar alley. Suitable segregation shall be provided in between bus bar chamber and adjoining compartments. The bus bar shall be PVC sleeved with color stripe of red, yellow, blue and black and the same be arranged in accordance with IS-375 specs. Electrical clearances shall be maintained between phases, neutral and body as per standards.</p> <p>b) Main Circuit Breaker (Incomer MCCB) Qty = 02 No. of poles = 4 Pole Current Rating = As per requirement Rated operational voltage = 415 V + 15 % Rated frequency = 50+/-3%Hz Ambient temperature = 40C Ultimate S C Breaking Cap at (415V AC, 50 Hz) = As per requirement Type of release = Thermal-Magnetic Overload protection = 0.8 - 1*in adjustable Short-circuit protection = 6-10*in adjustable. Current rating = As per requirement</p> <p>c) Change over Switch Qty = 01 No. Rating = As per requirement Type = Front operated, on load, 4 pole, 400 +15%V, 50 + 3%Hz.</p> <p>d) Motor Back-up Protection MCCB: Qty = 2 No No. of poles = 3P Current Rating = As per requirement Rated operational voltage = 415 V +15 % Rated frequency = 50 + 3% Hz Ambient temperature = 40C Ultimate S C Breaking Cap. at (415V AC, 50 Hz) = As per requirement current rating = 200 A a. Submersible starters:- Fully automatic star delta/DOL starters. b. Capacity = As per requirement Power Specs = 3 Φ, 415 + 15% V, 50 + 3 % Hz. Relay range = As per requirement. Coil Voltage = 380 v Protection = single phasing , phase Reversal, phase unbalance (55 ± 5 V), Rated insulation voltage = 690V Terminal capacity = 120 Sq. mm with lug Or above Conformity to standard = IS/IES 60947-4-1 Qty. = 2 No's</p> <p>e) Auxiliary MCCB for Heating/Lighting: Circuit Breaker = MCCB (Outgoing) Qty. = 1 No. No. of poles = 4P Current Rating = As per requirement. Rated operational voltage = 415 V + 15 % Ultimate S.C Breaking Cap. at (415V AC, 50 Hz) = As per requirement</p> <p>g) Motor Protection Relay: Digital Motor Protection Relay with LCD Display for 3-phase supply with following protections suitable for the Modular Control Panel:- Protections = Thermal Overload with pre-alarm, Short Circuit, Phase Loss, Unbalance, Phase reversal, Under Current, over current, Prolong starting, Locked Rotor, Under voltage, over voltage &amp; Earth fault. h. M-power module for mobile starter for submersible motor 1P/3P 3 wire IVRS Languages – English , Hindi, Suitable Region- North India f) The panel shall be provided with phase indicators (03 NO) and digital ammeter of range 0-60 A, digital voltmeter of range 0-500 V, and digital frequency meter (01 No for each starter). The enclosure of the panel shall be of excellent fit and finish, corrosion resistant and powder coated gliding hinges for smooth and noiseless movement of windows and advanced locking arrangements. MUG 20 Modular Panel Details/Description item wise along with specifications i) Bus bar size (10 mtrx .02 mtrx 0.003 mtr x)8960 kg/m<sup>3</sup> = 5.38 kgs @ 1000 100A ii) D-sine MCCB 4 pole (DZ1 160N, 108-160, 50KA) iii) Change over switch 100A iv) D sine MCCB 3 pole DNO 100D, 80-100, 36KA) v) Mug x 2 (Mug20, 20-32A Relay) vi) Auxiliary MCCB 63Amp 4 Pole vii) MM 10 of L@T (Motor Protection) viii) Module for mobile starter ix) Meter,(Ammeter &amp; voltmeter) 2No. each and Freq Meter x) Indicators LS xi) Over load and Under Voltage Minlec (Change Over/MCCB Make: L&amp;T/Havells/Siemens)</p>	1.00	Job	174612.00	174612.00

  
 Executive Engineer  





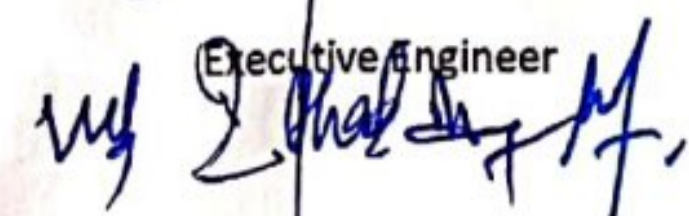
Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
41.00	Providing, fitting, testing and commissioning of 40 KVA voltage stabilizer as per specifications below Type of voltage controller: Manually operated copper wound, 3-phase AC power supply multi step Type of Regulator: Double plate type with electrolytic copper contacts. Input voltage: 250-400 volts (3 phase) Output voltage: 400 ±10% volts Frequency: 50 ±3 C/S Windings: Electrolytic grade copper of adequate section, vacuum impregnated and oven-dried Insulation: Fiber glass insulations to tested parameters. Cooling: Naturally, Oil cooled Temp. Rise (Max): 30°C above ambient Mounting: On Uni-directional wheels. Correction rate: 30 volts per step Wave form distortion: virtually nil Duty cycle: 100% continuous Enclosure: MS sheet enclosure in pressed CGR Sheet powder coated with radiators. Core laminates: High grade, low eddy loss, grain oriented silicon steel laminations Load: Three phase induction motor load. Load Amperes (continuous) Overload in 24-hours operation: 10% above continuous Ampere rating The voltage stabilizer shall have T-oil level indicator gauge preferably glass type tube or otherwise visible to naked eye. The top of the container to have a display panel for housing 02 numbers Digital voltmeters (0-500V) along with 4-way selector switch and set of neon indicators for incoming and outgoing phases (06 No's). Insulating media (T. Oil) of 11 KVA grade to be provided and filled up to top level, with dielectric strength of 5 KV at 4m air gap. The T-Oil of specific grade should be provided in separate barrels and filled at site up to top level. The voltage Stabilizer shall be accepted with manufacturers dully stamped test certificate and shall have name plate with specifications.	2.00	Job	89303.00	178606.00
42.00	Providing and Fitting of XLPE, 1.1KV and 11KV grade Armoured Aluminum Cable of various sizes conforming to IS: 7098 part 1st as service line from the HT transformer to control panel including necessary thimbling, crimping, taping etc. i) 35 sqmm, 3 core, LT cable (Make: Havells/KEI/Finolex)	90.00	Mtr	362.00	32580.00
42.01	ii) 10 sqmm, 2 core, LT cable (Make: Havells/KEI/Finolex)	50.00	Mtr	154.00	7700.00
43.00	Providing and fitting of 3-Core flat submersible copper cable conforming to IS: 694 (Part 1st) - 1964 & IS: 694 (Part 2nd) - 1964 for Submersible Pumping Unit and other electrical Equipment. The cable connections terminal shall be fitted with copper thimbles of required size. The main specification of the cable is given below: Size 16 sq mm (Make: Havells/KEI/Finolex)	270.00	Mtr	711.00	191970.00
44.00	Providing and fitting of 25 mm square single core copper cable for interconnecting various electrical gadgets as per IS 694: 2010 along with thimbling as per requirement. (Make: Havells/KEI/Finolex)	180.00	Mtr	365.00	65700.00
45.00	Providing and Fitting of cable tray of suitable size for carrying the cable inside the machinery room.	50.00	Mtr	1000.00	50000.00
46.00	P/I of earthing station for electric substation, LT panel, DG Set and stabilizer comprising of company fabricated earthing electrode as per IS: 3043. The job includes Auguring of bore of required dia/depth for installation of electrode along with backfill compound mixed with soil and all other items required thereof for achieving the best result. The job includes connecting of electric gadgets through GI strip as per relevant standards. Safe earthing electrode size: 65/80 mm dia (As specified), Length: 2000 mm Back fill compound: 30 kg	6.00	No	10462.00	62772.00
47.00	Illumination of Premises: Providing and erection of 9 Mtr long Hot Dip Galvanized octagonal pole (single Section) with bottom 150mm, top 75mm wide, thickness 3mm with 70 Microns Zinc coating having inside arrangement for providing of power connection along with following items. 1) 3 Way Terminal Connector 20 Amp. 2) 3 No MCB 8 Amp. The job includes fabrication, providing and fitting of three arm GI structure at the top having 120° angle between arms and each arm having 15° inclination with respect to horizontal plane. Each arm should be of 2' length and size and shape appropriate as per requirement of the luminary. The job also includes providing and fitting of required length of flexible multistrand 2 mm copper wire from each terminal connector to each holding arm. The pole is mounted on 1:2:4 Cement concreting of size not less than 2'x2'x6" (cost of concreting not included in the job) using 04 No anchor bolts of required size not less than 7" in length. The complete job includes earthing in GI Electrode as per relevant IS Code	1.00	Job	21168.00	21168.00
48.00	Providing, installation, testing and commissioning of area lighting 120 Watt LED (Street Light Type) on top of octagonal pole. (Make: Havells/Phillips/Bajaj) Having following specs: Input: 90-240 V 50 Hz Power Factor: >0.9 Colour Temperature: 4K - 6.5K Beam Angle: 120° - 170° Lumens: >12000 Operating Temperature: -20°C to 60°C The LED is pressure die cast aluminum housing with power coated finish and having Ingress Protection up to IP-68. The LED is properly fitted on the arm of the pole and connected to the copper wire as provided in the high mast pole	3.00	Job	8866.00	26598.00
49.00	Providing and installation of Junction Box with DP 32 A MCB to serve as Main switch for LED Lighting. The job includes making of electric connection to the circuit.	1.00	Job	2162.00	2162.00
50.00	Providing, Installation and testing of 2KVA fully automatic voltage stabilizer with input voltage 70-240 V and output 220 V. The stabilizer shall be installed and connected to the electric circuit as per location provided by site in charge.	1.00	Job	7766.00	7766.00

Executive Engineer  



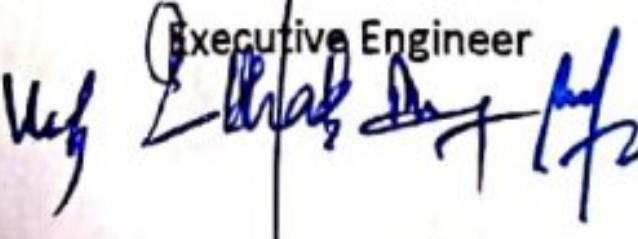
Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
51.00	Supply installation, Testing & commissioning of 1000VA Full Size wave power inverter (Make: Luminous/Lvguard/Microtek/Exide) including Providing / Installation of 12V 100AH Tubular Inverter Battery with trolley and cover (Make: Amaron/Exide/Luminous) with 2 core 8mm <sup>2</sup> Cu wiring as per site requirement along with other accessories like SS-Combine (02 No's), 3 pin plugs etc. of required make for proper fitment and installation of the item.	1.00	Job	34053.00	34053.00
52.00	Providing, laying & fixing of shock proof rubber mats with adhesive/bonding material on the floor of the pump house covering area around electro-mechanical machinery for safeguarding the life & limb of the workmen due to possible leakage of current & short circuit. The floor surface shall be made good & shall be free from dust, grease, foreign material & moisture free. The mats shall be as per IS 15652:2006 & shall have the following specifications: - Composition: Rubber (synthetic mats for electrical purpose) Thickness: - 2.5mm Size: - 1M wide The rubber mats shall be accepted with manufacturers test certificate.	10.00	Mtr	1205.00	12050.00
53.00	TOOL KIT For Maintenance - The Tool kit for maintenance shall comprise of the following and all the items as mentioned below shall be of Providing of tool kit consists of following items i. Double ended Spanner (Chrome plated) 02 sets complete ii. Double ended Ring spanners chrome plated 02 sets complete iii. Allen key set black finish 02 sets complete iv. S-16 MXL, S- 16 H X L Socket Set (19 sockets + 6 Accessories) - 01 No. Combination Pliers insulated with thick C.A sleeve, size in mm 165, 210, 255 each - 02 No. v. Long nose plier insulated with thick C.A sleeve, size in mm 165, 205 each - 02 No. vi. Side cutting plier insulated with thick C.A sleeve, size in mm 165, 205 make - 02 No. vii. Insulated screw Drivers Blade Blade Tip Quantity length in dia. in dimensions mm mm in mm 50 3 1 6 x 0 4 02 75 3 1 6 x 0 4 02 100 3 3 x 0 4 02 125 3 5 3 5 x 0 5 02 150 3 5 3 5 x 0 5 02 200 4 4 x 0 6 02 300 5 5 x 0 8 02 viii. Hammer with handle weight - 110 mg, 340 gm, 600 gm -each - 1No. . ix. Heavy duty pipe Wrench length in mm - 200, 300, 600 each - 01 No. x. Electric Multimeter =1No xi. Digital multimeter - 1No. xii. Digital Clamp tester capable to measure up to 400A - 1 No. xiii. Hack saw frame with hack saw blade - 01 No. xiv. iv. S-16 MXL, S- 16 H X L Socket Set (19 sockets + 6 Accessories) - 01 No.	1.00	Job	28840.00	28840.00
54.00	Providing of good quality bedding for night stay/Shift consisting of: - i) Mattress with warm cover size 6'x3' (6Kg)- 02 No's ii) Quilt with warm cover size 5'x8' (6Kg)- 02 No's iii) Pillows with covers - 02 No's iv) Single bed warm blankets with one sided Fur- 02 No's The filling material for mattress, quilt and pillow shall be of good quality cotton b) The job also includes providing of pressure cooker 5ltr 02 No's, Steel patella (utensil) 5ltrs 02 No's, cooking heater 01 No., room heater 01 No., steel buckets 10 litre capacity 01 No., Plastic bucket 10 litre capacity with Mug 02 No's each, steel glasses 06 No's, steel Plates with large spoons and bowls 03 No's each, Cup and Saucer set (01 No. Set) and, 5kg Gas cylinder with burner/ stove. The job also includes providing of thermo-cool 15'x12' along with excel matting of 15'x12' size. The job also includes providing of unbreakable Plastic Chair table set consisting of chairs 04 No's, extra heavy Table 01 No. The job also includes providing of good quality safety Door locks (03 No's) of Godrej, Link locks	1.00	Job	39619.00	39619.00
55.00	Fabrication of 7' (L) x 6'(B) x 1.5' (H) angle iron bed for operators with back-height of 2 feet by way of providing and fitting of Structural steel in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete welded. The detailed drawing will be provided by site incharge.	114.00	kg	93.00	10602.00
56.00	Providing and fitting of 19 mm thick multilayered ply sheet of size 6 x 3 feet, 3 no's including cutting, fixing all complete including painting of the play sheet by one coat of primer and two coats of enamel paint.	54.00	sft	140.00	7560.00
57.00	Providing of solar/ electrical lantern chargeable on both solar & electrical 220v supply.	1.00	Job	1911.00	1911.00
58.00	Providing of bamboo ladders 18 feet long along with 15 feet long Link rods and HT Glove pair (01 No each)	1.00	Job	7350.00	7350.00
59.00	Providing of 1 KW heat convector for operators for winter season.	1.00	Job	1205.00	1205.00
60.00	Providing and fitting of 01 No. LED (scroll type) sign board fabricated out of stainless steel and metal showing the names of water supply scheme and the Department. Size: 6'x1'6" = 9 sft	9.00	Sft	3998.00	35982.00
61.00	Providing and fitting of 01 No. angle iron/sheet metal board duly painted showing various specifications of the mechanical and electrical equipment installed at site of appropriate sizes. Size 7'x5'	35.00	sft	250.00	8750.00

  
 Executive Engineer  



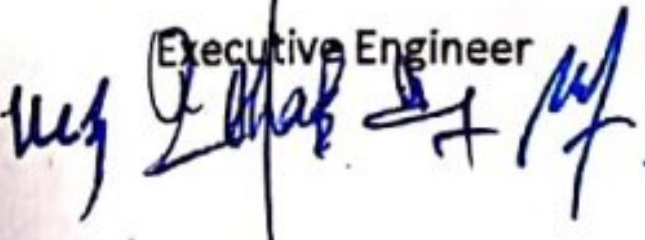
Annexure 'B' to this Office Allotment Order No. 28 of 06/2023 for WSS Halwani New & Halwani Cherward

No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
62.00	Providing and fitting of L.T. 35 sq mm 1 core, capable to work up to 11 KV, XLPE insulated, galvanized steel strip armored copper cable conforming to IS : 7000(part -1) 1988 with latest amendments. The job includes providing and fitting of suitable rating copper thimbles duly crimped and taped at conductor ends by hydraulic crimping tool. The job includes earth work in excavation wherever required for laying of cable underground (Make: Havells/KEV/Inolex)	150.00	Mtr	506.00	75900.00
63.00	Providing corrugated G.S. Sheet roofing on all sides of DG shed including vertical/ curved surface fixed with polymer coated J or L Hooks, bolts and nuts 8 mm dia. diameter with bitumen and G.I limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (upto any pitch in horizontal/vertical or curved surface) excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required 1.25 mm thick with zinc coating not less than 350 gram/m <sup>2</sup>	60.00	Sqm	1713.00	113058.00
64.00	Providing, Installation, Testing & Commissioning of complete switchgear unit for protection of D.G Set consisting of 200A MCCB 3- pole, 415 V, 50 KV breaking capacity housed properly in cubical enclosure made up of M.S SWG - 16 sheet steel (outdoor type) duly powder painted with anti-corrosive paint comprising of three compartments for incoming / outgoing circuits and MCCB. The panel should have adequate double locking Arrangement with Cu- Bus Bar 12x40 mm with Bakelite insulation and LT Arrangement selector switches, phase indicators. The equipment should be installed at appropriate height in a stand consisting of 50 x 50 x 6 mm angle grouted in ground with appropriate cement bottoming as per the IS standard.	1.00	Job	39422.00	39422.00
65.00	Carriage of sand, stone aggregate, stone soling by mechanical transport including loading, unloading and stacking (average distance-5km)	70.00	cum	197.00	13790.00
66.00	<b>WSS Halwani-II (Cherward)</b>				0.00
67.00	Supply, Installation, Testing & Commissioning of Submersible Pumping Unit as per IS 14220 for with following specification are as under : PUMP : Discharge Range = 2000-4000 GPH      Head Range = 110- 135 mtrs Efficiency = Not less than 50%      Speed = 2900 Rpm Type of pump = Submersible Pump/Mixed Flow Type of fluid to be handled = Clear Water MOTOR:- Motor Rating= 10.00 HP      Method of starting = Star - Delta Speed = 3000 (Sync).      Frequency = 50 ± 3 % Hz Working Voltage = 380-415 ± 15% V, 03 phase Efficiency = Not less than 90%      Class of insulation = F MATERIAL OF CONSTRUCTION: • Pump Casing : Cast Iron      • Impeller : SS • Pump Shaft : Stainless Steel 410      • Motor Body : Cast Iron/SS • Sealing : Dual mech. seal □ The bowl plate shall be provided with name plate giving complete specifications The motor shall be made of corrosion resisting materials to resist corrosion under normal conditions and the motor shall have a name plate giving complete specifications. Dual Mechanical Seals (01 No) and Bearings (02 No) for each pumping unit must be provided as spare parts for preventive maintenance by the firm. Note: Test certificate having the Serial No. of the Pumping Unit along with the performance curve in duplicate from the Manufacturer must be produced on delivery of the item and pumping unit is to be approved from the concerned Sub Divisional office before procuring. (Make: KSB/Xylem/Kirloskar/Wilo)	2.00	Job	78261.00	156522.00
68.00	Fabrication, providing, fitting and lowering of B Class column pipe conforming to IS: 1239 of length 10 Rft into the 200/ 250/300 mm casing dia. Production well up to the desired depth; The job includes Providing and welding of flanges conforming to IS: 6392, Table-17 and PN 16 to these pipes and welding of flanges in two layers to make the flanged joint strong and leak proof. The pipe of 10 ft length is to be weld on both sides with flanges using welding rod of reputed make. The job includes all types of skilled labours, arrangement of power supply/ diesel Generator set etc required for the job including P/F of suitable size nuts bolts and R.I Gasket in the flanged joints of column pipes. The job further includes cutting of 2 no. rectangular cable slots in each flange. Size : DN 65 Class: B (Medium) (Make: Jindal Hisar/Surya Prakash/Tata)	3.00	Job	3940.00	11820.00
69.00	Providing/supplying and fitting of G.I flanged Rising Main at site. The Pipe shall be hot dip Galvanized, class B conforming to IS 1239. The job includes providing and fitting of M.S Flanges conforming to BIS 6392/1997 Table 17 (Rating PN16). The flanges shall be double welded both from inside and outside of the pipe using standard electrode of reputed make. Flanges (as per IS 6392/1997 Table:17) Thickness shall conform to IS 6392 Part 1st Table-17. The flange welding shall be carried out in double layers using reputed make electrodes to form strong welding joint. Welding Electrode DC Arc Welding using welding electrode having diameter not less than 4mm. Nuts and Bolts Nuts and Bolts (conforming to IS:1363 Part 1st) Rubber Insertion Gaskets Rubber Insertion Gaskets (conforming to IS: 638/79) to be used between flanged joints. The main technical specifications of the pipe are given here under: Size : DN 65 Class: B (Medium) (Make: Jindal Hisar/Surya Prakash/Tata)	1000.00	Mtr	1029.00	1029000.00

  
 Executive Engineer  


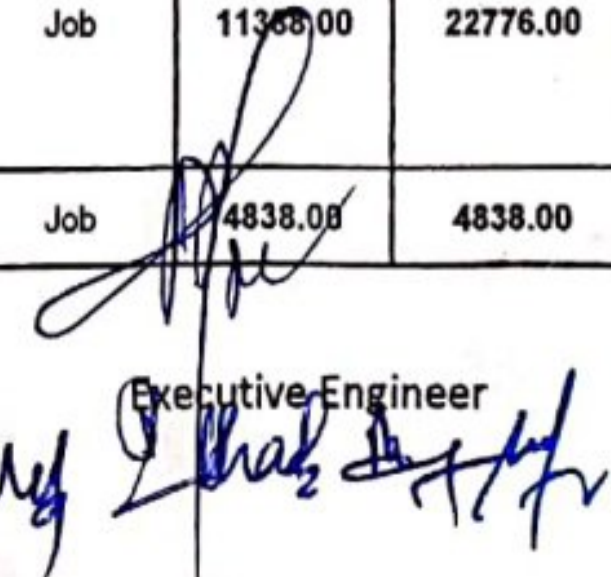
Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
70.00	Earth work in excavation by manual means in trenches for foundation, drains, pipes, cables (not exceeding 1.5 m in width) and for shafts, wells, cesspits and the like not exceeding 10 sqm on plan, including dressing of sides and reaming of bottom lift upto 1.5 m, including getting out excavated earth and disposal of surplus excavated earth as directed (All kinds of soil 01 meter from cutting edge)	270.00	cum	436.00	117720.00
71.00	Filling available excavated earth in trenches, plinth, sides of foundation etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by reaming and watering, lead upto 50 m and lift upto 1.5m	243.00	cum	198.70	48284.10
72.00	Providing and laying hand packed stone soling 50 mm nominal size including filling, spreading, dressing, ramming, complete	3.00	cum	616.00	1848.00
73.00	Centering and shuttering including strutting, propping etc. and removal of form work for Foundation, footings, bases for columns	5.00	Sqm	262.30	1311.50
74.00	Providing and laying in position cement concrete of specified grade including curing but excluding the cost of centering and shuttering all work upto plinth level with 1 : 2 : 4 mix (1 cement, 2 coarse sand, 4 graded stone aggregate 20 mm nominal size)	14.30	cum	6434.00	92006.20
75.00	Fabrication, providing and fitting of washout Tee with arm length 1.2 feet each. The Tee shall be fabricated out of G.I pipe with M.S Flanges conforming to BIS 6392/1997 Table 17 (Rating PN16) fastened with weld joints on three ends. The size of the Tee is given Below Size: DN 65 Class: C Heavy	1.00	Job	4444.00	4444.00
76.00	Providing and fitting of, Ductile Iron double flanged, non-rising spindle soft seated glandless gate/ sluice valves as per IS14845 for regulating the water supply outside the pumping units. The body and bonnet of the valve shall be of ductile iron, wedge with fully vulcanized EPDM rubber (Approved for drinking water) and NBR seal. The Gate/Sluice valve shall be compatible for buried applications and shall be safe to install in both horizontal and vertical positions It shall have electrostatic epoxy coating (approved for drinking water) both inside and outside of the valve. The valve shall be supplied along with hand wheel. Cost on account of Nuts, bolts, gaskets, etc required for the job is included in the scope of work. The job includes providing and fitting of 02 nos. M.S flanges (Table flanges) perfectly adaptable to the inbuilt flanges of the valve which shall be fitted with rising main of the pumping unit at appropriate spots as per site requirement. The job includes the cost on account of P/F of nuts, bolts and gasket required for the job. Size: DN65 PN: 1.6/16 (Make: VAG/Kirloskar/Sachdeva/Sigma Flow)	2.00	No	12942.00	25884.00
77.00	Providing and fitting of Ductile Iron double flanged, Slanted seat swing check valve (NRV) as per IS 5312. The body shall be of ductile cast iron with fully encapsulated vulcanized EPDM rubber (Approved for drinking water). The valve shall be compatible for buried applications and shall be safe to install in both horizontal and vertical positions. It shall have electrostatic epoxy coating (approved for drinking water) both inside and outside of the valve. Cost on account of Nuts, bolts, gaskets, etc required for the job is included in the scope of work. The job includes providing and fitting of 02 nos. M.S flanges (Table flanges) perfectly adaptable to the inbuilt flanges of the valve which shall be fitted with Rising main of the pumping unit at appropriate spots as per site requirement. The job includes the cost on account of P/F of nuts, bolts and gasket required for the job. Size: 65 mm PN: 1.6/16 (Make: VAG/Kirloskar/Sachdeva/Sigma Flow)	4.00	Job	14712.00	58848.00
78.00	Providing, fitting, testing and commissioning of ARV (Air Release valve) as per IS 14845 to be fitted to G.I rising Main. The ARV Shall have the following specifications: - i. Valve type - single chamber, single/double orifice. ii. End connection - flanged ends to IS 1538 iii. Working temperature (- 45°C to -150° c) iv. Test pressure - body / seat 2.5 x PN v. Sealing ring - EPDM vi. Construction -ductile iron with stainless steel floats vii. Coating - epoxy with corrosion resistance Besides the above works, The job also cost on account of P/F R.I gasket, G.I Pipe, nuts and bolts required for installation of ARV and arrangement of gas cutter/ welding set at site. Size: 50mm PN: 1.6/16 (Make: VAG/Kirloskar/Sachdeva/Sigma Flow)	2.00	Job	19394.00	38788.00
79.00	Fabrication, Providing and fitting of 90-120 degree bend/elbow to be fabricated out of G.I pipe, 1 m length and flanged on both ends to make it leak proof. The flanges shall be M.S Flanges conforming to BIS 6392/1997 Table 17 (Rating PN16) and welded on both sides. The job includes nuts, bolts, gaskets etc as per site requirement. Size: DN 65	10.00	No	2171.00	21710.00
80.00	Fabrication, providing and fitting of split type MS clamps 10 mm thick, 2 ft long and 3 inch wide for lowering and holding of pumping unit fitted. The job includes the cost of required size of nuts and bolts. Size: 65 mm	2.00	Job	1499.00	2998.00
81.00	Fabrication of gantry mechanism/CGI Shed by way of providing Structural steel in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of steel primer and 02 coats of paint of approved shade all complete welded. The drawings and Dimensions for Gantry/CGI Shed will be provided by Site In Charge Engineer at the time of execution of job.	1550.00	Kg	102.00	158100.00

  
Executive Engineer  


Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
82.00	Fabrication of gravel Hooper for proper feeding of gravels to the bore well and platform to bear the load of pumping unit, column pipes etc by way of providing and fitting of Steel work welded in built up sectional/framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. The job involves following steel details 1. In stringers, treads, landings etc of stair cases including use of chequered plate wherever required, all complete	228.00	Kg	115.00	25990.00
83.00	Providing and fitting of M.S 4 inch hinges -6 no and M.S handle heavy -2no. Anchor bolts with nuts (M16) of 0.3 m long = 04 No Metallic strip (350mmx50mmx3mm) = 02 No	1.00	Job	2500.00	2500.00
84.00	Supply, Installation and testing of motorized chain hoist with hook suspension along travelling trolley of proper specifications having following features. The chain hoist shall also have the following characteristics - Motor: The basic drive of the hoist be provided with 3 phase squirrel cage totally enclosed induction motor having a high starting torque with class 'F' insulation. The make of the motor be NGEF / SEIMNS / GEC/ Crompton and conform to IS 325 (RPM-1500) Brake: The hoist shall have instant action, Fail to safe electromagnetic disc brake mounted on the end of the motor to ensure minimum safety and reliability when the load is held in its position as soon as the supply to the motor is switched off internally or accidentally. The adjustment & maintenance of break shall be quick and simple Gears: The hoist shall have precision cut spur and helical gears made of alloy steel mounted on bearings and housed in a dust proof gear box. The lubrication of gears be of high viscosity and temperature for longer life of gears Load Chain: The load chain be made of high tensile alloy steel having wear resistance and greatest mobility. The chain should be accurately collaborated, tested and have adequate in built factor of safety for safer operation. Load chain wheel: Specially designed, perfectly machined wheel providing correct grip of load chain made of malleable cast iron makes the hoist most safe and reliable against any failure. Lifting Hook: The lifting hook shall be forged with provision for free swiveling. Limit Switch: The limit switch shall have snap action, shunt type prevent over hoisting or over lowering to ensure maximum safety of operation. Control: The unit shall be controlled by heavy duty air break direction reversing type bidders and electrically inter - locked for safety. Contactors relay, fuses, low voltage transformer be fitted for control voltage and are to be housed in fabricated / pressed sheet steel box dust proof. Push button pendent: The contactors shall be operated by a pendent push button station suspended from hoist by a rope / dog chain to prevent any damage to the pendent cable and for easy operation. Test: The hoist supplied is to be tested at 25% overload and the test certificate of the same be provided at the time of installation. The complete unit as specified above is required to be fitted / tested at site. Besides the above works the job includes Providing and fitting 3-Core 6 sq. mm, 50 m submersible cable for providing power supply to motor of chain Hoist including P/F protection device of suitable capacity. The main specifications of the chain Hoist are given below: Make = Pull Lift/Globe Capacity = 5 ton Hoisting speed = 2.4 M/Min Hoist motor H.P = as per requirement No. Of chain falls = 4 Min. Height of lift = 6 M	1.00	Job	244149.00	244149.00
85.00	Supply, installation, commissioning and creation of 25 KVA 3 Phase (Level 2) pole mounted, outdoor type Electric Sub Station as per the technical specifications given here under - Specifications conforming to IS: 1180 (Part 1) 2014 with latest amendments. Type: HT/LT Transformer Type of cooling: ONAN. Operating conditions: Input =11000 volts Output =433 volts AC supply in 3- phase. Terminals: Input=3 No. HT bush rods with insulators, washer, nuts etc. Output=4 No. LT bush rods switch insulators, washers, nuts etc. Core: The core shall be of high permeability to reduce core losses and the strips shall be of suitable size and gauge. Transformer Coils: Suitable number of HT and LT coils in each leg of the core. The transformer coils shall be fabricated out of superior quality aluminum wire/strips properly wound. The HT transformer is completely filled with suitable grade transformer oil up to required level. The job includes carriage, and all leads and lifts involved. The HT transformer shall be of reputed make from an ISO certified company as per relevant standards and a test certificate shall be provided before installation. The transformer shall also be provided with breather fill with silica jel crystals, conservator with oil level indicator, explosion vet and adequate radiator fins/ Tubes. The impedance of transformer shall be as per IS: 1180 (Part 1) 2014 with latest amendments. NOTE: The scope of the work shall include obtaining of necessary inspection/clearance certificate from the concerned department for all the required equipment. The testing and commissioning shall be completed only after obtaining above certificate. (Make: KIN India/Aditya Power & Controls/JK/Alba)	1.00	Job	67674.00	67674.00
86.00	Providing and fitting G.I Channel /Angle/ Flat of sizes including clamps.	391.00	Kg	123.00	48093.00
87.00	Supply, Installation, Testing and commissioning of Polymeric Gang operated Air break switch, outdoor type, triple pole, suitable for vertical installation, single break provided with locking arrangement at both ON and OFF position consisting of HT post double insulator, copper or copper alloy high pressure heavy contact assembly, rod with bearings, operating handle and 2 length of 32mm dia. GI pipe conforming to IS 1818 1961, 06 No. of Insulators, rated voltage 11KV 200A complete as per IS specs.	2.00	Job	11388.00	22776.00
88.00	Supply, Installation, Testing and commissioning of 11KV polymer fuse Set Horn Gap 3-phase 200 A suitable for vertical installation.	1.00	Job	4838.00	4838.00

Executive Engineer  


Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwanl New & Halwanl Cherward

No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
89.00	Supply, Installation, Testing and commissioning of Gapless Surge arrestor station class, 10KA, 9KV, LA With polymer housing, Station Type.	1.00	Set	7528.00	7528.00
90.00	Supply and fitting of 11 KV polymeric composite pin insulator 12 KV, 5KN, Lightning impulse 75KV Positive, and 80 KV Negative, creepage distance 320mm	42.00	Job	337.00	14154.00
91.00	Supply, installation, erection of 9 mtrs long H T pole of specifications ST- 410 (sp-33). The job further includes drilling of holes for installation of various accessories wherever required the job further includes G I wire earthing of pole as per REC standard	14.00	No	20083.00	281162.00
92.00	P/F of Galvanized nuts, bolts of various sizes as per site requirement	50.00	Kg	138.00	7728.00
93.00	P/F Danger Plate with clamps.	14.00	No	148.00	2072.00
94.00	Providing and fixing G I Barbed wire for anti climbing/ anti climbing devices with clamps.	50.00	Kg	132.00	7392.00
95.00	Providing and Fitting of PG clamps	8.00	No	409.00	3272.00
96.00	Providing and fitting of Galvanized stay set with 50 X 8 mm Stay Clamp, Guy insulator (2no), Anchor plate (200X200X6mm), nuts and bolts, 2 NO- turn buckle, 1.8 m long, 16 mm diameter solid G I stay rod & 7/3.15 mm dia G I stranded wire complete	11.00	Set	4779.00	52589.00
97.00	Painting of poles with Red oxide	14.00	Lit	297.00	4158.00
98.00	Painting of poles with Aluminum paint	14.00	Lit	495.00	6930.00
99.00	Providing and fitting of ACSR as per IS 398 (part-2) 1996 for 50 sq mm ACSR (Galvanised steel reinforced) for fitting of various accessories.	60.00	Mtr	55.00	3300.00
100.00	Supply, Installation and Testing of 35 Sq mm XLPE Aluminum H.T cable (ABC type) of 11 KV grade with following specs. Size (cross sectional area in sq mm) = 3x35 with reinforced wire Phases: Red, Yellow, Blue (Make: Havells/KEI/Finolex)	420.00	Mtr	794.00	333480.00
101.00	Providing and fitting of Anchoring clamps comprising clamp body, plastic wedge, steel bill bracket, straps and buckles or nuts and bolts required for holding of 3 - Core, 35 Sq. mm H.T AB Cable.	14.00	Job	457.00	6398.00
102.00	P/F of 11 KV cable termination kit for connecting 35 Sq mm XLPE cable (ABC type) with the existing HT line near tapping point and HT transformer.	4.00	Job	8732.00	34928.00
103.00	Providing and fitting of LT Distribution box for H.T transformer with MCCB For incomer and SFU for outgoing circuits. Capacity of transformer: 25 KVA	1.00	Job	28118.00	28118.00
104.00	Providing and fitting of PRODIGY LT Metre of following specification complete with all fixtures required for fitting at site Type: E3L100, 3 Phase, 4 wire Measurements offered: KWh, KVARh, KVAh, KVA Voltage: 3x240V(415v), 50HZ Ib: 40A Imax: 200A Battery: Lithium	1.00	Job	28000.00	28000.00
105.00	Fabrication, Providing and fitting of MU-G 15 Modular motor control panel of appropriate size fabricated out of 14 SWG sheet having required openings/vents and protection Class: IP-55 & fitted with accessories as under: a) Bus bar Chamber: The bus bar chamber shall be fitted at the top of the panel horizontally throughout the length. There shall be 3 Nos. of phase bus bar and 1 No neutral bus bar and 1 No earthing bus bar. The bus bars shall be air insulated and made-up of high conductivity COPPER with current density of suitable rating for 100/200 Ampere. All panel compartments shall be provided with suitable cable alley and vertical bus bar alley. Suitable segregation shall be provided in between bus bar chamber and adjoining compartments. The bus bar shall be PVC sleeved with color strips of red, yellow, blue and black and the same be arranged in accordance with IS-375 specs. Electrical clearances shall be maintained between phases, neutral and body as per standards. b) Main Circuit Breaker (Incomer MCCB): Qty. = 02 No. of poles = 4 Pole Current Rating = As per Requirement Rated operational voltage = 415 V + 15 % Rated frequency = 50+/-3%Hz Ambient temperature = 40C Ultimate S.C Breaking Cap. at (415V AC, 50 Hz) = As per requirement Type of release = Thermal-Magnetic Overload protection = 0.8 - 1xIn adjustable Short-circuit protection = 6-10xIn adjustable. Current rating = As per Requirement c) Change over Switch: Qty. = 01 No. Rating = As per requirement Type = Front operated, on load, 4 pole, 400 +15%V, 50 + 3%Hz. d) Motor Back-up Protection MCCB: Qty = 2 No No. of poles = 3P Current Rating = As per Requirement Rated operational voltage = 415 V +15 % Rated frequency = 50 + 3% Hz Ambient temperature = 40C Ultimate S.C Breaking Cap. at (415V AC, 50 Hz) = As per requirement current rating = 200 A b. Submersible starters:- Fully automatic star delta/DOL starters. c. Capacity = As per Requirement Power Specs = 3 Φ, 415 + 15% V, 50 + 3 % Hz. Relay range = As per requirement. Coil Voltage = 380 v	1.00	Job	164999.00	164999.00


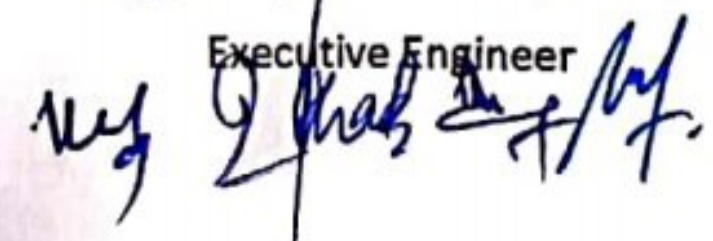
*[Handwritten Signature]*

Executive Engineer

*[Handwritten Signature]*

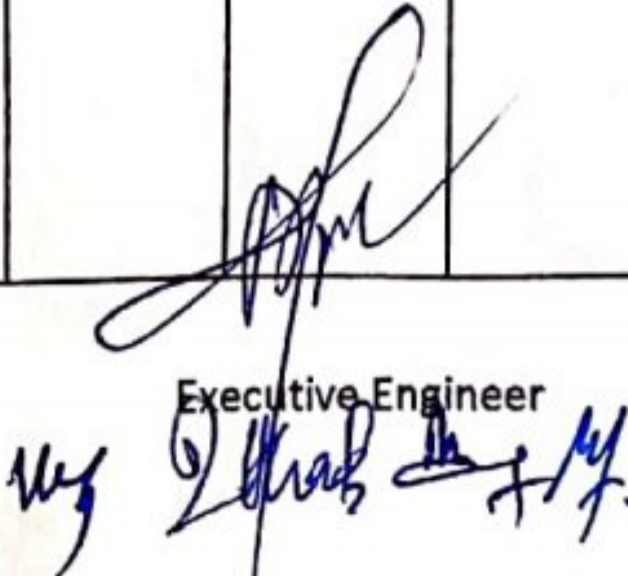
Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
	<p>Protection = single phasing, phase Reversal, phase unbalance (55 ± 5 V), Rated insulation voltage = 690V Terminal capacity = 120 Sq. mm with lug Or above Conformity to standard = IS/IEC 60947-4-1 Qty = 2 No's</p> <p>e) Auxiliary MCCB for Heating/Lighting Circuit Breaker = MCCB (Outgoing) Qty. = 1 No No. of poles = 4P Current Rating = As per requirement. Rated operational voltage = 415 V + 15 % Ultimate S.C. Breaking Cap at (415V AC, 50 Hz) = As per requirement</p> <p>g) Motor Protection Relay: Digital Motor Protection Relay with LCD Display for 3-phase supply with following protections suitable for the Modular Control Panel -                      Protections = Thermal Overload with pre-alarm, Short Circuit, Phase Loss, Unbalance, Phase reversal, Under Current, over current, Prolong starting, Locked Rotor, Under voltage, over voltage &amp; Earth fault.</p> <p>h. M-power module for mobile starter for submersible motor 1F/3P 3 wire IVRS Languages – English, Hindi, Suitable Region- North India</p> <p>f) The panel shall be provided with phase indicators (03 NO) and digital ammeter of range 0-60 A, digital voltmeter of range 0-500 V, and digital frequency meter (01 No for each starter). The enclosure of the panel shall be of excellent fit and finish, corrosion resistant and powder coated gliding hinges for smooth and noiseless movement of windows and advanced locking arrangements.</p> <p>MUG 15 Modular Panel Details/Description item wise</p> <p>i) Bus bar size (10 mtr x 02 mtr x 0.005 mtr x) 8960 kg/m<sup>3</sup> = 8.96 kgs 100A</p> <p>ii) D-sine MCCB 4 pole (DZ1 160N, 108-160, 50KA)</p> <p>iii) Change over switch Front Operated 100A</p> <p>iv) D sine MCCB 3 pole (DNO 100D, 80-100, 36KA)</p> <p>v) Mug x 2 (15 Mug, 13-22Amp relay)</p> <p>vi) Auxiliary MCCB 63Amp 4 Pole</p> <p>vii) MM 10 of L@T (Motor Protection) Motor Protection</p> <p>viii) Module for mobile starter</p> <p>ix) Meters (Ammeter &amp; voltmeter) 2No. and Freq Meter</p> <p>x) Indicators LS</p> <p>xi) Over load and Under Voltage Minlec</p> <p>(Change Over &amp; MCCB Make: L&amp;T/Havells/Siemens)</p>				
106.00	<p>Providing, fitting, testing and commissioning of 25 KVA voltage stabilizer as per specifications below:                      Type of voltage controller: Manually operated copper wound, 3-phase, AC power supply multi step.                      Type of Regulator: Double plate type with electrolytic copper contacts. Input voltage : 250-400 volts.(3 phase)                      Output voltage : 400 ±10% volts.                      Frequency : 50 ±3 C/S.                      Windings : Electrolytic grade copper of adequate section, vacuum impregnated and Oven-dried.                      Insulation : Fiber glass insulations to tested parameters. Cooling : Naturally, Oil cooled                      Temp. Rise (Max) : 30°C above ambient Mounting : On Uni-directional wheels. Correction rate : 30 volts per step Wave form distortion : virtually nil                      Duty cycle : 100% continuous.                      Enclosure : MS sheet enclosure in pressed CGR Sheet powder coated with radiators.                      Core laminates : High grade, low eddy loss, grain oriented silicon steel laminations.                      Load : Three phase induction motor load. Load Amperes (continuous)                      Overload in 24-hours operation: 10% above continuous Ampere rating.                      The voltage stabilizer shall have T-oil level indicator gauge preferably glass type tube or otherwise visible to naked eye. The top of the container to have a display panel for housing 02 numbers Digital voltmeters (0-500V) along with 4-way selector switch and set of neon indicators for incoming and outgoing phases (06 No's).                      Insulating media (T. Oil) of 11 KVA grade to be provided and filled up to top level, with dielectric strength of 5 KV at 4m air gap. The T-Oil of specific grade should be provided in separate barrels and filled at site up to top level.                      The voltage Stabilizer shall be accepted with manufacturers dully stamped test certificate and shall have name plate with specifications.</p>	2.00	Job	53582.00	107164.00
107.00	<p>Providing and Fitting of XLPE, 1.1KV and 11KV grade Armoured Aluminum Cable of various sizes conforming to IS: 7098 part 1st as service line from the HT transformer to control panel including necessary thimbling, crimping, taping etc.</p> <p>i) 35 sqmm, 3.5 core, LT cable (Make: Havells/KEI/Finolex)</p>	90.00	Mtr	362.00	32580.00
107.01	<p>ii) 10 sqmm, 2 core, LT cable (Make: Havells/KEI/Finolex)</p>	50.00	Mtr	154.00	7700.00
108.00	<p>Providing and fitting of 3-Core flat submersible copper cable conforming to IS: 694 (Part 1st) – 1964 &amp; IS: 694 (Part 2nd) - 1964 for Submersible Pumping Unit and other electrical Equipment. The cable connections terminal shall be fitted with copper thimbles of required size. The main specification of the cable is given below:                      Size: 10 sq.mm (Make: Havells/KEI/Finolex)</p>	270.00	Mtr	454.00	122580.00
109.00	<p>Providing and fitting of 25 mm square single core copper cable for interconnecting various electrical gadgets as per IS 694: 2010 along with thimbling as per requirement. (Make: Havells/KEI/Finolex)</p>	180.00	Mtr	365.00	65700.00
110.00	<p>Providing and Fitting of cable tray of suitable size for carrying the cable inside the machinery room.</p>	50.00	Mtr	1000.00	50000.00

  
 Executive Engineer  


Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwanl New & Halwanl Cherward

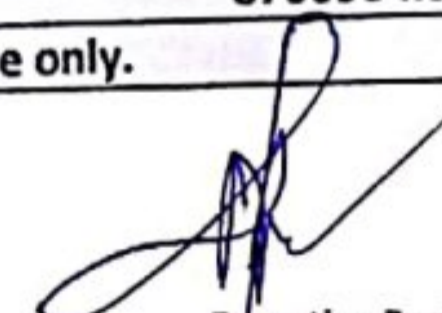
No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
111.00	P/I of earthing station for electric substation. LT panel, DG Set and stabilizer comprising of company fabricated earthing electrode as per IS: 3043. The job includes Auguring of bore of required dia/depth for installation of electrode along with backfill compound mixed with soil and all other items required thereof for achieving the best result. The job includes connecting of electric gadgets through GI strip as per relevant standards. Safe earthing electrode size: 65/80 mm dia (As specified), Length: 2000 mm. Back fill compound: 30 kg.	6.00	No	10462.00	62772.00
112.00	Illumination of Premises. Providing and erection of 9 Mtr long Hot Dip Galvanized octagonal pole (single Section) with bottom 150mm, top 75mm wide, thickness 3mm with 70 Microns Zinc coating having inside arrangement for providing of power connection along with following items: 1) 3 Way Terminal Connector 20 Amp 2) 3 No MCB 8 Amp The job includes fabrication, providing and fitting of three arm GI structure at the top having 120° angle between arms and each arm having 15° inclination with respect to horizontal plane. Each arm should be of 2' length and size and shape appropriate as per requirement of the luminary. The job also includes providing and fitting of required length of flexible multistrand 2 mm copper wire from each terminal connector to each holding arm. The pole is mounted on 1:2:4 Cement concreting of size not less than 2'x2'x6" (cost of concreting not included in the job) using 04 No anchor bolts of required size not less than 7" in length. The complete job includes earthing in GI Electrode as per relevant IS Code.	1.00	Job	21168.00	21168.00
113.00	Providing, installation, testing and commissioning of area lighting 120 Watt LED (Street Light Type) on top of octagonal pole (Make: Havells/Phillips/Bajaj). Having following specs: Input: 90-240 V 50 Hz Power Factor: >0.9 Colour Temperature: 4K - 6.5K Beam Angle: 120° - 170° Lumens: >12000 Operating Temperature: -20°C to 60°C The LED is pressure die cast aluminum housing with power coated finish and having Ingress Protection up to IP-68. The LED is properly fitted on the arm of the pole and connected to the copper wire as provided in the high mast pole.	3.00	Job	8866.00	26598.00
114.00	Providing and installation of Junction Box with DP 32 A MCB to serve as Main switch for LED Lighting. The job includes making of electric connection to the circuit.	1.00	Job	2162.00	2162.00
115.00	Providing, Installation and testing of 2KVA fully automatic voltage stabilizer with input voltage 70-240 V and output 220 V. The stabilizer shall be installed and connected to the electric circuit as per location provided by site in charge.	1.00	Job	7766.00	7766.00
116.00	Supply, installation, Testing & commissioning of 1000VA Full Sine wave power inverter (Make: Luminous/Livguard/Microtek/Exlde) including Providing / Installation of 12V, 180AH Tubular inverter Battery with trolley and cover. (Make: Amaron/Exlde/Luminous) with 2-core 6mm <sup>2</sup> Cu wiring as per site requirement along with other accessories like SS-Combine (02 No's), 3-pin plugs etc of reputed make for proper fitment and installation of the item.	1.00	Job	34053.00	34053.00
117.00	Providing, laying & fixing of shock proof rubber mats with adhesive/bonding material on the floor of the pump house, covering area around electro-mechanical machinery for safeguarding the life & limb of the workmen due to possible leakage of current & short circuit. The floor surface shall be made good & shall be free from dust, grease, foreign material & moisture free. The mats shall be as per IS 15652:2006 & shall have the following specifications: - Composition: Rubber (synthetic mats for electrical purpose) Thickness: - 2.5mm Size: - 1M wide. The rubber mats shall be accepted with manufacturers test certificate.	10.00	Mtr	1205.00	12050.00
118.00	TOOL KIT For Maintenance: - The Tool Kit for maintenance shall comprise of the following and all the items as mentioned below shall be of: Providing of tool kit consists of following items i. Double ended Spanner (Chrome plated) 02 sets complete ii. Double ended Ring spanners chrome plated 02 sets complete iii. Allen key set black finish 02 sets complete iv. S-16 MXL, S- 16 H X L Socket Set (19 sockets + 6 Accessories) - 01 No. Combination Pliers insulated with thick C.A sleeve; size in mm 165, 210, 255 each - 02 No. v. Long nose plier insulated with thick C.A sleeve; size in mm 165, 205 each - 02 No. vi. Side cutting plier insulated with thick C.A sleeve; size in mm 165, 205 make - 02 No. vii. Insulated screw Drivers Blade Blade Tip Quantity length in dia. in dimensions mm mm in mm 50 3 1.6 x 0.4 02 75 3 1.6 x 0.4 02 100 3 3 x 0.4 02 125 3.5 3.5 x 0.5 02 150 3.5 3.5 x 0.5 02 200 4 4 x 0.6 02 300 5 5 x 0.8 02 viii. Hammer with handle weight - 110 mg, 340 gm, 600 gm -each - 1No. . ix. Heavy duty pipe Wrench length in mm - 200, 300, 600 each - 01 No. x. Electric Multimeter =1No xi. Digital multimeter - 1No. xii. Digital Clamp tester capable to measure up to 400A - 1 No. xiii. Hack saw frame with hack saw blade - 01 No. xiv. iv. S-16 MXL, S- 16 H X L Socket Set (19 sockets + 6 Accessories) - 01 No.	1.00	Job	28840.00	28840.00

Executive Engineer  




Annexure 'B' to this Office Allotment Order No. 26 of 06/2023 for WSS Halwani New & Halwani Cherward

No	Description of Work / Item(s) with technical specifications	No. of Qty	Units	Alloted/ Accepted Rate	Amount
119.00	Providing of good quality bedding for night stay/Shift consisting of - i) Mattress with warm cover size 6x3 (8kg)- 02 No.s ii) Quilt with warm cover size 5x8 (8kg)- 02 No.s iii) Pillows with covers - 02 No.s iv) Single bed warm blankets with one sided Fur- 02 No.s The filling material for mattress, quilt and pillow shall be of good quality cotton b) The job also includes providing of pressure cooker 5lt 02 No.s, Steel plates (utensil) 5lt 02 No.s, cooking heater 01 No, room heater 01 No, steel buckets 10 ltr capacity 01 No, Plastic bucket 10 ltr capacity with Mug 02 No.s each, steel glasses 06 No.s, steel Plates with large spoons and bowls 03 No.s each, Cup and Saucer set (01 No. Set) and 5kg Gas cylinder with burner stove. The job also includes providing of thermo-cool 1.5x1.2 along with excel matting of 1.5x1.2 size. The job also includes providing of unbreakable Plastic Chair table set consisting of chairs 04 No.s, extra heavy Table 01 No. The job also includes providing of good quality safety Door locks (03 No.s) of Godrej, Link locks	1.00	Job	39619.00	39619.00
120.00	Fabrication of 7 (L) x 6 (B) x 1.5 (H) angle iron bed for operators with back height of 2 feet by way of providing and fitting of Structural steel in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete welded. The detailed drawing will be provided by site incharge	114.00	kg	93.00	10602.00
121.00	Providing and fitting of 19 mm thick multilayered ply sheet of size 6 x 3 feet, 3 no.s including cutting, fixing all complete including painting of the ply sheet by one coat of primer and two coats of enamel paint	54.00	sft	140.00	7560.00
122.00	Providing of solar electrical lantern chargeable on both solar & electrical 220v supply	1.00	Job	1911.00	1911.00
123.00	Providing of bamboo ladders 18 feet long along with 15 feet long Link rods and HT Glove pair (01 No each)	1.00	Job	7350.00	7350.00
124.00	Providing of bamboo ladders 18 feet long along with 15 feet long Link rods and HT Glove pair (01 No each)	1.00	Job	1205.00	1205.00
124.00	Providing of 1 KW heat convector for operators for winter season.	1.00	Job	3998.00	3998.00
125.00	Providing and fitting of 01 No. LED (scroll type) sign board fabricated out of stainless steel and metal showing the names of water supply scheme and the Department. Size: 6'x1'6" = 9 sft	9.00	Sft	250.00	8750.00
126.00	Providing and fitting of 01 No. angle iron/sheet metal board duly painted showing various specifications of the mechanical and electrical equipment installed at site of appropriate sizes. size: 7x5 feet	35.00	sft	250.00	8750.00
127.00	Providing and fitting of L.T. 25 Sq. mm, 1 core, capable to work up to 1.1 KV, XLPE insulated, galvanized steel strip armored copper cable conforming to IS : 7098(part -1) 1988 with latest amendments. The job includes providing and fitting of suitable rating copper thimbles duly crimped and taped at conductor ends by hydraulic crimping tool. The job includes earth work in excavation wherever required for laying of cable underground. (Make: Havells/KEI/Finolex)	150.00	Mtr	365.00	54750.00
128.00	Providing corrugated G.S Sheet on all sides of DG Set shed roofing including vertical/ curved surface fixed with polymer coated J or L Hooks, bolts and nuts 8 mm dia. diameter with bitumen and G.I limpet washers filled with white lead, including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete (upto any pitch in horizontal /vertical or curved surface) excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 1.25 mm thick with zinc coating not less than 350 gram/m2	66.00	Sqm	1713.00	113058.00
129.00	Providing, Installation, Testing & Commissioning of complete switchgear unit for protection of D.G Set consisting of 200A MCCB 3- pole, 415 V, 50 KV breaking capacity housed properly in cubical enclosure made up of M.S SWG - 16 sheet steel (outdoor type) duly powder painted with anti-corrosive paint comprising of three compartments for incoming / outgoing circuits and MCCB. The panel should have adequate double locking Arrangement with Cu- Bus Bar 12x40 mm with Bakelite insulation and LT Arrangement selector switches, phase indicators. The equipment should be installed at appropriate height in a stand consisting of 50 x 50 x 6 mm angle grouted in ground with appropriate cement bottoming as per the IS standard.	1.00	Job	39422.00	39422.00
130.00	Carnage of sand, stone aggregate, stone soling by mechanical transport including loading, unloading and stacking (average distance-5km).	70.00	cum	197.00	13790.00
				<b>8700904.540</b>	
<b>Total in Figures:</b>					
<b>Total in Words: Rupees Eighty-Seven Lac, Nine Hundred &amp; Five only.</b>					

  
 Executive Engineer  
 Jal Shakti (PHE) Mechanical Division  
 South Awantipora

Executive Engineer